Ecophon Akusto™ Screen

Ecophon Akusto™ Screen has an exposed profile system. The size of the product is 1500 x 1200mm, thickness 40 mm. Available in Texona surface. Suitable for open space offices. Combined with a sound absorbing ceiling to achieve excellent acoustic properties in the room.



SYSTEM RANGE

	Size, mm	1500x1200
	Freestanding	•
	Thickness	40
	Inst. Diagr.	M526







Akusto Floor foot

Akusto Floor corner


Akusto Screen system

٨٨

Acoustic


Sound Absorption:

Sound absorption and sound attenuation test results according to ISO 20189.

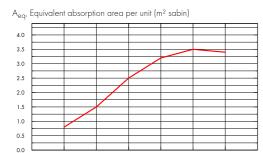

Akusto Screen, size 1500x1200 mm

Frequency Hz



- Akusto Screen, size 1500x1200 mm

Frequency Hz

	THK	A _{eq} , Equivalent absorption area per unit (m² sabin)					
	mm	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
1500x1200	40	0.8	1.5	2.5	3.2	3.5	3.4

	THK	Screen sound attenuation ΔLs (dB)					\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	
	mm	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	Weighted screen sound attenuation (dB)
1500x1200	40	4.0	7.0	6.0	8.0	12.0	16.0	10.0

Indoor Air Quality

Certificate / Label
French VOC, A





Circularity

Fully recyclable.



Humidity Resistance

Class A, relative humidity 70% and 25 $^{\circ}$ C, according to EN 13964:2014



Visual appearance

Texona in white has high light reflectance. For more information regarding visual appearance of the various surfaces: See Ecophon Colours and surfaces.



Cleanability

Weekly dusting and vacuum cleaning.



Use of disinfectants

Texona Ginger, Sea salt, Thyme, Oyster and Garlic withstand the frequent use of ethanol (70%)-based disinfectants. Dampen a soft polyester microfiber cloth with the solution and wipe the surface in gentle circular movements.



Installation


Installed according to the installation guide that is delivered with the product.



Mechanical properties

The product is tested according to EN14073-2 and EN1023.

Akusto Screen

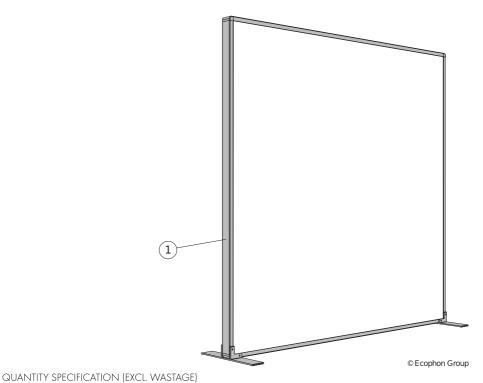

Size, mm
1500x1200

© Saint-Gobain Ecophon AB