




Jaymart





**Grime
Capra
Aluminium
Entrance Matting
Information &**

An eco - friendly entrance matting system combining aluminium scraper wipers with Tretford goat hair cord. With replaceable inserts.

Please consult with Jaymart on product suitability

Grime Capra Specification

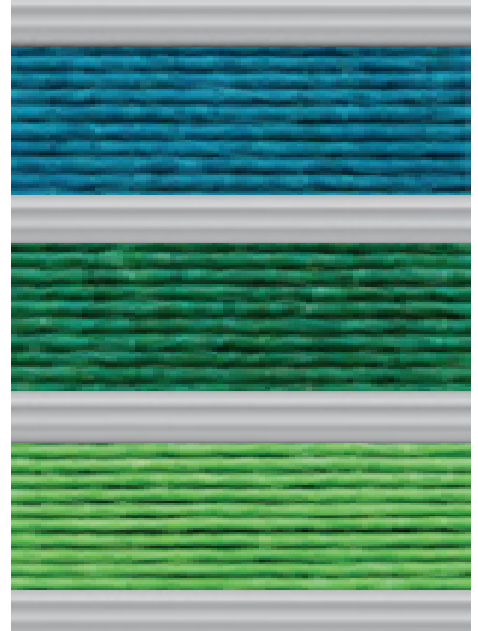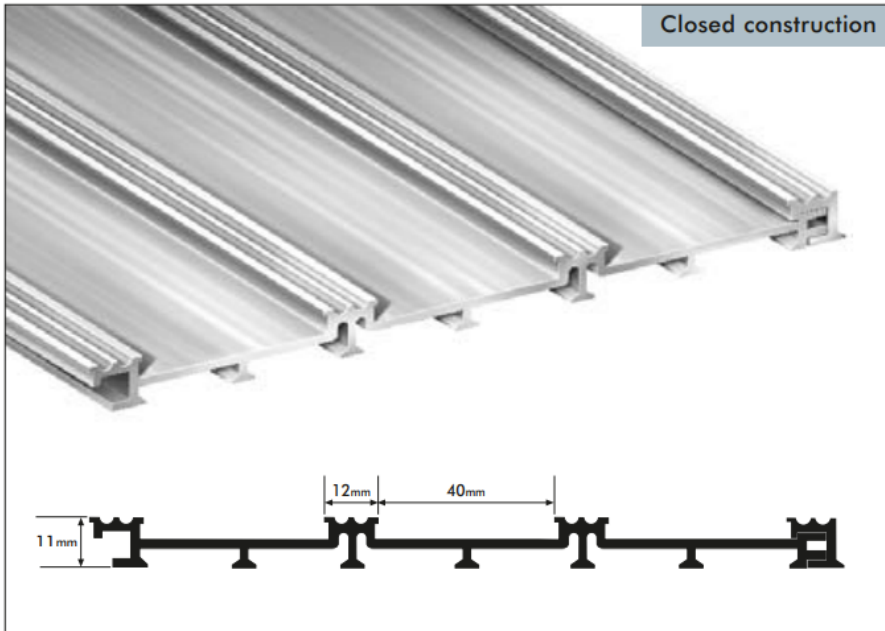

Description

A matting consisting of strips of very heavy duty Natural goat hair (Tretford Cord) available in 41 colours secured between rigid silver aluminium scraper bars. Designed for indoor use in shops, public buildings, schools, offices, hotels, leisure centres, train stations, bus stations and hospitals.

The matting can be supplied in virtually any size or shape but, for reasons of safe handling, it is recommended that the component mat sections, which can be butted together, do not exceed 2m

The Panels interconnect on the front and back panel, the panels on the left to right can make up required by butting panels side by side. The Jaymart system allows for perfect rib alignment without the need for T Bars.

Grime Capra is 14mm thick and available in colours detailed below.

Consult Jaymart Rubber & Plastics Ltd technical literature for details of the finishes available.

Jaymart Rubber & Plastics Ltd can also provide a design and specification service and it is recommended that they be consulted early in the design process.



Proudly Manufactured in The UK



100% Recycled Aluminium



Grime Raincheck Complies with BS 8300 - 2:2018 for an inclusive and accessible environment

Wheel Chair Friendly

14mm
Gauge



Key Features

They trap up to 90% of dirt and moisture, therefore reducing cleaning costs and use of harmful cleaning chemicals

They help to protect the expensive floor finishes reducing the amount sent to landfill.

The panel construction, which allows for rib alignment between panels, renders them stronger than wired construction types which can snap or bend. This also facilitates replacement of insert strips in the unlikely event of damage or desire to change colour scheme. Leading to a useful lifespan of 30 years when refurbished.

This also allows for more elaborate designs to be incorporated if required.

The Insert materials can be customised to maximise performance of the product and if required to make a statement upon entering the building.

Logos can easily be incorporated into the mat at very reasonable costs.

They can be surface mounted or installed in a recessed matwell.

The mats incorporate 100% Recycled Aluminium and are also easy to recycle after useful life, and so are an environmentally friendly product.

Now can be anodised in colours including antique bronze and black.

10 year warranty.





Our 4 step process to a cleaner environment

Step 1

The best way to keep your premises clean is to stop dirt from even getting through the front door. Effective exterior matting scrapes clean and wipes dry, leaving the worst dirt and grit outside, and allowing subsequent interior matting to clean even better.

Step 2

Working in a similar way to exterior matting, this is similarly tough and durable matting that carries on the work to remove the last of the most damaging soil and grit, and continue the drying process.

Step 3

With the worst of the damp and debris now dealt with, secondary internal matting is a high-specification, high-performance product that finishes the dusting and drying.

Step 4

The foyer is one of the highest traffic areas in your building so, however effective your entrance matting, easy to clean, highly durable and attractive carpet that always looks its best will help you make a great first impression – every time.

Environmental Impact & Sustainability

Our Products Use 100% recycled aluminium and can be recycled after use making our aluminium mat products very environmentally friendly. This combined with the ability to replace the insert material rather than replacing the whole mat, means that although not directly eligible for BREEAM Credits selecting Jaymart will help in supporting your BREEAM certification.

We manufacture in the United Kingdom to precise specifications/ measurements. This means Jaymart can reduce waste and transport.

Our products are extremely Hard wearing and will reduce the need for frequent replacement to support BREEAM MAT 05 criteria and also minimise the use of harmful cleaning chemicals and cleaning/ maintenance costs for the end user.

BREEAM MAT 01 addresses the environmental impact through the life cycle of the product. The Jaymart aluminium entrance matting system have the ability to refurbish rather than replace means that our products can further support your aims. It will also help with meeting BREEAM MAT 06 requirements. We can also offer products made from natural inserts from sustainable sources to further meet environmental aims. The expected useful lifespan when refurbished is 30 years approximately dependent on wear and correct maintenance being carried out.



Manufactured in United Kingdom



100% Recycled Aluminium



100% Econyl Recycled Nylon Yarn



Grime Capra Specification

Typical Specification

N10

General Fixtures/ Furnishings/ Equipment

300

Entrance Matting

40

Miscellaneous Fittings

Manufacturer

Jaymart Rubber & Plastics Ltd

Roman Way Crusader Park Warminster Wiltshire BA12 BSP

Tel: 01985 218994 Fax: 01985 217417

email : sales@jaymart.co.uk Web: www.jaymart.co.uk

Reference

Grime Capra Closed 14mm

Application

Internal High Traffic Areas **(Step 2)**

DDA Compliant can be used in conjunction with wheelchairs and shopping trolleys.

Closed Construction Heel Safe

Aluminium Finishes Available

Standard Mill Finish & Anodised Finishes (Special Order)

Composition

Made from 100% Recycled Aluminium

Thickness/ Depth

14 mm

Weight

16 Kg per m2

Construction

Closed Interlocking Panel System

Pile Type

Tretford Cord - 41 colourways

70% Goat Hair

30% Nylon 6

Carded Fibres formed into continuous corrugation and bonded to a jute underlay

515 Silver, 538 Silver Birch are made from undyed goat hair

Classification

Tested to BSEN 130: 2005 Class 33 LC2 Contract Wear

Fire rating

EN ISO 11925:2010, EN ISO 9239-1: 2010

Cfs- S1

Backing

Jute

Colour Fastness

(BS1006: 1990)

To Light : 5 - 6 very slight to none

Water Fastness : 5 Very Slight

Warranty/ Guarantee

10 Year Subject to correct Maintenance and Cleaning procedures being carried out

Slip Rating

>PTV 36

Fixing

Grime Dirtcheck can be surface mounted or in a recessed matwell

Recessed matwell sample

LEVEL SCREED

Aluminium/brass matwell frame

Matting Type	Recommended Frame Section (Y)	Finished Recess Depth (X) (Dependent on gauge of your choice of insert material)	Surface Mounted Ramping
Street Range Low Profile	32 x 32 x 5mm	16-20mm	Safe-T-Edge
Street Range Standard	32 x 32 x 5mm	20-22mm	Bevalu II
Buffer Zone Range	32 x 32 x 5mm	16-20mm	Safe-T-Edge
Alligator Range	32 x 32 x 5mm	14-20mm	Safe-T-Edge
Grime Range	25 x 25 x 5mm	11-17mm	Alu-Ramp
Grime Rail Firefighter	38 x 38 x 6mm (special section)	14-15mm	Safe-T-Edge

Ramped sample

SOLID BASE

Aluminium ramp

Aluminium ramp



515 Quartz




555 Wild Rice



571 Mushroom



538 Silver Birch




601 Truffle



532 Sisal



512 Dapple Grey



572 Milk Chocolate




573 Tobacco



523 Zinc




520 Damson




534 Anthracite



590 Coffee Bean



714 Dark Chocolate



632 Granite



568 Jonquille



585 Orange Squash



570 Strawberry



591 Salmon




564 Amber



560 Curry



588 Rose



524 Russet




559 Burnt Orange



581 Deep Purple



633 Garnet



582 Grapefruit




584 Blackberry



592 Purple




514 Bilberry




517 Riviera




516 Brilliant Blue




575 Cornflower




567 Lagoon Blue




565 Evergreen



566 Lichen




569 Clover



556 Fern



580 Lettuce Leaf



558 Peacock



519 Sage

Tretford Cord Specificatiion

Construction		Rib
Pile Content		70% Goat Hair 30% Nylon 6
Secondary Backing		Jute
Pile Height		5mm
Total Height		7.2mm
Total Weight		3.7kg per m2
Wear Classification	EN1307	33
Luxury Classification	EN1307	LC2
Castor Chair	EN985	A continuous use
Fire Classification	ISO13501-1	Cfl - S1
Fastness to Light	ISO105-B02	>5
Impact Noise Rating	ISO10140	24db
Sound Absorption	ISO354	aw 0.20
Anti-static	ISO6356	< 1.3k/V
VOC'S		Promotes good indoor quality
Mothproofing	EN12673 (1998)	Moth Resistant

Grime Capra Cleaning & Maintenance

Cleaning and Maintenance


Grime Capra entrance mats are designed to prevent the foot borne ingress of dirt and moisture into a building.

The aluminum ribs of the mat scrape dirt from shoe soles, whilst the Dirtcheck Econyl recycled Nylon inserts with monofilament brushes offer brushing action/ resistance and absorb moisture. The inserts are quick drying thus making a more effective entrance matting system.

Daily Cleaning

Regular maintenance is vital to ensure that **Grime Capra** remains effective.

Normal daily soiling can be dealt with using a suction vacuum cleaner. A 2000-Watt model will give better results than a lower powered model. The use of rubber bladed wet floor tool attachment should increase the effectiveness of the cleaning.

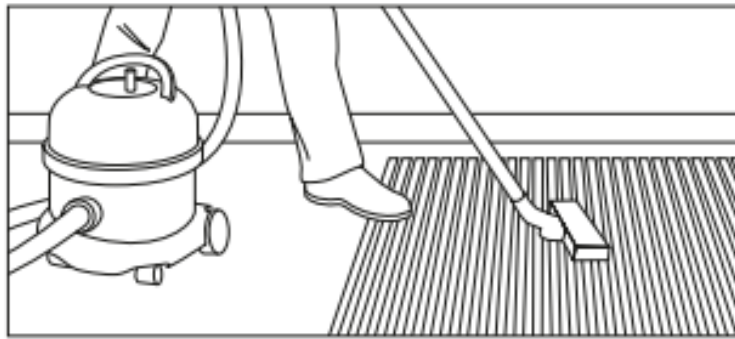

Periodic maintenance

Best results can be achieved by the periodic use of a spray extraction carpet cleaning machine.

The use of a mild detergent (neutral pH) cleaning solution in the carpet cleaning machine should loosen ingrained soiling and aid the removal of oils and grease. More stubborn stains should be treated a solvent-based spot remover prior to re-cleaning with the detergent solution.

Chewing Gum can be removed by freeze spraying or with a proprietary chewing gum remover and then scraped or combed out of the matting carpet pile. This should be done before the full cleaning process is started.

Grime Capra mats have replaceable Goat Hair Inserts (Tretford Cord)

Depending on the regularity of maintenance and the volume of foot traffic, the strips may require replacement at infrequent intervals.

Replacement Goat Hair Inserts (Tretford Cord) may be obtained from **Jaymart Rubber & Plastics Ltd.**





Jaymart

**Jaymart Rubber & Plastics
Limited**

**Roman Way, Crusader
Park,**

Warminster

BA12 8SP

Tel 01985 218994

Email: sales@jaymart.co.uk

www.jaymart.co.uk