




*Jaymart*

**Rubber  
Flooring  
Systems**

**Hammer Terrazzo  
& Slate Terrazzo  
Design**

**Rubber Flooring  
Colours & Technical  
Information**

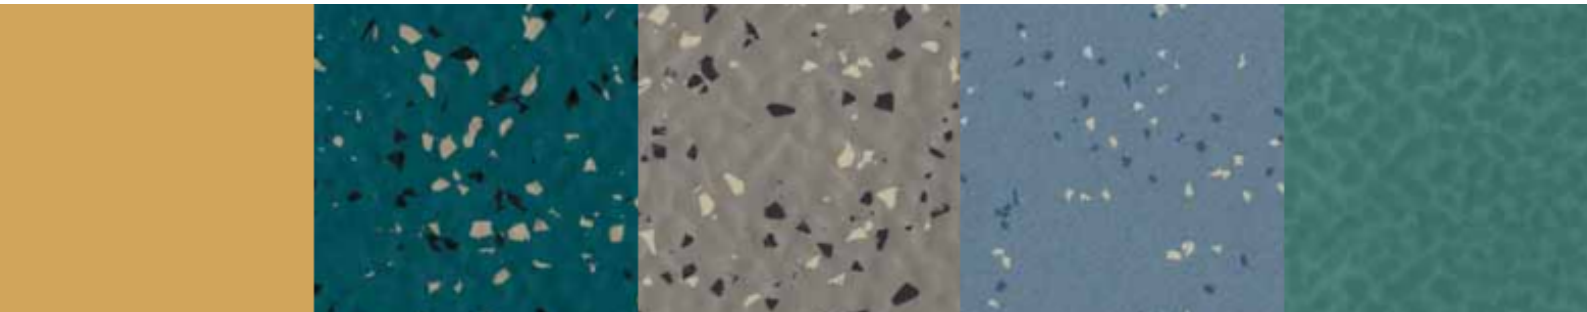

## Tough choice


For decades, rubber flooring has been one of the world's most popular hard-surface flooring types for a wide variety of indoor situations, such as airports, department stores, kindergartens, schools, hospitals, offices and residential buildings. Now, after many years of research, development and heavy testing, Jaymart brings you a new generation of rubber floorings. Jaymart's Rubber Collection is a range of innovative products that are tougher, more flexible and more suitable in more situations than ever before. These floorings are made of natural and synthetic rubber, using eco-friendly colour pigments and mineral fillers, yet every product in Jaymart's range is characterised by its increased load-bearing capacity and suitability for installation under the most varied and difficult conditions. In heavy traffic situations, rubber flooring has for a long time been the obvious choice. It's safe, durable, flexible, low maintenance, and it's tough. Now, with the range and improved characteristics of Jaymart's rubber flooring, making a tough flooring choice has never been easier



## Responsible choice

Jaymart's rubber flooring has been developed to improve performance and safety while also being more ecologically responsible. It has a lifetime cost that is well below most other flooring materials, and can also now be used in nearly any flooring application, including directly above under-floor heating. The floorings are compatible with eco-friendly and solvent-free dispersion adhesives, they contain no PVC, formaldehyde, cadmium, asbestos, CFHC or plasticisers, and will not release any harmful substances in any situation.




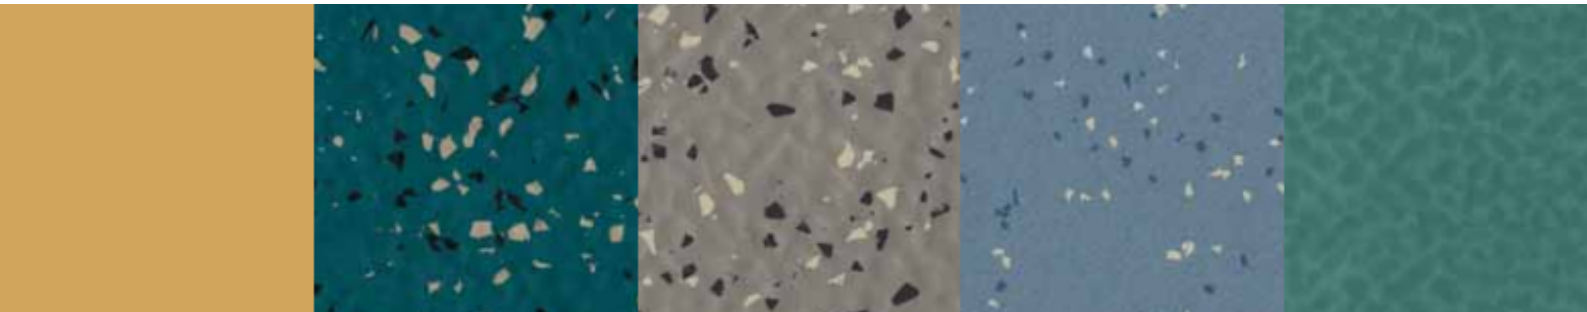


## Versatile choice

Rubber is a versatile, heavy duty, environmentally friendly floorcovering.

Jaymart can offer a wide range of rubber flooring in rolls and tiles, in an extensive and vibrant colour palette for use in every application imaginable such as Gyms, Airports, Banks, Barracks, Public Buildings, Apartment Blocks, Chain Stores, Cinemas, Colleges, Office Buildings, Department Stores, Factories, Hospitals, Hotels, Homes, Sports and Leisure Centres, Stadia, Theatres, Universities

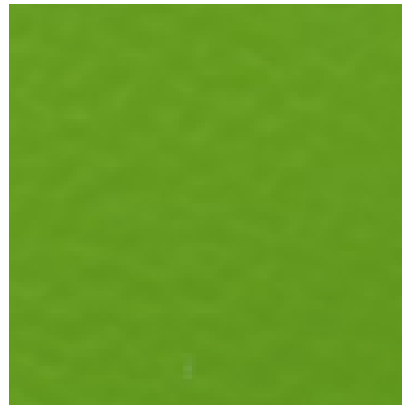

## At A Glance

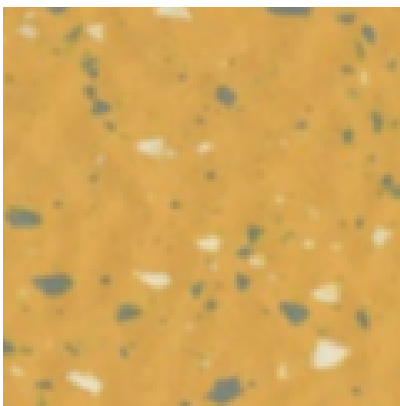


Our range of rubber flooring offers the following key features and benefits


- Rubber is extremely durable and hardwearing leading to long life expectancy and further conservation of material resources.
- Jaymart rubber flooring is coated with a factory applied finish to prevent marking and making it easier to maintain reducing cleaning costs and use of harmful chemicals to maintain the floorcovering.
- Rubber is environmentally friendly - it contains no PVCs, Plasticers or halogens. Leading to a healthier environment in the application
- Toxologically safe
- Flame retardant – Rubber flooring guarantees low Opacity and smoke toxicity in the case of fire.
- Good resistance to chemicals (Even diluted acids!) and oils

Jaymarts range of superior quality rubber flooring is a bespoke range made especially for your project. Available in a phenomenal range of designs and colours there is something for every type of project and application. We can also work with you on bespoke colours subject to minimum order quantities. Please consult with our technical team for more information.

# HAMMER TERRAZZO / HAMMER TERRAZZO AUTO



S 122




S 110




S 125




S 124




S 32




S 13




S 12




S 118




S 119




S 107




S 121




S 112




S 14




S 104




S 108




S 17




S 113




S 101




S 115




S 106




S 20




S 11



S 126




S 103



S 116



S 117



S 111



S 105

Hammer is a heavy duty tile with non-directional colour chips inset into a hammerblow surface. The textured surface has been designed to limit the extent of light reflections


500x500 | 1000x1000mm | 2,5 mm | kg/m<sup>2</sup> 4,00  
 500x500 | 1000x1000mm | 3,5 mm | kg/m<sup>2</sup> 5,50

CE EN 14041 B1 s1 C3 E1 HCHO EN 685 22 32 42 23 34 43


3,5 mm 3,5 mm

## SLATE TERRAZZO


Slate Terrazzo is a heavy duty tile with non-directional colour chips inset into a Slate embossed surface. The textured surface has been designed to limit the extent of light reflections

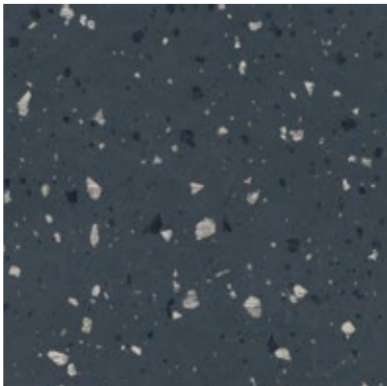

AD 32

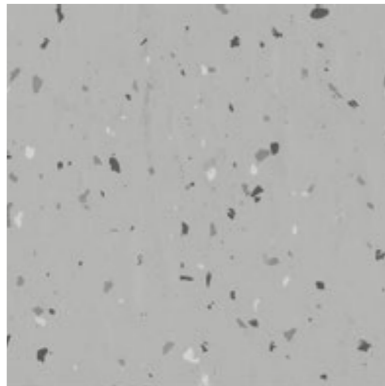

AD 08

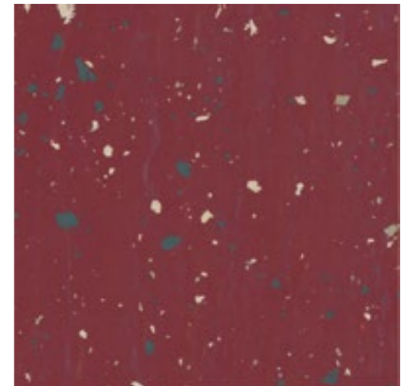

AD 75

			Hammer Terrazzo	Slate Terrazzo	Hammerlock Terrazzo
Proprietà secondo EN 14 041/EN 12 199/EN 1817 <i>Properties according to EN 14 041/EN 12 199/EN 1817</i>	Norma di prova <i>Test method</i>	U.m. & Requisiti <i>U.m. &amp; Requirements</i>	Valori medi risultanti da collaudi della produzione in corso <i>Average test results from running production</i>		
Spessore <i>Thickness</i>	UNI EN ISO 24346 (Ex. EN 428)	Valore medio senza retro espanso $\pm 0,15$ mm	2,5 mm	3,5 mm	5,0 mm
Durezza <i>Hardness</i>	UNI EN ISO 7619-1	$\geq 75$ Shore A	88 $\pm$ 5		
Resistenza all'abrasione a 5 N di carico <i>Abrasion resistance at 5 N load</i>	ISO 4649 Procedura A <i>Procedure A</i>	$\leq 250$ mm <sup>3</sup>	160 mm <sup>3</sup>		
Impronta residua <i>Residual indentation</i>	UNI EN ISO 24343 (Ex. EN 433)	Valore medio $\leq 0,20$ mm a spessore $\geq 2,5$ mm <i>Mean value <math>\leq 0,20</math> mm at thickness <math>\geq 2,5</math> mm</i>	0,050 mm	0,080 mm	0,150 mm
Stabilità dimensionale <i>Dimensional stability</i>	UNI EN ISO 23999 (Ex. EN 434)	$\pm 0,4\%$	$\pm 0,3\%$		
Flessibilità <i>Flexibility</i>	UNI EN ISO 24344 (Ex. EN 435 Procedura A - Procedure A)	Diametro del mandrino 20 mm nessuna formazione di fessura <i>Mandrel diameter 20 mm no fissuring</i>	Conforme <i>Fulfilled</i>		
Resistenza alla lacerazione <i>Tear strength</i>	ISO 34-1 Procedura A, Metodo B <i>Procedure A, Method B</i>	Valore medio $\geq 20$ N/mm <i>Mean value <math>\geq 20</math> N/mm</i>	Conforme <i>Fulfilled</i>		-
Solidità dei colori alla luce artificiale <i>Color fastness to artificial light</i>	ISO 105-B02 Procedura 3 <i>Procedure 3</i>	Almeno 6 sulla scala del blu: $\geq$ livello 3 sulla scala del grigio (= 350 MJ/m <sup>2</sup> ) <i>At least level 6 on the blue scale;</i> $\geq$ livello 3 on the grey scale (= 350 MJ/m <sup>2</sup> )	Conforme <i>Fulfilled</i>		
Resistenza alla brace di sigaretta <i>Cigarette-burn resistance</i>	EN 1399 Procedura A - B <i>Procedure A - B</i>	Procedura A [espulso] $\geq$ livello 4 Procedura B [in fiamme] $\geq$ livello 3 Procedura A [stubbato] level $\geq 4$ Procedura B [burning] level $\geq 3$	Conforme <i>Fulfilled</i>		
Tossicità fumi <i>Smoke toxicity</i>	BS 6853 Ann. B.2	$\leq 5$ R	Conforme <i>Fulfilled</i>		
Classificazione <i>Classification</i>	UNI EN ISO 10874 (Ex. EN 685)	Abitazioni - Negozi - Industrie <i>Residential - Commercial - Industrial</i>	23/32/42	23/34/43	
Resistenza alla trasmissione del calore <i>Thermal conductivity</i>	DIN 52 612	-	0,022 m <sup>2</sup> K/W		0,03 m <sup>2</sup> K/W
Reazione alle sostanze chimiche <i>Effect of chemicals</i>	UNI EN ISO 26987 (Ex. EN 423)	-	Dipende dalla concentrazione e dal tempo d'azione <i>Resistant depending on concentration and time of exposure</i>		
Fattore di correzione del rumore da calpestio <i>Improvement in footfall sound absorption</i>	UNI EN ISO 10140-3 (Ex. ISO 140 - 8)	-	6 dB	12 dB	16 dB
Proprietà elettro-isolante <i>Electrical insulation properties</i>	IEC 60093	-	$> 10^{10}$ Ohm		
Carica elettrostatica da calpestio <i>Electrical propensity when walked upon</i>	EN 1815	-	Antistatico, carica elettrostatica in caso di soles in gomma $\leq 2$ KV <i>Antistatic - charging in case of rubber soles <math>\leq 2</math>KV</i>		
Effetto sedia a rotelle <i>Effect of a castor chair</i>	EN 425	-	Prova di rulli, tipoW, conformi alla norma EN 12529 <i>Suitable if castor wheels, typeW, according to EN 12529 are used</i>		
Resistenza allo scivolamento <i>Slip resistance</i>	EN 13 893	$\geq 0,30$ DS	DS		
Classe antincendio <i>Reaction to fire</i>	EN 13 501 - 1	-	Bfl - s1 Appoggiato o Incollato <i>Not bonded or Bonded</i>		Bfl - s1

I DATI TECNICI POSSONO ESSERE SOGGETTI A MODIFICHE SENZA PREAVVISO  
*TECHNICAL DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE*

EN 12 199 Pavimenti di gomma con rilievo omogenei ed eterogenei  
*EN 12 199 Specification for homogeneous and heterogeneous profiled rubber floor coverings*  
EN 1817 Pavimenti di gomma lisci omogenei ed eterogenei  
*EN 1817 Specification for homogeneous and heterogeneous smooth rubber floor coverings*

 500x500 | 1000x1000mm  2,5 mm  kg/m<sup>2</sup> 4,00

 500x500 | 1000x1000mm  3,5 mm  kg/m<sup>2</sup> 5,50



 500x500 | 1000x1000mm  3,5 mm  kg/m<sup>2</sup> 5,40



Disponibile in tutti i colori DOTFLOOR S.  
*Available in all colours of DOTFLOOR S.*

## Hammerlock Terrazzo

\* Pavimento in gomma autoposante con superficie martellata, multicolore, posa con adesivo removibile.  
*Loose-laying multicolored rubber tiles with hammered surface. Install with suitable peelable adhesive system.*

 500x500mm  5,0 mm  kg/m<sup>2</sup> 8,00



Available in all colours of **Hammer Terrazzo**



*Jaymart*



**Jaymart Rubber &  
Plastics Limited**  
**Roman Way, Crusader  
Park,**  
**Warminster**  
**BA12 8SP**

**Tel 01985 218994**  
**Email:**  
**[sales@jaymart.co.uk](mailto:sales@jaymart.co.uk)**  
**[www.jaymart.co.uk](http://www.jaymart.co.uk)**