









EXTERNAL THERMAL DOOR BLANK

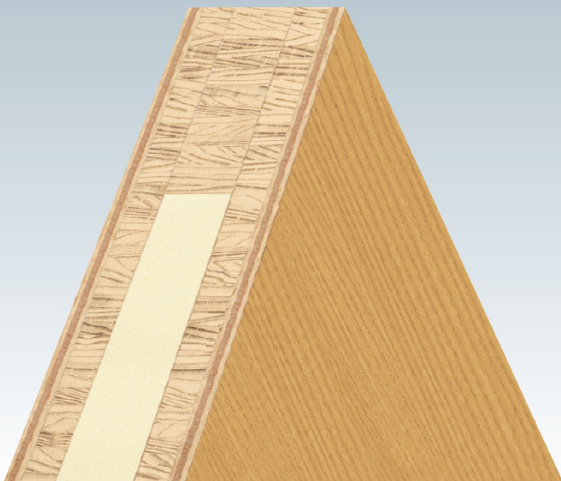

-  U-value: 0,89 W/m² K
Thermal door
-  Easy to process: routing and edging
-  5 mm ply veneer faces (Anegré face)
-  High security performance

LAMINESSE Klima PU Thickness: 56 mm – Max. sizes: 2.470 x 1.150 mm

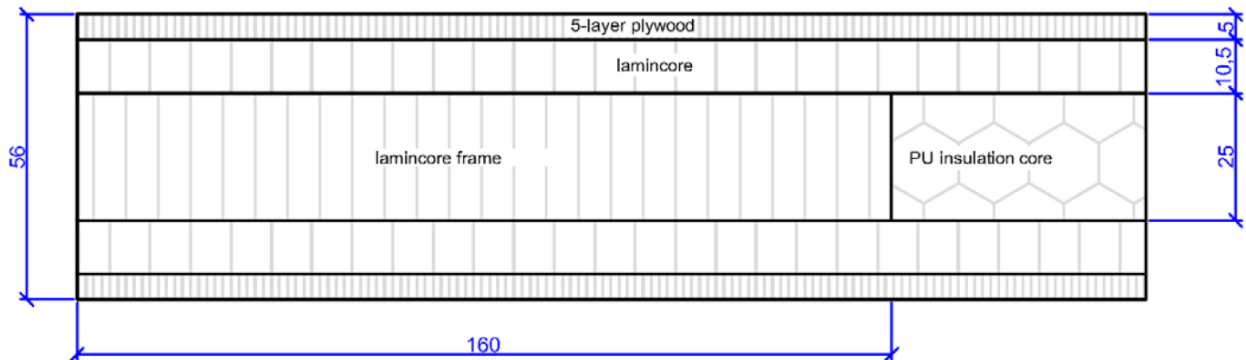

technical details	
U-value [W/m ² K]	0,89
Weight kg/pce	approx 36 kg/pce
Max. dimensions	2.470 x 1.150 x 56 mm
Processing details	160 mm wide Lamincore stiles