


EXTERNAL THERMAL DOOR BLANK



-  Easy to process: routing and edging
-  5 mm ply veneer faces (Anegré face)
-  High security performance
-  100 % solid timber Thermal door




LAMINESSE Klima

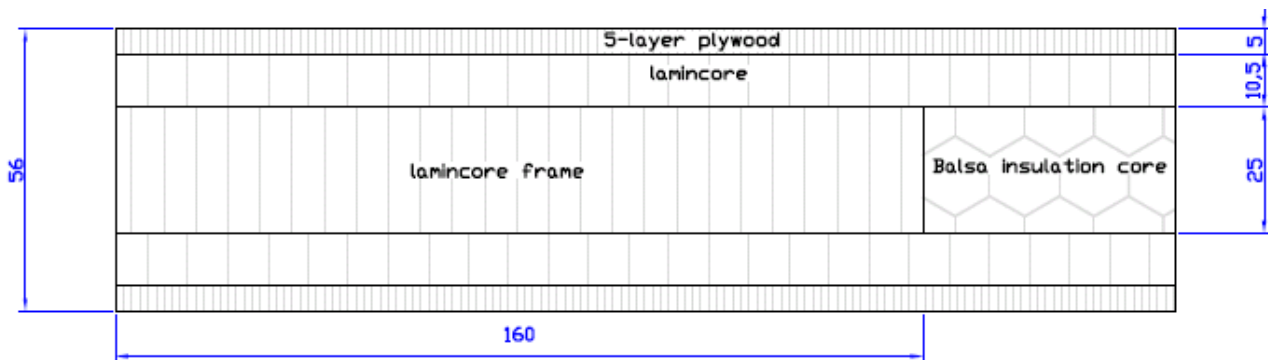

Technical details	
U-value [W / Km ²]	1,27
Weight kg/pce (2.135 x 915 mm)	approx 40 kg/pce
Max. dimensions	2.470 x 1.220 x 56 mm
Processing details	160 mm wide Lamincore stiles