R32 Multi Split

MXM-M/N

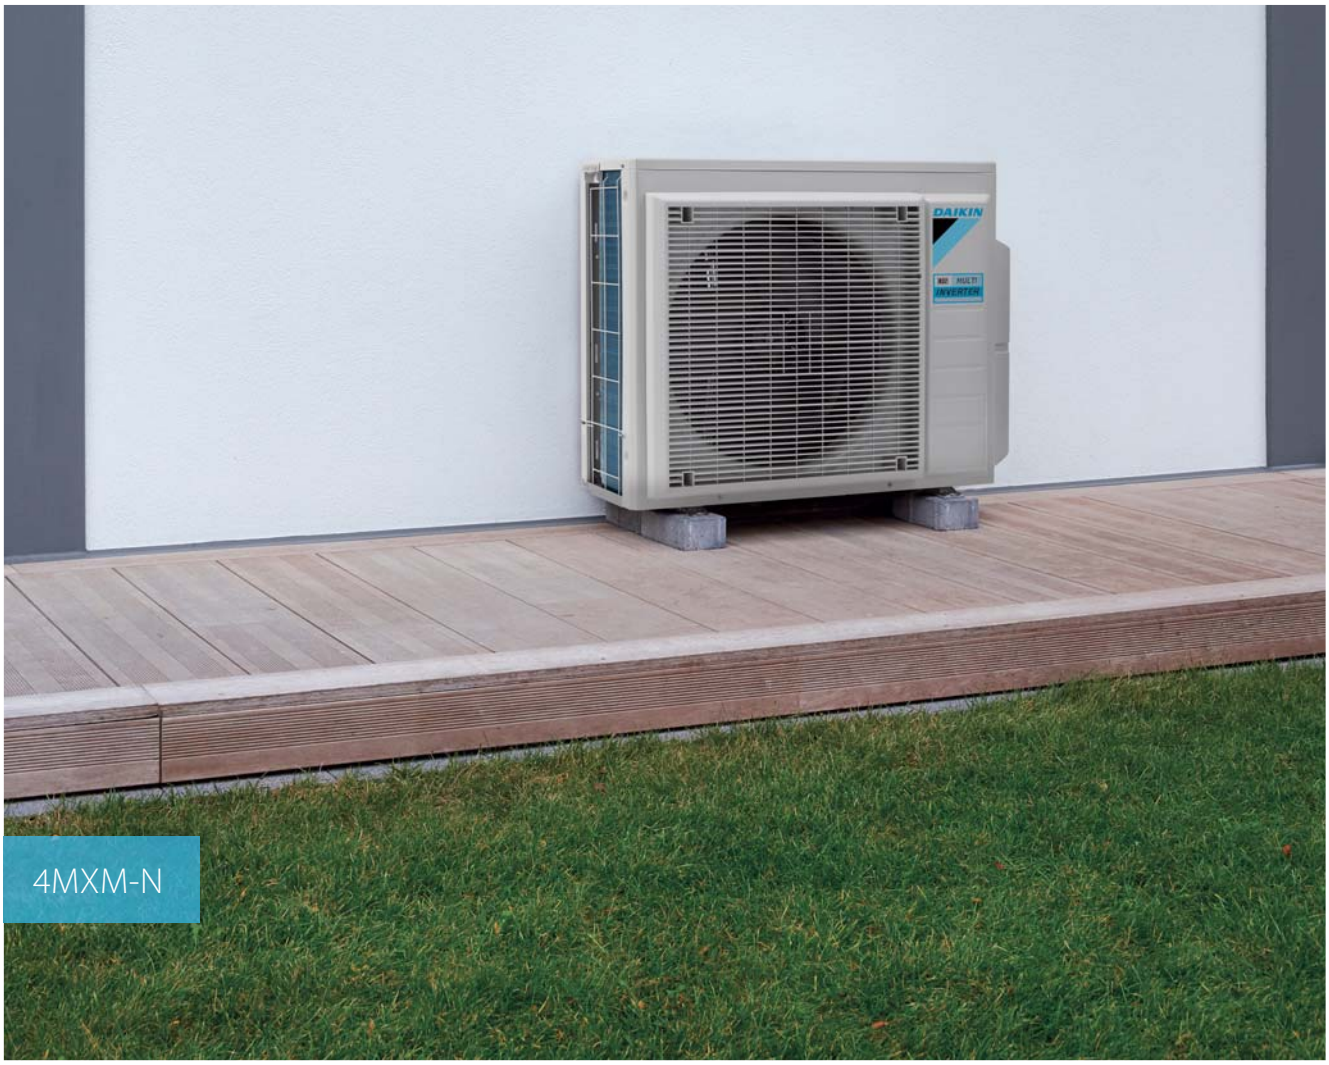

4MXM-N

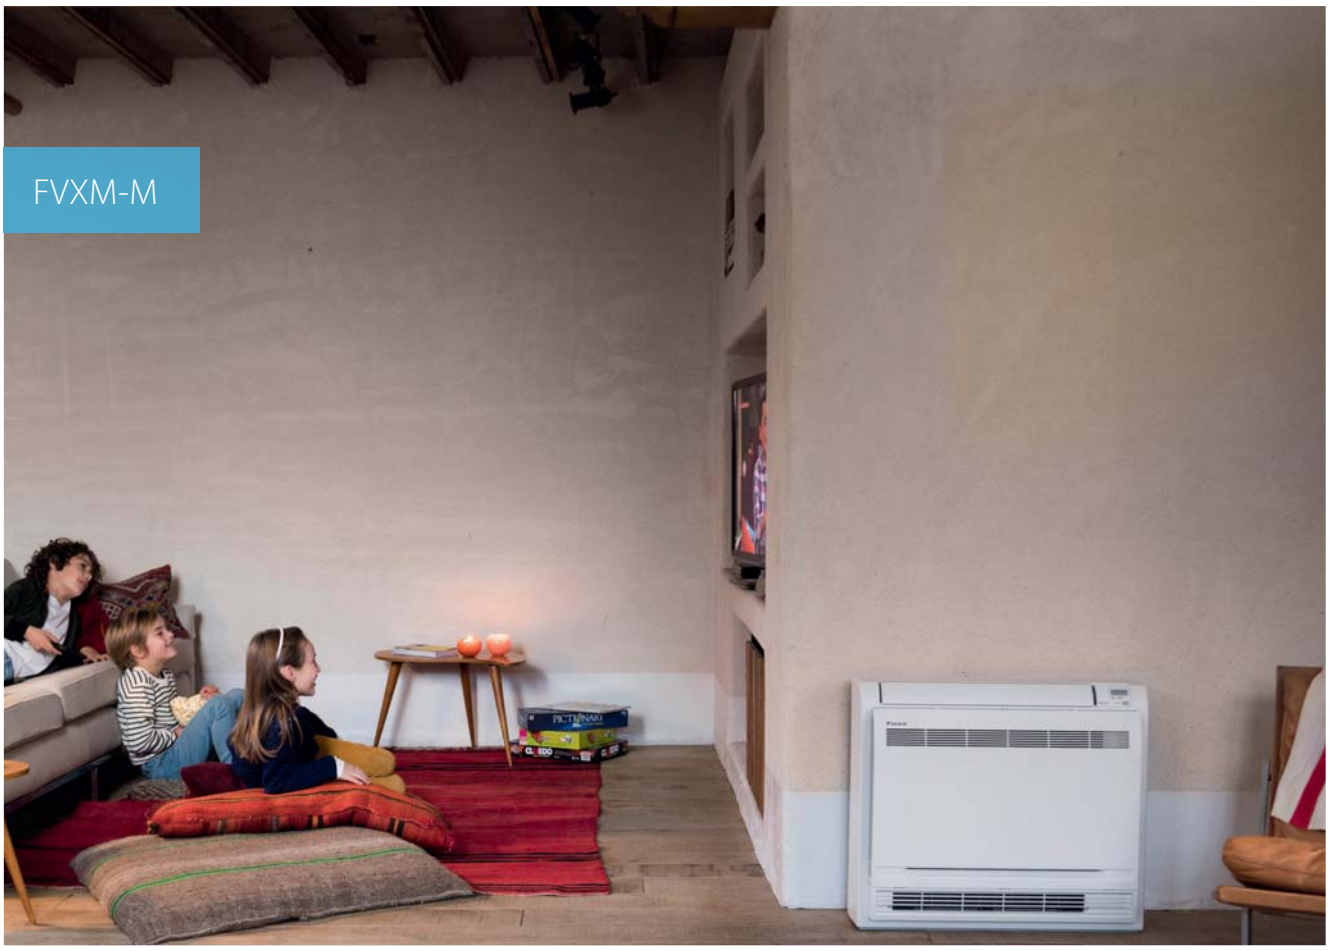

FVXM-M

Contents

Multi series	2
Meet the range	3
Daikin Altherma hybrid + multi	4
Combination tables	5
2MXM40M	5
2MXM50M9	6
3MXM40N	7
3MXM52N	8
3MXM68N	10
4MXM68N	12
4MXM80N	16
5MXM90N	24

Multi Series

Multi Series R32 Inverters offer the ability to connect up to five fan coils to one outdoor unit.

With the MXM range it is possible to install indoor units throughout a house or small commercial premises and only use one outdoor unit.

All the indoor units can be individually controlled and do not need to be installed in the same room or even at the same time.

A multi outdoor unit not only allows you to connect up to five indoor units, it also saves you precious space on your balcony, terrace, wall or garden, as you only need one outdoor unit for all your cooling and heating requirements.

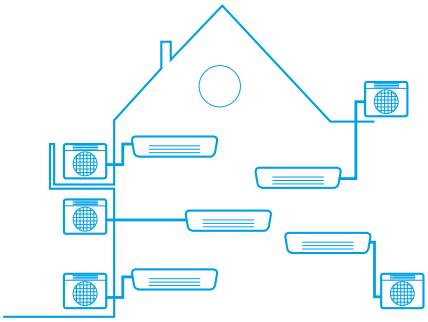

pair application

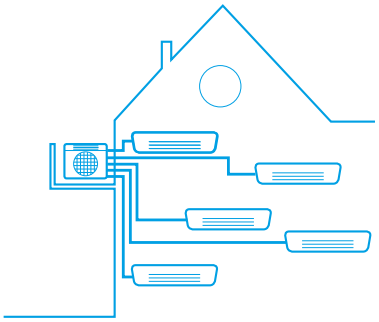

multi application

Meet the range

Outdoor Units			2MXM40M	2MXM50M9	3MXM40N	3MXM52N	3MXM68N	4MXM68N	4MXM80N	5MXM90N
Capacity	Nominal Cooling	kW	4.0	5.0	4.0	5.2	6.8	6.8	8.0	9.0
	Nominal Heating	kW	4.4	5.7	4.6	6.8	8.6	8.6	9.6	10.4
Dimensions	Height x Width x Depth	mm	550 x 765 x 285	550 x 765 x 285	734 x 958 x 340	734 x 958 x 340	734 x 958 x 340	734 x 958 x 340	734 x 958 x 340	734 x 958 x 340
Weight		kg	36	41	57	57	62	63	67	68
Electrical Details	Power Supply	Phase	1ph	1ph	1ph	1ph	1ph	1ph	1ph	1ph
		Hz	50	50	50	50	50	50	50	50
		V	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
	Running Current	amps	Refer to Multi Combination Tables							
	Starting Current	amps	4.6	6.3	4.1	4.6	9.8	8.3	11.2	11.8
	Fuse Rating	amps	16	16	30	30	30	30	30	30
Refrigerant Circuit	Refrigerant Type		R32	R32	R32	R32	R32	R32	R32	R32
	Refrigerant Charge	kg	0.88	1.15	1.80	1.80	2.00	2.00	2.40	2.40
Sound Pressure (Cooling)	Nom	dBA	48	46	46	46	48	48	49	52
Sound Power (Cooling)			60	60	59	59	61	61	61	64
Piping Limits	Max. Length (OU- IU)	m	20	20	25	25	25	25	25	25
	Max. Level Difference (IU- IU)	m	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5
	Max. Level Difference (IU- OU)	m	15	15	15	15	15	15	15	15
	Total piping length (Actual)	m	30	30	50	50	50	60	70	75
Piping Connections	Liquid	inches (mm)	2x 1/4 (6.4)	2x 1/4 (6.4)	3x 1/4 (6.4)	3x 1/4 (6.4)	3x 1/4 (6.4)	4x 1/4 (6.4)	4x 1/4 (6.4)	5x 1/4 (6.4)
	Gas	inches (mm)	2x 3/8 (9.5)	3/8 (9.5)	1x 3/8 (9.5)	1x 3/8 (9.5)	1x 3/8 (9.5)	2x 3/8 (9.5)	3/8 (9.5)	2x 3.8 (9.5)
					2x 1/2 (12.7)	2x 1/2 (12.7)	2x 1/2 (12.7)	2x 1/2 (12.7)	1/2 (12.7)	1x 1/2 (12.7)
										2x 5/8 (15.9)
Operating range (Cooling)	Min / Max	°CDB	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46	-10 / 46
Operating range (Cooling)	Min / Max	°CWB	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18	-15 / 18
Number of Connected Indoor Units			2	2	3	3	3	4	4	5
Air Flow Rate (Cooling)	Nom	m^3/sec	0.550	0.566	0.700	0.700	0.708	0.708	0.753	0.818

Our multi split condenser can be used in combination with a variety of indoor units as detailed in the table below:

Connectable Indoor Units	Wall mounted																				Floor standing			Roundflow cassette			Fully flat cassette				Concealed ceiling								Ceiling suspended			Concealed floor standing			
	FTXJ-M				FTXA-A(W/S/K)						FTXM-M							FTXP-L			FVXM-F			FCAG-A			FFA-A				FDXM-F3				FBA-A				FHA-A			FNA-A			
	20	25	35	50	15	20	25	35	42	50	20	25	35	42	50	60	71	20	25	35	25	35	50	35	50	60	25	35	50	60	25	35	50	60	25	35	50	60	35	50	60	25	35	50	60
2MXM40M	●	●	●		●	●	●	●			●	●	●					●	●	●	●	●									●	●											●	●		
2MXM50M9	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●				●	●	●		●	●	●										●	●	●	
3MXM40N	●	●	●		●	●	●	●			●	●	●								●	●		●			●	●			●	●			●	●			●			●	●		
3MXM52N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●						●	●	●	●	●		●	●	●		●	●	●		●	●	●		●	●	●	●	●	●	
3MXM68N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
4MXM68N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
4MXM80N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
5MXM90N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Wall mounted units	Cassettes & Ceiling mounted	Ducted	Floor
Stylish (FTXA-AW/S/T)	Roundflow (FCAG-A)	Slim Duct (FDXM-F3)	Concealed Floor Standing (FNA-A)
Emura (FTXJ-MW/S)	600x600 Fully Flat (FFA-A)	Standard Duct (FBA-A)	Floor Standing Cased (FVXM-M)
Standard Inverter (FTXM-M)	Ceiling Suspended (FHA-A)		
Low Inverter (FTXP-L)			

Daikin Altherma hybrid heat pump
+ multi

The Daikin Altherma hybrid heat pump can also be combined with an air-to-air multi system to provide optimal cooling. Easily installed and managed via an app on a smartphone or tablet, the Daikin Altherma hybrid heat pump + multi is an all-in-one system for heating, cooling and hot water purposes.

Multi features

- Equipped with Bluevolution technology
- 3, 4 and 5 ports for multi outdoor units
- Combinable with different Split & Sky Air indoor units:
  One port can be used for hot water production

Control with Daikin Online Controller app

BLUEVOLUTION

	Hybrid heat pump		Wall mounted																			Concealed ceiling								Floor standing			Round flow cassette			Fully flat cassette				Ceiling suspended			Concealed floor standing			
	CHYHBH-AV32		C/FTXA-AW/S/T						FTXJ-MW/S				CTXM-M	FTXM-M								FDXM-F3				FBA-A				FVXM-F			FCAG-A			FFA-A				FHA-A			FNA-A			
Connectable Indoor Units	05	08	15	20	25	35	42	50	20	25	35	50	15	20	25	35	42	50	60	71	25	35	50	60	25	35	50	60	25	35	50	35	50	60	25	35	50	60	35	50	60	25	35	50	60
3MXM52N	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			●	●	●		●	●	●		●	●	●	●	●		●	●	●		●	●		●	●	●	
3MXM68N	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
4MXM68N	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
4MXM80N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
5MXM90N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

2MXM40M

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)		Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
2MXM40M3V1B	1.5	1.50	---	1.30	1.50	2.00	0.33	0.31	0.40	1.78	1.70	2.17	79	---	---	---	---	---	---	---
	2.0	2.00	---	1.30	2.00	2.40	0.33	0.44	0.57	1.78	2.38	3.09	79	---	---	---	---	---	---	---
	2.5	2.50	---	1.30	2.50	3.00	0.33	0.61	0.80	1.78	3.33	4.40	79	---	---	---	---	---	---	---
	3.5	3.50	---	1.30	3.50	4.00	0.33	1.04	1.35	1.78	5.71	7.38	79	---	---	---	---	---	---	---
	1.5+1.5	1.50	1.50	1.50	3.00	3.60	0.31	0.60	0.73	1.67	3.33	4.00	79	4.97	A	302	A+++	8.66	3.00	122
	1.5+2.0	1.50	2.00	1.50	3.50	4.00	0.31	0.79	0.91	1.67	4.35	4.98	79	4.43	A	396	A+++	8.60	3.50	143
	1.5+2.5	1.50	2.50	1.50	4.00	4.20	0.31	0.98	1.03	1.67	5.37	5.64	79	4.10	A	488	A+++	8.55	4.00	164
	1.5+3.5	1.20	2.80	1.50	4.00	4.40	0.31	0.96	1.06	1.67	5.30	5.83	79	4.16	A	481	A++	8.26	4.00	170
	2.0+2.0	2.00	2.00	1.50	4.00	4.20	0.31	0.97	1.02	1.67	5.34	5.61	79	4.13	A	486	A+++	8.53	4.00	165
	2.0+2.5	1.78	2.22	1.50	4.00	4.30	0.31	0.96	1.04	1.67	5.30	5.70	79	4.16	A	481	A+++	8.50	4.00	165
	2.0+3.5	1.45	2.55	1.50	4.00	4.50	0.31	0.95	1.08	1.67	5.25	5.91	79	4.20	A	477	A++	8.19	4.00	171
	2.5+2.5	2.00	2.00	1.50	4.00	4.40	0.31	0.96	1.06	1.67	5.27	5.80	79	4.18	A	479	A++	8.36	4.00	168
	2.5+3.5	1.67	2.33	1.50	4.00	4.60	0.31	0.94	1.09	1.67	5.20	5.98	79	4.24	A	472	A++	8.11	4.00	173

Heating

Outdoor unit	Indoor unit	Heating capacity (kW)		Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	Energy label	Seasonal data				
		A room	B room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				Label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
2MXM40M3V1B	1.5	2.00	---	1.00	2.00	3.30	0.26	0.68	1.04	1.43	3.66	5.69	79	---	---	---	---	---	---	---
	2.0	3.00	---	1.00	3.00	3.70	0.26	0.83	1.24	1.43	4.52	6.78	79	---	---	---	---	---	---	---
	2.5	3.40	---	1.00	3.40	4.10	0.26	1.02	1.48	1.43	5.59	8.09	79	---	---	---	---	---	---	---
	3.5	3.80	---	1.00	3.80	4.40	0.26	1.28	1.71	1.43	7.02	9.40	79	---	---	---	---	---	---	---
	1.5+1.5	1.75	1.75	1.20	3.50	4.30	0.24	0.80	0.99	1.31	4.43	5.45	79	4.35	A	A++	4.62	3.00	908	0.50
	1.5+2.0	1.63	2.17	1.20	3.80	4.50	0.24	0.88	1.04	1.31	4.85	5.75	79	4.32	A	A++	4.61	3.20	972	0.70
	1.5+2.5	1.58	2.63	1.20	4.20	4.60	0.24	1.00	1.10	1.31	5.53	6.06	79	4.18	A	A++	4.60	3.20	972	0.60
	1.5+3.5	1.26	2.94	1.20	4.20	4.70	0.24	0.96	1.12	1.31	5.29	5.92	79	4.37	A	A++	4.63	3.20	968	0.50
	2.0+2.0	2.10	2.10	1.30	4.20	4.60	0.24	0.98	1.08	1.31	5.41	5.93	79	4.28	A	A++	4.64	3.20	966	0.60
	2.0+2.5	1.87	2.33	1.30	4.20	4.70	0.24	0.97	1.09	1.31	5.36	6.00	79	4.32	A	A++	4.60	3.20	973	0.50
	2.0+3.5	1.53	2.67	1.30	4.20	4.80	0.24	0.95	1.09	1.31	5.25	6.00	79	4.41	A	A++	4.60	3.20	974	0.40
	2.5+2.5	2.10	2.10	1.30	4.20	4.70	0.24	0.96	1.08	1.31	5.29	5.92	79	4.37	A	A++	4.60	3.20	974	0.50
	2.5+3.5	1.75	2.45	1.30	4.20	4.80	0.24	0.94	1.08	1.31	5.19	5.94	79	4.46	A	A++	4.61	3.20	971	0.40

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)		Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
2MXM50M2V1B9	1.5	1.50	---	1.40	1.50	2.20	0.31	0.32	0.52	1.53	1.55	2.53	89	---	---	---	---	---	---	---
	2.0	2.00	---	1.40	2.00	2.60	0.31	0.47	0.69	1.53	2.25	3.37	89	---	---	---	---	---	---	---
	2.5	2.50	---	1.40	2.50	3.10	0.31	0.67	0.92	1.53	3.27	4.50	89	---	---	---	---	---	---	---
	3.5	3.50	---	1.40	3.50	4.00	0.31	1.09	1.42	1.53	5.32	6.95	89	---	---	---	---	---	---	---
	4.2	4.20	---	1.40	4.20	4.70	0.31	1.59	1.75	1.53	7.73	8.57	89	---	---	---	---	---	---	---
	5.0	5.00	---	1.60	5.00	5.30	0.33	1.30	1.44	1.64	6.33	7.01	89	---	---	---	---	---	---	---
	1.5+1.5	1.50	1.50	1.60	3.00	3.20	0.33	0.62	0.66	1.64	3.03	3.24	89	4.84	A	310	A+++	8.80	3.00	120
	1.5+2.0	1.50	2.00	1.60	3.50	3.70	0.33	0.76	0.80	1.64	3.71	3.93	89	4.61	A	380	A+++	8.74	3.50	141
	1.5+2.5	1.50	2.50	1.60	4.00	4.20	0.33	0.94	0.99	1.64	4.60	4.83	89	4.25	A	471	A+++	8.64	4.00	162
	1.5+3.5	1.50	3.50	1.60	5.00	5.00	0.33	1.25	1.25	1.64	6.10	6.10	89	4.01	A	624	A+++	8.52	5.00	206
	1.5+4.2	1.32	3.68	1.60	5.00	5.40	0.33	1.23	1.54	1.64	6.04	6.53	89	4.05	A	618	A+++	8.55	5.00	205
	1.5+5.0	1.15	3.85	1.80	5.00	5.50	0.33	1.23	1.68	1.64	5.99	6.59	89	4.08	A	613	A+++	8.50	5.00	206
	2.0+2.0	2.00	2.00	1.80	4.00	5.00	0.33	0.94	1.28	1.64	4.60	5.75	89	4.25	A	471	A+++	8.71	4.00	161
	2.0+2.5	2.00	2.50	1.80	4.50	5.10	0.33	1.07	1.31	1.64	5.23	5.93	89	4.21	A	535	A+++	8.67	4.50	182
	2.0+3.5	1.82	3.18	1.80	5.00	5.40	0.33	1.24	1.49	1.64	6.05	6.54	89	4.04	A	619	A+++	8.54	5.00	205
	2.0+4.2	1.61	3.39	1.80	5.00	5.50	0.33	1.23	1.51	1.64	6.01	6.62	89	4.07	A	615	A+++	8.54	5.00	205
	2.0+5.0	1.43	3.57	1.80	5.00	5.50	0.33	1.22	1.44	1.64	5.95	6.55	89	4.11	A	609	A+++	8.51	5.00	208
	2.5+2.5	2.50	2.50	1.80	5.00	5.30	0.33	1.25	1.42	1.64	6.10	6.47	89	4.01	A	624	A+++	8.53	5.00	205
	2.5+3.5	2.08	2.92	1.80	5.00	5.40	0.33	1.23	1.43	1.64	6.02	6.51	89	4.06	A	616	A+++	8.56	5.00	205
	2.5+4.2	1.87	3.13	1.80	5.00	5.50	0.33	1.22	1.45	1.64	5.98	6.58	89	4.09	A	612	A+++	8.57	5.00	204
	2.5+5.0	1.67	3.33	1.80	5.00	5.50	0.33	1.21	1.38	1.64	5.92	6.52	89	4.13	A	606	A+++	8.52	5.00	206
	3.5+3.5	2.50	2.50	1.80	5.00	5.40	0.33	1.22	1.42	1.64	5.95	6.43	89	4.11	A	609	A+++	8.57	5.00	205
	3.5+4.2	2.27	2.73	1.80	5.00	5.50	0.33	1.21	1.40	1.64	5.90	6.49	89	4.14	A	604	A+++	8.60	5.00	204
	3.5+5.0	2.06	2.94	1.80	5.00	5.50	0.33	1.20	1.34	1.64	5.85	6.44	89	4.18	A	599	A+++	8.52	5.00	206
	4.2+4.2	2.50	2.50	1.80	5.00	5.50	0.33	1.20	1.38	1.64	5.88	6.47	89	4.16	A	601	A+++	8.56	5.00	205

Heating

Outdoor unit	Indoor unit	Heating capacity (kW)		Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	Energy label	Seasonal data				
		A room	B room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				Label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
2MXM50M2V1B9	1.5	2.00	---	1.10	2.00	3.30	0.29	0.68	0.95	1.44	3.31	4.66	89	---	---	---	---	---	---	---
	2.0	3.00	---	1.10	3.00	3.70	0.27	0.82	1.13	1.33	3.99	5.52	89	---	---	---	---	---	---	---
	2.5	3.40	---	1.10	3.40	4.10	0.25	0.99	1.34	1.23	4.81	6.54	89	---	---	---	---	---	---	---
	3.5	4.00	---	1.10	4.00	4.60	0.25	1.24	1.53	1.23	6.03	7.46	89	---	---	---	---	---	---	---
	4.2	4.60	---	1.10	4.60	5.00	0.23	1.49	1.81	1.12	7.27	8.85	89	---	---	---	---	---	---	---
	5.0	5.50	---	1.20	5.50	5.60	0.23	1.35	1.51	1.12	6.56	9.01	89	---	---	---	---	---	---	---
	1.5+1.5	2.00	2.00	1.20	4.00	4.54	0.23	0.87	0.99	1.12	4.27	4.85	89	4.58	A	A++	4.79	3.30	965	0.50
	1.5+2.0	1.89	2.51	1.20	4.40	4.89	0.23	1.02	1.13	1.12	4.97	5.53	89	4.33	A	A++	4.66	3.80	1140	0.80
	1.5+2.5	1.80	3.00	1.20	4.80	5.19	0.23	1.18	1.27	1.12	5.75	6.22	89	4.08	A	A++	4.64	3.80	1146	0.60
	1.5+3.5	1.56	3.64	1.20	5.20	5.70	0.25	1.28	1.40	1.23	6.25	6.86	89	4.07	A	A++	4.61	4.00	1214	0.60
	1.5+4.2	1.47	4.13	1.20	5.60	5.96	0.25	1.37	1.46	1.23	6.71	7.15	89	4.08	A	A++	4.62	4.10	1241	0.70
	1.5+5.0	1.29	4.31	1.20	5.60	6.16	0.25	1.37	1.50	1.23	6.68	7.35	89	4.10	A	A++	4.63	4.20	1269	0.80
	2.0+2.0	2.60	2.60	1.20	5.20	5.70	0.23	1.27	1.40	1.12	6.22	6.82	89	4.09	A	A++	4.61	4.00	1214	0.60
	2.0+2.5	2.49	3.11	1.20	5.60	5.80	0.23	1.37	1.42	1.12	6.68	6.92	89	4.10	A	A++	4.61	4.10	1244	0.70
	2.0+3.5	2.04	3.56	1.20	5.60	5.90	0.25	1.36	1.43	1.23	6.65	7.01	89	4.12	A	A++	4.61	4.20	1275	0.80
	2.0+4.2	1.81	3.79	1.20	5.60	6.00	0.25	1.36	1.46	1.23	6.63	7.11	89	4.13	A	A++	4.63	4.20	1268	0.80
	2.0+5.0	1.60	4.00	1.20	5.60	6.20	0.25	1.35	1.50	1.23	6.60	7.31	89	4.15	A	A++	4.68	4.20	1255	0.80
	2.5+2.5	2.80	2.80	1.20	5.60	5.80	0.23	1.37	1.42	1.12	6.71	6.95	89	4.08	A	A++	4.61	4.20	1275	0.80
	2.5+3.5	2.33	3.27	1.20	5.60	6.00	0.25	1.38	1.48	1.23	6.76	7.25	89	4.05	A	A++	4.62	4.20	1272	0.80
	2.5+4.2	2.09	3.51	1.20	5.60	6.10	0.25	1.39	1.51	1.23	6.79	7.40	89	4.03	A	A++	4.65	4.20	1265	0.80
	2.5+5.0	1.87	3.73	1.30	5.60	6.30	0.25	1.41	1.58	1.23	6.88	7.74	89	3.98	A	A++	4.71	4.20	1249	0.80
	3.5+3.5	2.80	2.80	1.30	5.60	6.10	0.25	1.40	1.52	1.23	6.83	7.44	89	4.01	A	A++	4.66	4.20	1262	0.80
	3.5+4.2	2.55	3.05	1.30	5.60	6.20	0.25	1.40	1.55	1.23	6.84	7.58	89	4.00	A	A++	4.67	4.20	1258	0.80
	3.5+5.0	2.31	3.29	1.30	5.60	6.40	0.25	1.42	1.63	1.23	6.95	7.95	89	3.94	A	A++	4.75	4.20	1238	0.80
	4.2+4.2	2.80	2.80	1.30	5.60	6.30	0.25	1.41	1.58	1.23	6.88	7.74	89	3.98	A	A++	4.70	4.20	1251	0.80

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)			Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
3MXM40N2V1B	1.50	1.50	---	---	1.40	1.50	2.20	0.32	0.35	0.46	1.52	1.63	2.2	91	---	---	---	---	---	---	---
	2.00	2.00	---	---	1.40	2.00	2.90	0.32	0.48	0.71	1.52	2.28	3.4	91	---	---	---	---	---	---	---
	2.50	2.50	---	---	1.40	2.50	3.10	0.32	0.64	0.82	1.52	3.05	3.9	91	---	---	---	---	---	---	---
	3.50	3.50	---	---	1.40	3.50	4.10	0.32	0.98	1.19	1.52	4.68	5.7	91	---	---	---	---	---	---	---
	1.5+1.5	1.50	1.50	---	1.60	3.00	4.20	0.34	0.59	1.14	1.63	2.82	5.44	91	5.12	A	293	A+++	8.64	3.00	122
	1.5+2.0	1.50	2.00	---	1.60	3.50	4.20	0.34	0.71	1.12	1.63	3.40	5.33	91	4.96	A	353	A+++	8.59	3.50	143
	1.5+2.5	1.50	2.50	---	1.60	4.00	4.20	0.34	0.86	1.10	1.63	4.11	5.33	91	4.68	A	427	A+++	8.51	4.00	164
	1.5+3.5	1.20	2.80	---	1.60	4.00	4.20	0.34	0.85	1.08	1.63	4.07	5.33	91	4.72	A	424	A+++	8.50	4.00	165
	2.0+2.0	2.00	2.00	---	1.60	4.00	4.50	0.34	0.84	1.09	1.63	4.02	5.22	91	4.76	A	420	A+++	8.52	4.00	165
	2.0+2.5	1.78	2.22	---	1.60	4.00	4.50	0.34	0.83	1.07	1.63	3.97	5.22	91	4.82	A	415	A+++	8.52	4.00	165
	2.0+3.5	1.45	2.55	---	1.60	4.00	4.50	0.34	0.83	1.03	1.63	3.97	5.22	91	4.86	A	412	A+++	8.50	4.00	165
	2.5+2.5	2.00	2.00	---	1.60	4.00	4.50	0.34	0.83	1.05	1.63	3.97	5.22	91	4.84	A	413	A+++	8.51	4.00	165
	2.5+3.5	1.67	2.33	---	1.60	4.00	4.50	0.34	0.82	1.01	1.63	3.92	5.22	91	4.88	A	410	A+++	8.50	4.00	165
	3.5+3.5	2.00	2.00	---	1.60	4.00	4.50	0.34	0.82	0.99	1.63	3.92	5.11	91	4.92	A	407	A+++	8.50	4.00	165
	1.5+1.5+1.5	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.78	0.98	1.74	3.73	4.68	91	5.18	A	386	A+++	8.55	4.00	164
	1.5+1.5+2.0	1.20	1.20	1.60	1.70	4.00	4.60	0.36	0.77	0.96	1.74	3.68	4.68	91	5.20	A	385	A+++	8.55	4.00	164
	1.5+1.5+2.5	1.09	1.09	1.82	1.70	4.00	4.60	0.36	0.77	0.94	1.74	3.68	4.68	91	5.22	A	383	A+++	8.54	4.00	164
	1.5+1.5+3.5	0.92	0.92	2.15	1.70	4.00	4.60	0.36	0.76	0.90	1.74	3.64	4.68	91	5.26	A	380	A+++	8.53	4.00	165
	1.5+2.0+2.0	1.09	1.45	1.45	1.70	4.00	4.60	0.36	0.77	0.92	1.74	3.68	4.68	91	5.25	A	381	A+++	8.53	4.00	164
	1.5+2.0+2.5	1.00	1.33	1.67	1.70	4.00	4.60	0.36	0.76	0.91	1.74	3.64	4.68	91	5.29	A	378	A+++	8.54	4.00	164
	1.5+2.0+3.5	0.86	1.14	2.00	1.70	4.00	4.60	0.36	0.76	0.89	1.74	3.64	4.68	91	5.31	A	377	A+++	8.53	4.00	165
	1.5+2.5+2.5	0.92	1.54	1.54	1.70	4.00	4.60	0.36	0.76	0.87	1.74	3.64	4.68	91	5.27	A	380	A+++	8.53	4.00	165
	2.0+2.0+2.0	1.33	1.33	1.33	1.70	4.00	4.60	0.36	0.76	0.85	1.74	3.64	4.68	91	5.30	A	3.77	A+++	8.52	4.00	214
	2.0+2.0+2.5	1.23	1.23	1.54	1.70	4.00	4.60	0.36	0.76	0.83	1.74	3.64	4.68	91	5.32	A	376	A+++	8.51	4.00	165
	2.0+2.5+2.5	1.14	1.43	1.43	1.70	4.00	4.60	0.36	0.75	0.81	1.74	3.59	4.68	91	5.35	A	374	A+++	8.50	4.00	165

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)			Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	C room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
3MXM40N2V1B	1.50	2.30	---	---	1.10	2.30	3.30	0.30	0.60	0.82	1.38	2.77	3.83	93	---	---	---	---	---	---	---
	2.00	2.70	---	---	1.10	2.70	3.70	0.30	0.76	1.23	1.38	3.51	5.75	93	---	---	---	---	---	---	---
	2.50	3.40	---	---	1.10	3.40	4.10	0.30	1.01	1.28	1.38	4.68	5.96	93	---	---	---	---	---	---	---
	3.50	4.20	---	---	1.10	4.20	4.80	0.30	1.42	1.71	1.38	6.60	7.98	93	---	---	---	---	---	---	---
	1.5+1.5	1.80	1.80	---	1.20	3.60	5.00	0.32	0.69	1.30	1.49	3.23	6.07	93	5.25	A	A++	4.60	3.60	1096	0.50
	1.5+2.0	1.54	2.06	---	1.20	3.60	5.00	0.32	0.69	1.28	1.49	3.23	5.96	93	5.29	A	A++	4.62	3.60	1091	0.50
	1.5+2.5	1.50	2.50	---	1.20	4.00	5.00	0.32	0.86	1.26	1.49	4.03	5.96	93	4.68	A	A+	4.39	4.20	1338	0.70
	1.5+3.5	1.38	3.22	---	1.20	4.60	5.00	0.32	0.98	1.22	1.49	4.59	5.96	93	4.72	A	A+	4.28	4.80	1570	0.80
	2.0+2.0	2.30	2.30	---	1.20	4.60	5.00	0.32	0.97	1.25	1.49	4.54	5.85	93	4.76	A	A+	4.24	4.80	1582	0.90
	2.0+2.5	2.04	2.56	---	1.20	4.60	5.00	0.32	0.98	1.23	1.49	4.59	5.85	93	4.72	A	A+	4.27	4.80	1572	0.90
	2.0+3.5	1.67	2.93	---	1.20	4.60	5.00	0.32	0.97	1.19	1.49	4.54	5.85	93	4.76	A	A+	4.30	4.80	1560	0.80
	2.5+2.5	2.30	2.30	---	1.20	4.60	5.00	0.32	0.96	1.21	1.49	4.49	5.85	93	4.84	A	A+	4.34	4.80	1548	0.90
	2.5+3.5	1.92	2.68	---	1.20	4.60	5.00	0.32	0.95	1.17	1.49	4.45	5.85	93	4.88	A	A+	4.37	4.80	1537	0.80
	3.5+3.5	2.30	2.30	---	1.20	4.60	5.00	0.32	0.94	1.15	1.49	4.40	5.75	93	4.92	A	A+	4.38	5.00	1598	0.90
	1.5+1.5+1.5	1.53	1.53	1.53	1.30	4.60	5.10	0.32	0.89	1.02	1.49	4.17	4.79	93	5.18	A	A++	4.65	5.00	1505	0.90
	1.5+1.5+2.0	1.38	1.38	1.84	1.30	4.60	5.10	0.32	0.89	1.01	1.49	4.17	4.72	93	5.2	A	A++	4.63	5.00	1511	0.90
	1.5+1.5+2.5	1.25	1.25	2.09	1.30	4.60	5.10	0.32	0.89	0.99	1.49	4.17	4.63	93	5.22	A	A++	4.61	5.00	1517	0.90
	1.5+1.5+3.5	1.06	1.06	2.48	1.30	4.60	5.10	0.32	0.88	0.97	1.49	4.12	4.53	93	5.26	A	A++	4.61	5.00	1518	0.90
	1.5+2.0+2.0	1.25	1.67	1.67	1.30	4.60	5.10	0.32	0.88	0.95	1.49	4.12	4.44	93	5.25	A	A++	4.60	5.00	1520	0.90
	1.5+2.0+2.5	1.15	1.53	1.92	1.30	4.60	5.10	0.32	0.87	0.93	1.49	4.07	4.35	93	5.29	A	A++	4.60	5.00	1521	0.90
	1.5+2.0+3.5	0.99	1.31	2.30	1.30	4.60	5.10	0.32	0.87	0.91	1.49	4.07	4.25	93	5.31	A	A++	4.62	5.00	1515	0.90
	1.5+2.5+2.5	1.06	1.77	1.77	1.30	4.60	5.10	0.32	0.88	0.87	1.49	4.12	4.07	93	5.27	A	A++	4.62	5.00	1513	0.90
	2.0+2.0+2.0	1.53	1.53	1.53	1.30	4.60	5.10	0.32	0.87	0.89	1.49	4.07	4.16	93	5.3	A	A++	4.60	5.00	1521	0.90
	2.0+2.0+2.5	1.42	1.42	1.77	1.30	4.60	5.10	0.32	0.87	0.86	1.49	4.07	4.02	93	5.32	A	A++	4.62	5.00	1515	0.90
	2.0+2.5+2.5	1.31	1.64	1.64	1.30	4.60	5.10	0.32	0.86	0.84	1.49	4.03	3.93	93	5.35	A	A++	4.63	5.00	1512	0.90

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)			Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room		Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
3MXM52N2V1B	1.5	1.50	---	---	1.40	1.50	2.40	0.34	0.36	0.63	1.50	1.62	2.86	96	---	---	---	---	---	---	---
	2.0	2.00	---	---	1.60	2.00	3.00	0.36	0.48	0.78	1.60	2.17	3.51	96	---	---	---	---	---	---	---
	2.5	2.50	---	---	1.60	2.50	3.20	0.36	0.64	0.87	1.62	2.89	3.92	96	---	---	---	---	---	---	---
	3.5	3.50	---	---	1.60	3.50	4.20	0.37	0.98	1.30	1.63	4.43	5.88	96	---	---	---	---	---	---	---
	4.2	4.20	---	---	1.60	4.20	4.60	0.37	1.21	1.49	1.63	5.47	6.70	96	---	---	---	---	---	---	---
	5.0	---	5.00	---	1.60	5.00	5.40	0.35	1.76	2.03	1.55	7.94	9.18	96	---	---	---	---	---	---	---
	1.5+1.5	1.50	1.50	---	1.70	3.00	4.70	0.35	0.55	1.32	1.55	2.50	5.98	96	5.48	A	274	A+++	8.64	3.00	122
	1.5+2.0	1.50	2.00	---	1.70	3.50	4.70	0.35	0.66	1.30	1.55	2.99	5.88	96	5.31	A	330	A+++	8.60	3.50	143
	1.5+2.5	1.50	2.50	---	1.70	4.00	5.00	0.35	0.78	1.92	1.55	3.54	8.66	96	5.16	A	388	A+++	8.54	4.00	164
	1.5+3.5	1.50	3.50	---	1.70	5.00	6.00	0.35	1.06	2.17	1.55	4.81	9.80	96	4.75	A	527	A+++	8.51	5.00	206
	1.5+4.2	1.37	3.83	---	1.70	5.20	6.10	0.35	1.10	2.26	1.55	4.99	10.21	96	4.74	A	549	A+++	8.51	5.20	214
	1.5+5.0	1.20	4.00	---	1.70	5.20	6.30	0.35	1.10	2.28	1.55	4.99	10.31	96	4.77	A	546	A+++	8.50	5.20	215
	2.0+2.0	2.00	2.00	---	1.70	4.00	6.00	0.35	0.85	2.25	1.55	3.85	10.16	96	4.72	A	424	A+++	8.52	4.00	165
	2.0+2.5	2.00	2.50	---	1.70	4.50	6.20	0.35	0.95	2.21	1.55	4.31	9.99	96	4.74	A	475	A+++	8.50	4.50	186
	2.0+3.5	1.89	3.31	---	1.70	5.20	6.30	0.35	1.10	2.30	1.55	4.99	10.38	96	4.76	A	547	A+++	8.53	5.20	214
	2.0+4.2	1.68	3.52	---	1.70	5.20	6.30	0.35	1.09	2.25	1.55	4.94	10.18	96	4.78	A	544	A+++	8.52	5.20	214
	2.0+5.0	1.49	3.71	---	1.70	5.20	6.50	0.35	1.09	2.19	1.55	4.94	9.89	96	4.80	A	542	A+++	8.51	5.20	214
	2.5+2.5	2.50	2.50	---	1.70	5.00	6.30	0.35	1.04	2.34	1.55	4.72	10.59	96	4.85	A	516	A+++	8.59	5.00	204
	2.5+3.5	2.17	3.03	---	1.70	5.20	6.30	0.35	1.09	2.28	1.55	4.94	10.31	96	4.78	A	544	A+++	8.58	5.20	213
	2.5+4.2	1.94	3.26	---	1.70	5.20	6.40	0.35	1.09	2.30	1.55	4.94	10.41	96	4.80	A	542	A+++	8.56	5.20	213
	2.5+5.0	1.73	3.47	---	1.70	5.20	6.50	0.35	1.06	2.14	1.55	4.81	9.68	96	4.92	A	529	A+++	8.53	5.20	214
	3.5+3.5	2.60	2.60	---	1.70	5.20	6.40	0.35	1.08	2.28	1.55	4.90	10.31	96	4.82	A	540	A+++	8.57	5.20	213
	3.5+4.2	2.36	2.84	---	1.70	5.20	6.40	0.35	1.08	2.26	1.55	4.90	10.21	96	4.83	A	539	A+++	8.55	5.20	213
	3.5+5.0	2.14	3.06	---	1.70	5.20	6.60	0.35	1.06	2.19	1.55	4.81	9.89	96	4.94	A	527	A+++	8.50	5.20	215
	4.2+4.2	2.60	2.60	---	1.70	5.20	6.50	0.35	1.07	2.24	1.55	4.85	10.11	96	4.88	A	533	A+++	8.54	5.20	213
	1.5+1.5+1.5	1.50	1.50	1.50	1.80	4.50	6.70	0.37	0.90	2.28	1.65	4.08	10.30	96	5.00	A	450	A+++	8.58	4.50	184
	1.5+1.5+2.0	1.50	1.50	2.00	1.80	5.00	6.70	0.37	1.06	2.26	1.65	4.81	10.20	96	4.76	A	526	A+++	8.51	5.20	214
	1.5+1.5+2.5	1.42	1.42	2.36	1.80	5.20	6.70	0.37	1.09	2.23	1.65	4.94	10.10	96	4.78	A	544	A+++	8.50	5.20	215
	1.5+1.5+3.5	1.20	1.20	2.80	1.90	5.20	6.80	0.37	1.09	2.28	1.65	4.94	10.30	96	4.81	A	541	A+++	8.50	5.20	215
	1.5+1.5+4.2	1.08	1.08	3.03	1.90	5.20	6.80	0.37	1.08	2.26	1.65	4.90	10.20	96	4.83	A	539	A+++	8.50	5.20	215
	1.5+1.5+5.0	0.98	0.98	3.25	2.00	5.20	7.10	0.35	1.05	2.17	1.55	4.76	9.80	96	4.98	A	523	A++	8.24	5.20	221
	1.5+2.0+2.0	1.42	1.89	1.89	1.80	5.20	6.70	0.37	1.10	2.21	1.65	4.99	10.00	96	4.77	A	546	A+++	8.50	5.20	215
	1.5+2.0+2.5	1.30	1.73	2.17	1.80	5.20	6.70	0.37	1.09	2.19	1.65	4.94	9.90	96	4.79	A	543	A+++	8.50	5.20	215
	1.5+2.0+3.5	1.11	1.49	2.60	1.90	5.20	6.80	0.37	1.08	2.23	1.65	4.90	10.10	96	4.82	A	540	A+++	8.50	5.20	215
	1.5+2.0+4.2	1.01	1.35	2.84	1.90	5.20	6.80	0.37	1.08	2.19	1.65	4.90	9.90	96	4.84	A	538	A+++	8.50	5.20	215
	1.5+2.0+5.0	0.92	1.22	3.06	2.00	5.20	7.20	0.35	1.04	2.15	1.55	4.72	9.70	96	5.01	A	519	A++	8.24	5.20	221
	1.5+2.5+2.5	1.20	2.00	2.00	1.80	5.20	6.70	0.37	1.09	2.17	1.65	4.94	9.80	96	4.81	A	541	A+++	8.52	5.20	214
	1.5+2.5+3.5	1.04	1.73	2.43	1.90	5.20	6.80	0.37	1.08	2.21	1.65	4.90	10.00	96	4.85	A	537	A+++	8.51	5.20	214
	1.5+2.5+4.2	0.95	1.59	2.66	1.90	5.20	6.80	0.37	1.07	2.19	1.65	4.85	9.90	96	4.87	A	534	A+++	8.50	5.20	214
	1.5+2.5+5.0	0.87	1.44	2.89	2.00	5.20	7.30	0.35	1.04	2.17	1.55	4.72	9.80	96	5.03	A	517	A++	8.17	5.20	223
	1.5+3.5+3.5	0.92	2.14	2.14	1.80	5.20	7.30	0.37	1.07	2.15	1.65	4.85	9.70	96	4.89	A	532	A+++	8.50	5.20	215
	2.0+2.0+2.0	1.73	1.73	1.73	1.80	5.20	7.00	0.37	1.07	2.22	1.65	4.85	10.05	96	4.87	A	534	A+++	8.51	5.20	214
	2.0+2.0+2.5	1.60	1.60	2.00	1.80	5.20	7.00	0.37	1.06	2.21	1.65	4.81	10.00	96	4.94	A	527	A+++	8.51	5.20	214
	2.0+2.0+3.5	1.39	1.39	2.43	1.90	5.20	7.20	0.39	1.05	2.17	1.75	4.76	9.80	96	4.96	A	525	A+++	8.50	5.20	214
	2.0+2.0+4.2	1.27	1.27	2.66	1.90	5.20	7.20	0.39	1.04	2.15	1.75	4.72	9.70	96	5.00	A	520	A+++	8.50	5.20	214
	2.0+2.0+5.0	1.16	1.16	2.89	2.00	5.20	7.30	0.37	1.03	2.19	1.65	4.67	9.91	96	5.05	A	515	A++	8.14	5.20	224
	2.0+2.5+2.5	1.49	1.86	1.86	1.80	5.20	7.10	0.39	1.05	2.12	1.75	4.76	9.60	96	4.98	A	523	A+++	8.51	5.20	214
	2.0+2.5+3.5	1.30	1.63	2.28	1.90	5.20	7.20	0.39	1.04	2.15	1.75	4.72	9.70	96	5.01	A	519	A+++	8.50	5.20	215
	2.0+2.5+4.2	1.20	1.49	2.51	1.90	5.20	7.20	0.39	1.04	2.14	1.75	4.72	9.65	96	5.03	A	517	A+++	8.50	5.20	214
	2.0+3.5+3.5	1.16	2.02	2.02	1.90	5.20	7.30	0.39	1.04	2.15	1.75	4.72	9.70	96	5.02	A	518	A+++	8.50	5.20	215
	2.5+2.5+2.5	1.73	1.73	1.73	1.90	5.20	7.10	0.39	1.04	2.19	1.75	4.72	9.90	96	5.00	A	520	A+++	8.50	5.20	215
	2.5+2.5+3.5	1.53	1.53	2.14	1.90	5.20	7.20	0.39	1.04	2.16	1.75	4.72	9.75	96	5.02	A	518	A+++	8.50	5.20	215

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)			Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	C room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
3MXM52N2V1B	1.5	0.23	---	---	1.10	2.30	3.40	0.30	0.57	1.09	1.34	2.55	4.94	96	---	---	---	---	---	---	---
	2.0	0.27	---	---	1.10	2.70	3.80	0.30	0.76	1.27	1.34	3.40	5.75	96	---	---	---	---	---	---	---
	2.5	0.34	---	---	1.10	3.40	4.20	0.30	1.01	1.36	1.34	4.54	6.16	96	---	---	---	---	---	---	---
	3.5	0.42	---	---	1.10	4.20	4.80	0.30	1.42	1.74	1.34	6.39	7.88	96	---	---	---	---	---	---	---
	4.2	0.48	---	---	1.10	4.80	5.60	0.30	1.62	2.03	1.34	7.32	9.18	96	---	---	---	---	---	---	---
	5.0	---	0.58	---	1.10	5.80	6.80	0.30	2.17	2.58	1.34	9.80	11.68	96	---	---	---	---	---	---	---
	1.5+1.5	0.18	0.18	---	1.20	3.60	5.80	0.32	0.67	1.62	1.44	3.04	7.34	96	5.42	A	A++	4.60	3.60	1095	0.5
	1.5+2.0	0.17	0.23	---	1.20	4.00	5.80	0.32	0.77	1.60	1.44	3.49	7.25	96	5.21	A	A++	4.65	3.60	1084	0.5
	1.5+2.5	0.17	0.28	---	1.20	4.50	6.90	0.32	0.91	2.06	1.44	4.13	9.33	96	4.96	A	A+	4.44	4.20	1325	0.7
	1.5+3.5	0.17	0.39	---	1.20	5.50	7.00	0.32	1.22	2.25	1.44	5.53	10.19	96	4.53	A	A+	4.30	4.80	1562	0.8
	1.5+4.2	0.16	0.44	---	1.20	6.00	7.00	0.32	1.42	2.23	1.44	6.44	10.10	96	4.24	A	A+	4.34	4.80	1546	0.8
	1.5+5.0	0.16	0.52	---	1.30	6.80	7.20	0.32	1.58	2.30	1.44	7.16	10.42	96	4.33	A	A+	4.47	4.80	1501	0.7
	2.0+2.0	0.34	0.34	---	1.20	6.80	7.00	0.32	1.59	2.26	1.44	7.21	10.24	96	4.28	A	A+	4.27	4.80	1573	0.9
	2.0+2.5	0.30	0.38	---	1.20	6.80	7.00	0.32	1.58	2.25	1.44	7.16	10.19	96	4.32	A	A+	4.30	4.80	1563	0.9
	2.0+3.5	0.25	0.43	---	1.20	6.80	7.10	0.32	1.57	2.26	1.44	7.12	10.24	96	4.34	A	A+	4.33	4.80	1552	0.8
	2.0+4.2	0.22	0.46	---	1.20	6.80	7.10	0.32	1.56	2.24	1.44	7.07	10.14	96	4.36	A	A+	4.36	4.80	1541	0.8
	2.0+5.0	0.19	0.49	---	1.40	6.80	7.20	0.32	1.53	2.28	1.44	6.93	10.32	96	4.46	A	A+	4.50	4.80	1492	0.7
	2.5+2.5	0.34	0.34	---	1.20	6.80	7.00	0.32	1.53	2.23	1.44	6.93	10.10	96	4.45	A	A+	4.38	4.80	1533	0.9
	2.5+3.5	0.28	0.40	---	1.30	6.80	7.20	0.32	1.53	2.35	1.44	6.93	10.64	96	4.46	A	A+	4.41	4.80	1523	0.8
	2.5+4.2	0.25	0.43	---	1.30	6.80	7.20	0.32	1.52	2.33	1.44	6.89	10.55	96	4.48	A	A+	4.45	4.80	1508	0.8
	2.5+5.0	0.23	0.45	---	1.40	6.80	7.40	0.32	1.50	2.33	1.44	6.80	10.52	96	4.54	A	A+	4.53	4.80	1482	0.7
	3.5+3.5	0.34	0.34	---	1.40	6.80	7.30	0.32	1.52	2.38	1.44	6.89	10.78	96	4.50	A	A+	4.40	5.00	1590	0.9
	3.5+4.2	0.31	0.37	---	1.40	6.80	7.30	0.32	1.51	2.36	1.44	6.84	10.69	96	4.52	A	A+	4.43	5.00	1579	0.9
	3.5+5.0	0.28	0.40	---	1.45	6.80	7.50	0.32	1.50	2.30	1.44	6.80	10.42	96	4.56	A	A+	4.52	5.00	1548	0.8
	4.2+4.2	0.34	0.34	---	1.40	6.80	7.30	0.32	1.50	2.35	1.44	6.80	10.62	96	4.55	A	A+	4.46	5.00	1569	0.9
	1.5+1.5+1.5	0.23	0.23	0.23	1.30	6.80	8.00	0.32	1.40	2.12	1.44	6.35	9.60	96	4.87	A	A++	4.60	5.00	1522	0.9
	1.5+1.5+2.0	0.20	0.20	0.27	1.30	6.80	8.00	0.32	1.40	2.10	1.44	6.35	9.51	96	4.88	A	A++	4.61	5.00	1517	0.9
	1.5+1.5+2.5	0.19	0.19	0.31	1.30	6.80	8.00	0.32	1.39	2.08	1.44	6.30	9.42	96	4.91	A	A++	4.63	5.00	1512	0.9
	1.5+1.5+3.5	0.16	0.16	0.37	1.40	6.80	8.10	0.32	1.38	2.13	1.44	6.25	9.65	96	4.94	A	A++	4.65	5.00	1506	0.9
	1.5+1.5+4.2	0.14	0.14	0.40	1.40	6.80	8.10	0.32	1.38	2.11	1.44	6.25	9.56	96	4.96	A	A++	4.66	5.00	1500	0.9
	1.5+1.5+5.0	0.13	0.13	0.43	1.60	6.80	8.30	0.32	1.32	2.09	1.44	5.98	9.47	96	5.18	A	A++	4.83	5.00	1448	0.8
	1.5+2.0+2.0	0.19	0.25	0.25	1.30	6.80	8.00	0.32	1.39	2.14	1.44	6.30	9.69	96	4.90	A	A++	4.62	5.00	1515	0.9
	1.5+2.0+2.5	0.17	0.23	0.28	1.30	6.80	8.00	0.32	1.38	2.12	1.44	6.25	9.60	96	4.93	A	A++	4.64	5.00	1509	0.9
	1.5+2.0+3.5	0.15	0.19	0.34	1.40	6.80	8.10	0.32	1.37	2.16	1.44	6.21	9.78	96	4.97	A	A++	4.65	5.00	1503	0.9
	1.5+2.0+4.2	0.13	0.18	0.37	1.40	6.80	8.10	0.32	1.36	2.14	1.44	6.16	9.69	96	5.00	A	A++	4.67	5.00	1498	0.9
	1.5+2.0+5.0	0.12	0.16	0.40	1.60	6.80	8.30	0.32	1.31	2.07	1.44	5.94	9.38	96	5.22	A	A++	4.85	5.00	1443	0.8
	1.5+2.5+2.5	0.16	0.26	0.26	1.30	6.80	8.00	0.32	1.38	2.12	1.44	6.25	9.60	96	4.95	A	A++	4.64	5.00	1507	0.9
	1.5+2.5+3.5	0.14	0.23	0.32	1.40	6.80	8.10	0.32	1.37	2.13	1.44	6.21	9.65	96	4.99	A	A++	4.66	5.00	1501	0.9
	1.5+2.5+4.2	0.12	0.21	0.35	1.40	6.80	8.10	0.32	1.36	2.11	1.44	6.16	9.56	96	5.01	A	A++	4.68	5.00	1495	0.9
	1.5+2.5+5.0	0.11	0.19	0.38	1.60	6.80	8.30	0.32	1.30	2.09	1.44	5.89	9.47	96	5.26	A	A++	4.86	5.00	1438	0.8
	1.5+3.5+3.5	0.12	0.28	0.28	1.30	6.80	8.20	0.32	1.36	2.14	1.44	6.16	9.69	96	5.02	A	A++	4.70	5.00	1489	0.9
	2.0+2.0+2.0	0.23	0.23	0.23	1.30	6.80	8.00	0.32	1.39	2.13	1.44	6.30	9.65	96	4.91	A	A++	4.61	5.00	1516	0.9
	2.0+2.0+2.5	0.21	0.21	0.26	1.30	6.80	8.00	0.32	1.38	2.11	1.44	6.25	9.56	96	4.95	A	A++	4.63	5.00	1510	0.9
	2.0+2.0+3.5	0.18	0.18	0.32	1.40	6.80	8.10	0.32	1.37	2.12	1.44	6.21	9.60	96	4.98	A	A++	4.66	5.00	1501	0.9
	2.0+2.0+4.2	0.17	0.17	0.35	1.40	6.80	8.10	0.32	1.36	2.10	1.44	6.16	9.51	96	5.01	A	A++	4.68	5.00	1496	0.9
	2.0+2.0+5.0	0.15	0.15	0.38	1.60	6.80	8.30	0.32	1.29	2.08	1.44	5.85	9.42	96	5.30	A	A++	4.88	5.00	1434	0.8
	2.0+2.5+2.5	0.19	0.24	0.24	1.30	6.80	8.00	0.32	1.37	2.09	1.44	6.21	9.47	96	4.99	A	A++	4.64	5.00	1508	0.9
	2.0+2.5+3.5	0.17	0.21	0.30	1.50	6.80	8.10	0.32	1.36	2.11	1.44	6.16	9.56	96	5.03	A	A++	4.67	5.00	1499	0.9
	2.0+2.5+4.2	0.16	0.20	0.33	1.50	6.80	8.10	0.32	1.35	2.11	1.44	6.12	9.56	96	5.07	A	A++	4.68	5.00	1493	0.9
	2.0+3.5+3.5	0.15	0.26	0.26	1.50	6.80	8.20	0.32	1.35	2.15	1.44	6.12	9.74	96	5.05	A	A++	4.68	5.00	1496	0.9
	2.5+2.5+2.5	0.23	0.23	0.23	1.40	6.80	8.00	0.32	1.36	2.07	1.44	6.16	9.38	96	5.02	A	A++	4.65	5.00	1505	0.9
	2.5+2.5+3.5	0.20	0.20	0.28	1.50	6.80	8.10	0.32	1.35	2.09	1.44	6.12	9.47	96	5.05	A	A++	4.68	5.00	1496	0.9

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)			Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room		Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
	1.5	1.60	---	---	1.52	1.60	2.49	0.40	0.42	0.59	1.82	1.98	2.71	95	---	---	---	---	---	---	---
	2.0	2.00	---	---	1.66	2.00	2.68	0.42	0.43	0.60	1.91	2.08	2.75	95	---	---	---	---	---	---	---
	2.5	2.50	---	---	1.74	2.50	3.44	0.44	0.44	0.82	2.00	2.62	3.77	95	---	---	---	---	---	---	---
	3.5	3.50	---	---	1.93	3.50	4.86	0.46	0.46	1.43	2.09	3.84	6.53	95	---	---	---	---	---	---	---
	4.2	---	---	4.20	1.93	4.20	5.33	0.46	0.46	1.44	2.09	3.93	6.57	95	---	---	---	---	---	---	---
	5.0	---	---	5.00	1.94	5.00	6.03	0.44	0.44	2.13	2.00	7.20	9.77	95	---	---	---	---	---	---	---
	6.0	---	---	6.00	1.94	6.00	6.51	0.44	0.44	2.13	2.00	7.29	9.77	95	---	---	---	---	---	---	---
	1.5+1.5	1.50	1.50	---	1.95	3.00	4.79	0.40	0.51	1.15	1.81	2.34	5.25	95	5.96	A	255	A++	7.29	3.00	144
	1.5+2.0	1.50	2.00	---	1.95	3.50	4.96	0.40	0.62	1.22	1.81	2.84	5.58	95	5.66	A	310	A++	7.53	3.50	163
	1.5+2.5	1.50	2.50	---	1.95	4.00	5.28	0.40	0.75	1.36	1.81	3.44	6.23	95	5.36	A	375	A++	7.75	4.00	181
	1.5+3.5	1.50	3.50	---	1.95	5.00	6.17	0.39	1.04	1.83	1.77	4.76	8.39	95	4.81	A	520	A++	7.80	5.00	225
	1.5+4.2	1.50	4.20	---	1.95	5.70	6.39	0.39	1.27	1.96	1.77	5.82	8.96	95	4.51	A	635	A++	7.84	5.70	255
	1.5+5.0	1.50	5.00	---	1.95	6.50	7.08	0.38	1.50	2.23	1.73	6.87	10.22	95	4.36	A	750	A++	7.86	6.50	290
	1.5+6.0	1.36	5.44	---	1.96	6.80	7.59	0.37	1.62	2.36	1.68	7.42	10.79	95	4.21	A	810	A++	7.81	6.80	305
	2.0+2.0	2.00	2.00	---	1.95	4.00	5.12	0.40	0.75	1.29	1.81	3.44	5.91	95	5.36	A	375	A++	7.75	4.00	181
	2.0+2.5	2.00	2.50	---	1.95	4.50	5.44	0.40	0.89	1.43	1.81	4.08	6.56	95	5.06	A	445	A++	7.80	4.50	202
	2.0+3.5	2.00	3.50	---	1.95	5.50	6.30	0.39	1.17	1.91	1.77	5.36	8.76	95	4.71	A	585	A++	7.91	5.50	244
	2.0+4.2	2.00	4.20	---	1.95	6.20	6.51	0.39	1.43	2.05	1.77	6.55	9.37	95	4.36	A	715	A++	7.88	6.20	276
	2.0+5.0	1.94	4.86	---	1.95	6.80	7.26	0.38	1.59	2.36	1.73	7.28	10.79	95	4.28	A	795	A++	7.78	6.80	306
	2.0+6.0	1.70	5.10	---	1.96	6.80	7.71	0.37	1.61	2.45	1.68	7.37	11.20	95	4.23	A	805	A++	7.71	6.80	309
	2.5+2.5	2.50	2.50	---	1.95	5.00	6.10	0.41	1.01	1.78	1.89	4.63	8.15	95	4.96	A	505	A++	7.81	5.00	224
	2.5+3.5	2.50	3.50	---	1.95	6.00	6.57	0.40	1.29	2.11	1.81	5.91	9.65	95	4.66	A	645	A++	7.94	6.00	265
	2.5+4.2	2.50	4.20	---	1.95	6.70	6.95	0.40	1.51	2.38	1.81	6.92	10.88	95	4.46	A	755	A++	7.99	6.70	294
	2.5+5.0	2.27	4.53	---	1.95	6.80	7.37	0.37	1.50	2.45	1.68	6.87	11.20	95	4.56	A	750	A++	7.93	6.80	300
	2.5+6.0	2.00	4.80	---	1.96	6.80	7.71	0.35	1.48	2.45	1.60	6.78	11.20	95	4.61	A	740	A++	7.90	6.80	301
	3.5+3.5	3.40	3.40	---	1.95	6.80	7.13	0.38	1.45	2.37	1.73	6.64	10.83	95	4.70	A	725	A++	8.02	6.80	297
	3.5+4.2	3.09	3.71	---	1.95	6.80	7.24	0.38	1.45	2.46	1.73	6.64	11.24	95	4.72	A	725	A++	8.00	6.80	298
	3.5+5.0	2.80	4.00	---	1.95	6.80	7.76	0.35	1.42	2.78	1.60	6.50	12.71	95	4.82	A	710	A++	7.92	6.80	301
	3.5+6.0	2.51	4.29	---	2.26	6.80	8.07	0.40	1.40	2.72	1.81	6.41	12.46	95	4.87	A	700	A++	7.89	6.80	302
	4.2+4.2	---	3.40	3.40	1.95	6.80	7.14	0.38	1.44	2.37	1.73	6.60	10.83	95	4.74	A	720	A++	7.98	6.80	298
	4.2+5.0	---	3.10	3.70	1.95	6.80	7.77	0.35	1.41	2.78	1.60	6.46	12.71	95	4.84	A	705	A++	7.90	6.80	302
	4.2+6.0	---	2.80	4.00	2.26	6.80	8.08	0.40	1.40	2.72	1.81	6.41	12.46	95	4.89	A	700	A++	7.87	6.80	303
	5.0+5.0	---	3.40	3.40	2.34	6.80	8.22	0.43	1.38	2.98	1.98	6.32	13.65	95	4.94	A	690	A++	7.88	6.80	302
	5.0+6.0	---	3.09	3.71	2.47	6.80	8.45	0.44	1.37	2.92	2.02	6.28	13.36	95	4.99	A	685	A++	7.85	6.80	304
	1.5+1.5+1.5	1.50	1.50	1.50	1.96	4.50	6.40	0.39	0.61	1.57	1.77	2.80	7.17	95	7.46	A	305	A+++	8.54	4.50	185
	1.5+1.5+2.0	1.44	1.44	1.92	1.96	4.80	6.56	0.39	0.70	1.65	1.77	3.21	7.54	95	6.86	A	350	A+++	8.52	4.80	198
	1.5+1.5+2.5	1.36	1.36	2.27	1.96	5.00	6.72	0.39	0.80	1.73	1.77	3.67	7.90	95	6.26	A	400	A+++	8.50	5.00	206
	1.5+1.5+3.5	1.50	1.50	3.50	1.96	6.50	7.11	0.38	1.56	1.92	1.73	7.14	8.80	95	4.19	A	780	A++	7.85	6.50	290
	1.5+1.5+4.2	1.42	1.42	3.97	1.96	6.80	7.33	0.38	1.80	2.05	1.73	8.24	9.37	95	3.79	A	900	A++	7.71	6.80	309
	1.5+1.5+5.0	1.28	1.28	4.25	1.96	6.80	7.74	0.36	1.75	2.22	1.64	8.01	10.14	95	3.89	A	875	A++	7.64	6.80	312
	1.5+1.5+6.0	1.13	1.13	4.53	2.31	6.80	7.99	0.40	1.73	2.17	1.85	7.92	9.94	95	3.94	A	865	A++	7.62	6.80	313
3MXM68N2V1B	1.5+2.0+2.0	1.50	2.00	2.00	1.96	5.50	6.48	0.39	1.01	1.61	1.77	4.63	7.37	95	5.46	A	505	A++	8.17	5.50	236
	1.5+2.0+2.5	1.50	2.00	2.50	1.96	6.00	6.87	0.39	1.32	1.81	1.77	6.05	8.27	95	4.56	A	660	A++	7.90	6.00	266
	1.5+2.0+3.5	1.46	1.94	3.40	1.96	6.80	7.25	0.38	1.80	2.01	1.73	8.24	9.21	95	3.79	A	900	A++	7.71	6.80	309
	1.5+2.0+4.2	1.32	1.77	3.71	1.96	6.80	7.47	0.38	1.79	2.14	1.73	8.20	9.78	95	3.81	A	895	A++	7.69	6.80	310
	1.5+2.0+5.0	1.20	1.60	4.00	1.96	6.80	7.87	0.36	1.74	2.31	1.64	7.97	10.55	95	3.91	A	870	A++	7.63	6.80	312
	1.5+2.0+6.0	1.07	1.43	4.29	2.31	6.80	8.13	0.40	1.72	2.26	1.85	7.88	10.35	95	3.96	A	860	A++	7.60	6.80	313
	1.5+2.5+2.5	1.50	2.50	2.50	1.96	6.50	7.10	0.38	1.63	1.92	1.73	7.46	8.80	95	4.01	A	815	A++	7.76	6.50	294
	1.5+2.5+3.5	1.36	2.27	3.17	1.96	6.80	7.60	0.36	1.79	2.23	1.64	8.20	10.18	95	3.81	A	895	A++	7.69	6.80	310
	1.5+2.5+4.2	1.24	2.07	3.48	1.96	6.80	7.81	0.36	1.78	2.35	1.64	8.15	10.75	95	3.83	A	890	A++	7.67	6.80	310
	1.5+2.5+5.0	1.13	1.89	3.78	1.96	6.80	7.95	0.36	1.74	2.35	1.64	7.97	10.75	95	3.93	A	870	A++	7.61	6.80	313
	1.5+2.5+6.0	1.02	1.70	4.08	2.31	6.80	8.42	0.41	1.71	2.44	1.89	7.83	11.16	95	3.98	A	855	A++	7.59	6.80	314
	1.5+3.5+3.5	1.20	2.80	2.80	1.96	6.80	7.94	0.37	1.77	2.45	1.68	8.11	11.20	95	3.85	A	885	A++	7.67	6.80	311
	1.5+3.5+4.2	1.11	2.59	3.10	1.96	6.80	8.13	0.37	1.76	2.58	1.68	8.06	11.81	95	3.87	A	880	A++	7.65	6.80	311
	1.5+3.5+5.0	1.02	2.38	3.40	1.96	6.80	8.46	0.33	1.72	2.72	1.52	7.88	12.46	95	3.97	A	860	A++	7.58	6.80	314
	1.5+3.5+6.0	0.93	2.16	3.71	2.31	6.80	8.56	0.41	1.70	2.53	1.89	7.79	11.57	95	4.02	A	850	A++	7.56	6.80	315
	1.5+4.2+4.2	1.03	2.88	2.88	1.96	6.80	8.26	0.37	1.75	2.68	1.68	8.01	12.26	95	3.89	A	875	A++	7.63	6.80	312
	1.5+4.2+5.0	0.95	2.67	3.18	1.96	6.80	8.53	0.33	1.71	2.77	1.52	7.83	12.67	95	3.99	A	855	A++	7.56	6.80	315
	2.0+2.0+2.0	2.00	2.00	2.00	1.96	6.00	6.64	0.39	1.34	1.68	1.77	6.14	7.70	95	4.51	A	670	A++	7.84	6.00	268
	2.0+2.0+2.5	2.00	2.00	2.50	1.96	6.50	7.03	0.39	1.63	1.89	1.77	7.46	8.64	95	4.01	A	815	A++	7.76	6.50	294
	2.0+2.0+3.5	1.81	1.81	3.17	1.96	6.80	7.40	0.38	1.79	2.09	1.73	8.20	9.57	95	3.81	A	895	A++	7.69	6.80	310
	2.0+2.0+4.2	1.66	1.66	3.48	1.96	6.80	7.61	0.38	1.78	2.23	1.73	8.15	10.18	95	3.83	A	890	A++	7.67	6.80	310
	2.0+2.0+5.0	1.51	1.51	3.78	1.96	6.80	8.01	0.36	1.74	2.39	1.64	7.97	10.96	95	3.93	A	870	A++	7.61	6.80	313
	2.0+2.0+6.0	1.36	1.36	4.08	2.31	6.80	8.27	0.40	1.71	2.35	1.85	7.83	10.75	95	3.98	A	855	A++	7.59	6.80	314
	2.0+2.5+2.5	1.94	2.43	2.43	1.96	6.80	7.24	0.38	1.77	2.01	1.73	8.11	9.21	95	3.85	A	885	A++	7.71	6.80	309
	2.0+2.5+3.5	1.70	2.13	2.98	1.96	6.80	7.74	0.36	1.76	2.31	1.64	8.06	10.55	95	3.87	A	880	A++	7.69	6.80	310
	2.0+2.5+4.2	1.56	1.95	3.28	1.96	6.80	7.94	0.36	1.75	2.45	1.64	8.01	11.20	95	3.89	A	875	A++	7.68	6.80	310
	2.0+2.5+5.0	1.43	1.79	3.58	1.96	6.80	8.08	0.36	1.71	2.44	1.64	7.83	11.16	95	3.99	A	855	A++	7.61	6.80	313
	2.0+2.5+6.0	1.30	1.62	3.89	2.31	6.80	8.55	0.41	1.69	2.53	1.89	7.74	11.57	95	4.04	A	845	A++	7.58	6.80	314
	2.0+3.5+3.5	1.51	2.64	2.64	1.96	6.80	8.07	0.37	1.74	2.54	1.68	7.97	11.61	95	3.91	A	870	A++	7.67	6.80	311
	2.0+3.5+4.2	1.40	2.45	2.94	1.96	6.80	8.25	0.37	1.74	2.68	1.68	7.97	12.26	95	3.93	A	870	A++	7.65	6.80	311
	2.0+3.5+5.0	1.30	2.27	3.24	2.28	6.80	8.58	0.40	1.69	2.82	1.85	7.74	12.91	95	4.03	A	845	A++	7.58	6.80	314
	2.0+4.2+4.2	1.31	2.75	2.75	1.96	6.80	8.37	0.37	1.73	2.77	1.68	7.92	12.67	95	3.95	A	865	A++	7.63	6.80	312
	2.5+2.5+2.5	2.27	2.27	2.27	1.96	6.80	7.53	0.38	1.76	2.18	1.73	8.06	9.98	95	3.87	A	880	A++	7.70	6.80	310
	2.5+2.5+3.5	2.00	2.00	2.80	1.96	6.80	7.94	0.36	1.72	2.45	1.64	7.88	11.20	95	3.97	A	860	A++	7.62	6.80	313
	2.5+2.5+4.2	1.85	1.85	3.10	1.96	6.80	8.12	0.36	1.71	2.58	1.64	7.83	11.81	95	3.99	A	855	A++	7.60	6.80	313
	2.5+2.5+5.0	1.70	1.70	3.40	2.28	6.80	8.45	0.40	1.67	2.72	1.85	7.65	12.46	95	4.09	A	835	A++	7.53	6.80	316
	2.5+2.5+6.0	1.55	1.55	3.71	2.42	6.80	8.74	0.40	1.65	2.67	1.85	7.56	12.22	95	4.14	A	825	A++	7.51	6.80	317
	2.5+3.5+3.5	1.79	2.51	2.51	2.27	6.80	8.30	0.40	1.70	2.72	1.85	7.79	12.46	95	4.01	A	850	A++	7.59	6.80	314
	2.5+3.5+4.2	1.67	2.33	2.80	2.27	6.80	8.43	0.40	1.69	2.82	1.85	7.74	12.91	95	4.03	A	845	A++	7.58	6.80	314
	2.5+3.5+5.0	1.55	2.16	3.09	2.48	6.80	8.74	0.42	1.65	2.96	1.94	7.56	13.56	95	4.13	A	825	A++	7.50	6.80	317
	2.5+4.2+4.2	1.56	2.62	2.62	2.27	6.80	8.49	0.40	1.68	2.87	1.85	7.69	13.12	95	4.05	A	840	A++	7.56	6.80	315
	3.5+3.5+3.5	2.27	2.27	2.27	2.38	6.80	8.59	0.40	1.68	2.96	1.81	7.69	13.56	95	4.05	A	840	A++	7.57	6.80	315

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)			Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	C room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
	30	2.70	---	---	1.47	2.70	4.08	0.42	0.72	1.22	1.91	3.35	5.59	95	---	---	---	---	---	---	---
	40	2.72	---	---	1.48	2.72	4.09	0.43	0.73	1.28	1.95	3.39	5.64	95	---	---	---	---	---	---	---
	50	3.40	---	---	1.44	3.40	4.30	0.42	1.02	1.37	1.91	4.72	6.08	95	---	---	---	---	---	---	---
	70	4.30	---	---	1.45	4.30	4.90	0.40	1.41	1.75	1.82	6.50	7.15	95	---	---	---	---	---	---	---
	84	---	4.32	---	1.44	4.32	5.70	0.40	1.40	2.04	1.82	6.46	7.15	95	---	---	---	---	---	---	---
	100	---	5.60	---	1.66	5.60	6.90	0.39	1.82	2.59	1.78	8.43	8.70	95	---	---	---	---	---	---	---
	120	---	7.90	---	1.88	7.90	8.91	0.37	2.62	2.64	1.69	12.13	12.08	95	---	---	---	---	---	---	---
	1.5+1.5	2.65	2.65	---	1.65	5.30	7.38	0.36	1.19	1.83	1.63	5.45	8.38	95	4.45	A	A	3.85	3.80	1380	0.73
	1.5+2.0	2.44	3.26	---	1.65	5.70	7.76	0.36	1.31	1.99	1.63	6.00	9.09	95	4.35	A	A	3.85	3.80	1380	0.72
	1.5+2.5	2.29	3.81	---	1.65	6.10	7.95	0.36	1.43	2.06	1.63	6.55	9.43	95	4.27	A	A	3.87	3.80	1373	0.71
	1.5+3.5	2.07	4.83	---	1.80	6.90	8.50	0.37	1.69	2.35	1.68	7.74	10.74	95	4.10	A	A	3.86	4.30	1558	0.92
	1.5+4.2	1.97	5.53	---	1.80	7.50	8.85	0.37	1.90	2.57	1.68	8.70	11.75	95	3.97	A	A	3.88	4.30	1548	0.91
	1.5+5.0	1.89	6.31	---	2.18	8.20	10.38	0.45	2.13	2.91	2.06	9.75	13.31	95	3.86	A	A	3.87	4.50	1628	0.96
	1.5+6.0	1.72	6.88	---	2.46	8.60	10.58	0.48	2.28	2.67	2.19	10.44	12.21	95	3.78	A	A	3.91	4.80	1717	1.07
	2.0+2.0	3.25	3.25	---	1.65	6.50	7.95	0.36	1.37	2.31	1.63	6.28	9.47	95	4.75	A	A	3.91	3.80	1361	0.71
	2.0+2.5	3.07	3.83	---	1.65	6.90	8.12	0.36	1.52	2.32	1.63	6.96	9.81	95	4.56	A	A	3.92	3.80	1354	0.71
	2.0+3.5	2.73	4.77	---	1.80	7.50	8.67	0.37	1.75	2.43	1.68	8.01	11.12	95	4.30	A	A	3.86	4.30	1558	0.91
	2.0+4.2	2.58	5.42	---	1.80	8.00	9.03	0.37	1.98	2.66	1.68	9.07	12.17	95	4.06	A	A	3.88	4.30	1550	0.90
	2.0+5.0	2.46	6.14	---	2.18	8.60	10.56	0.45	2.26	3.00	2.06	10.35	13.73	95	3.82	A	A	3.90	4.50	1612	0.96
	2.0+6.0	2.15	6.45	---	2.46	8.60	10.75	0.48	2.24	2.74	2.19	10.26	12.55	95	3.84	A	A	3.93	4.80	1710	1.07
	2.5+2.5	3.60	3.60	---	1.65	7.20	8.49	0.36	1.62	2.36	1.63	7.42	10.78	95	4.46	A	A	3.85	4.00	1455	0.79
	2.5+3.5	3.29	4.61	---	1.89	7.90	9.03	0.38	1.91	2.66	1.72	8.75	12.17	95	4.14	A	A	3.83	4.30	1569	0.90
	2.5+4.2	3.10	5.20	---	1.89	8.30	9.29	0.38	2.11	2.82	1.72	9.66	12.93	95	3.95	A	A	3.86	4.30	1559	0.90
	2.5+5.0	2.87	5.73	---	2.27	8.60	10.68	0.46	2.24	3.09	2.11	10.26	14.15	95	3.86	A	A	3.84	4.50	1637	0.91
	2.5+6.0	2.53	6.07	---	2.55	8.60	10.88	0.50	2.22	2.77	2.28	10.17	12.67	95	3.88	A	A	3.91	4.80	1716	1.00
	3.5+3.5	4.30	4.30	---	2.17	8.60	9.38	0.42	2.26	2.86	1.94	10.35	13.09	95	3.81	A	A+	4.00	4.80	1680	1.07
	3.5+4.2	3.91	4.69	---	2.17	8.60	9.47	0.42	2.26	2.91	1.94	10.35	13.31	95	3.82	A	A+	4.01	4.80	1675	1.06
	3.5+5.0	3.54	5.06	---	2.56	8.60	10.90	0.51	2.22	3.13	2.32	10.17	14.32	95	3.88	A	A+	4.01	4.80	1675	1.03
	3.5+6.0	3.17	5.43	---	2.74	8.60	11.01	0.52	2.21	2.76	2.37	10.12	12.63	95	3.91	A	A+	4.06	4.80	1652	1.01
	4.2+4.2	---	4.30	4.30	2.17	8.60	9.56	0.42	2.22	2.94	1.94	10.17	13.47	95	3.88	A	A+	4.00	4.80	1679	1.04
	4.2+5.0	---	3.93	4.67	2.56	8.60	10.91	0.51	2.21	3.19	2.32	10.12	14.61	95	3.90	A	A	3.93	5.20	1851	1.20
	4.2+6.0	---	3.54	5.06	2.74	8.60	11.02	0.51	2.20	2.79	2.32	10.07	12.76	95	3.92	A	A+	4.03	5.20	1804	1.18
	5.0+5.0	---	4.30	4.30	2.94	8.60	11.10	0.59	2.17	3.11	2.71	9.94	14.23	95	3.98	A	A+	4.06	5.20	1793	1.15
	5.0+6.0	---	3.91	4.69	3.14	8.60	11.10	0.60	2.15	2.72	2.75	9.84	12.46	95	4.01	A	A+	4.09	5.20	1779	1.13
	1.5+1.5+1.5	2.17	2.17	2.17	2.01	6.50	9.92	0.41	1.33	2.26	1.89	6.09	10.36	95	4.91	A	A+	4.07	5.30	1822	1.11
	1.5+1.5+2.0	2.07	2.07	2.76	2.01	6.90	10.10	0.41	1.46	2.34	1.89	6.69	10.69	95	4.74	A	A+	4.08	5.30	1817	1.10
	1.5+1.5+2.5	2.02	2.02	3.36	2.10	7.40	10.18	0.42	1.64	2.37	1.94	7.51	10.86	95	4.53	A	A+	4.09	5.30	1810	1.09
	1.5+1.5+3.5	1.89	1.89	4.42	2.31	8.20	10.29	0.44	1.87	2.49	2.02	8.56	11.41	95	4.39	A	A+	4.14	5.30	1793	1.07
	1.5+1.5+4.2	1.79	1.79	5.02	2.31	8.60	10.29	0.44	2.03	2.49	2.02	9.30	11.41	95	4.25	A	A+	4.15	5.30	1786	1.07
	1.5+1.5+5.0	1.61	1.61	5.38	2.71	8.60	10.46	0.55	2.01	2.57	2.50	9.20	11.75	95	4.29	A	A+	4.23	5.30	1752	1.03
	1.5+1.5+6.0	1.43	1.43	5.73	2.93	8.60	10.59	0.55	1.99	2.31	2.50	9.11	10.57	95	4.33	A	A+	4.27	5.30	1735	1.01
3MXM68N2V1B	1.5+2.0+2.0	2.35	3.13	3.13	2.01	8.60	10.26	0.41	2.05	2.41	1.89	9.39	11.03	95	4.21	A	A+	4.09	5.30	1814	1.10
	1.5+2.0+2.5	2.15	2.87	3.58	2.10	8.60	10.36	0.42	2.04	2.44	1.94	9.34	11.16	95	4.23	A	A+	4.10	5.30	1807	1.09
	1.5+2.0+3.5	1.84	2.46	4.30	2.31	8.60	10.45	0.44	2.02	2.58	2.02	9.25	11.79	95	4.26	A	A+	4.14	5.30	1793	1.07
	1.5+2.0+4.2	1.68	2.23	4.69	2.31	8.60	10.46	0.44	2.01	2.57	2.02	9.20	11.75	95	4.28	A	A+	4.15	5.30	1786	1.07
	1.5+2.0+5.0	1.52	2.02	5.06	2.71	8.60	10.88	0.55	2.00	2.64	2.50	9.16	12.08	95	4.32	A	A+	4.23	5.30	1752	1.03
	1.5+2.0+6.0	1.36	1.81	5.43	2.93	8.60	10.89	0.55	1.98	2.38	2.50	9.07	10.91	95	4.36	A	A+	4.27	5.30	1735	1.01
	1.5+2.5+2.5	1.98	3.31	3.31	2.20	8.60	10.47	0.45	2.03	2.44	2.06	9.30	11.16	95	4.25	A	A+	4.12	5.30	1800	1.08
	1.5+2.5+3.5	1.72	2.87	4.01	2.40	8.60	10.58	0.47	2.02	2.57	2.15	9.25	11.75	95	4.27	A	A+	4.16	5.30	1782	1.06
	1.5+2.5+4.2	1.57	2.62	4.40	2.41	8.60	10.58	0.47	2.00	2.57	2.15	9.16	11.75	95	4.30	A	A+	4.19	5.30	1768	1.05
	1.5+2.5+5.0	1.43	2.39	4.78	2.81	8.60	11.00	0.56	1.99	2.64	2.58	9.11	12.08	95	4.34	A	A+	4.27	5.30	1735	1.01
	1.5+2.5+6.0	1.29	2.15	5.16	3.02	8.60	11.00	0.57	1.97	2.38	2.62	9.02	10.91	95	4.38	A	A+	4.31	5.30	1719	0.99
	1.5+3.5+3.5	1.52	3.54	3.54	2.69	8.60	10.59	0.55	1.99	2.57	2.50	9.11	11.75	95	4.33	A	A+	4.20	5.30	1765	1.04
	1.5+3.5+4.2	1.40	3.27	3.93	2.69	8.60	10.59	0.55	1.98	2.56	2.50	9.07	11.71	95	4.35	A	A+	4.22	5.30	1755	1.03
	1.5+3.5+5.0	1.29	3.01	4.30	3.00	8.60	10.93	0.62	1.97	2.59	2.84	9.02	11.87	95	4.38	A	A+	4.30	5.30	1722	0.99
	1.5+3.5+6.0	1.17	2.74	4.69	2.93	8.60	10.93	0.55	1.96	2.37	2.50	8.98	10.86	95	4.40	A	A+	4.34	5.30	1707	0.98
	1.5+4.2+4.2	1.30	3.65	3.65	2.69	8.60	10.68	0.55	1.98	2.59	2.50	9.07	11.87	95	4.35	A	A+	4.24	5.30	1748	1.02
	1.5+4.2+5.0	1.21	3.38	4.02	3.00	8.60	10.99	0.62	1.96	2.67	2.84	8.98	12.21	95	4.39	A	A+	4.32	5.30	1716	0.99
	2.0+2.0+2.0	2.60	2.60	2.60	2.01	7.80	10.44	0.41	1.72	2.48	1.89	7.88	11.37	95	4.56	A	A+	4.07	5.30	1821	1.10
	2.0+2.0+2.5	2.52	2.52	3.15	2.10	8.20	10.52	0.42	1.83	2.52	1.94	8.38	11.54	95	4.49	A	A+	4.09	5.30	1814	1.10
	2.0+2.0+3.5	2.29	2.29	4.01	2.31	8.60	10.63	0.44	2.04	2.65	2.02	9.34	12.13	95	4.22	A	A+	4.13	5.30	1796	1.08
	2.0+2.0+4.2	2.10	2.10	4.40	2.31	8.60	10.63	0.44	2.02	2.65	2.02	9.25	12.13	95	4.26	A	A+	4.14	5.30	1789	1.07
	2.0+2.0+5.0	1.91	1.91	4.78	2.71	8.60	10.82	0.55	2.00	2.72	2.50	9.16	12.46	95	4.30	A	A+	4.22	5.30	1755	1.03
	2.0+2.0+6.0	1.72	1.72	5.16	2.93	8.60	10.95	0.55	1.99	2.46	2.50	9.11	11.24	95	4.32	A	A+	4.26	5.30	1739	1.01
	2.0+2.5+2.5	2.46	3.07	3.07	2.20	8.60	10.54	0.43	1.97	2.61	1.98	9.02	11.96	95	4.38	A	A+	4.10	5.30	1807	1.09
	2.0+2.5+3.5	2.15	2.69	3.76	2.40	8.60	10.63	0.46	2.02	2.65	2.11	9.25	12.13	95	4.27	A	A+	4.14	5.30	1789	1.07
	2.0+2.5+4.2	1.98	2.47	4.15	2.41	8.60	10.64	0.46	2.01	2.64	2.11	9.20	12.08	95	4.29	A	A+	4.16	5.30	1782	1.06
	2.0+2.5+5.0	1.81	2.26	4.53	2.81	8.60	11.06	0.56	1.98	2.75	2.58	9.07	12.59	95	4.34	A	A+	4.24	5.30	1748	1.02
	2.0+2.5+6.0	1.64	2.05	4.91	3.02	8.60	11.07	0.56	1.98	2.43	2.58	9.07	11.12	95	4.36	A	A+	4.28	5.30	1732	1.01
	2.0+3.5+3.5	1.91	3.34	3.34	2.69	8.60	10.76	0.52	2.00	2.70	2.37	9.16	12.34	95	4.32	A	A+	4.18	5.30	1772	1.05
	2.0+3.5+4.2	1.77	3.10	3.72	2.69	8.60	10.76	0.52	1.99	2.69	2.37	9.11	12.29	95	4.33	A	A+	4.20	5.30	1765	1.04
	2.0+3.5+5.0	1.64	2.87	4.10	3.00	8.60	11.11	0.58	1.98	2.82	2.67	9.07	12.88	95	4.36	A	A+	4.28	5.30	1732	1.01
	2.0+4.2+4.2	1.65	3.47	3.47	2.69	8.60	10.77	0.52	1.97	2.69	2.37	9.02	12.29	95	4.38	A	A+	4.32	5.30	1716	0.99
	2.5+2.5+2.5	2.87	2.87	2.87	2.31	8.60	10.65	0.45	1.99	2.64	2.06	9.11	12.08	95	4.32	A	A+	4.12	5.30	1800	1.08
	2.5+2.5+3.5	2.53	2.53	3.54	2.50	8.60	10.87	0.48	1.99	2.72	2.19	9.11	12.46	95	4.34	A	A+	4.16	5.30	1782	1.06
	2.5+2.5+4.2	2.34	2.34	3.93	2.50	8.60	10.88	0.48	1.97	2.72	2.19	9.02	12.46	95	4.37	A	A+	4.18	5.30	1775	1.05
	2.5+2.5+5.0	2.15	2.15	4.30	2.91	8.60	11.07	0.58	1.96	2.78	2.67	8.98	12.72	95	4.41	A	A+	4.26	5.30	1742	1.02
	2.5+2.5+6.0	1.95	1.95	4.69	3.12	8.60	11.08	0.58	1.94	2.43	2.67	8.88	11.12	95	4.45	A	A+	4.30	5.30	1726	1.00
	2.5+3.5+3.5	2.26	3.17	3.17	2.78	8.60	11.00	0.53	1.96	2.72	2.41	8.98	12.46	95	4.40	A	A+	4.20	5.30	1765	1.04
	2.5+3.5+4.2	2.11	2.95	3.54	2.79	8.60	11.01	0.53	1.96	2.71	2.41	8.98	12.42	95	4.41	A	A+	4.22	5.30	1758	1.04
	2.5+3.5+5.0	1.95	2.74	3.91	3.19	8.60	11.08	0.60	1.90	2.74	2.75	8.70	12.55	95	4.54	A	A+	4.30	5.30	1726	1.00
	2.5+4.2+4.2	1.97	3.31	3.31	2.79	8.60	11.01	0.53	1.95	2.71	2.41	8.93	12.42	95	4.42	A	A+	4.23	5.30	1752	1.03
	3.5+3.5+3.5	2.87	2.87	2.87	2.98	8.60	11.06	0.57	1.94	2.79	2.62	8.88	12.76	95	4.44	A	A+	4.24	5.30	1748	1.02

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
	1.5	1.60	---	---	---	1.57	1.60	2.49	0.40	0.42	0.59	1.82	1.98	2.71	95	---	---	---	---	---	---	---
	2.0	2.00	---	---	---	1.65	2.00	2.68	0.42	0.43	0.60	1.91	2.08	2.75	95	---	---	---	---	---	---	---
	2.5	2.50	---	---	---	1.74	2.50	3.44	0.44	0.44	0.82	2.00	2.62	3.77	95	---	---	---	---	---	---	---
	3.5	3.50	---	---	---	1.93	3.50	4.86	0.46	0.46	1.43	2.09	3.84	6.53	95	---	---	---	---	---	---	---
	4.2	---	---	4.20	---	1.93	4.20	5.33	0.46	0.46	1.44	2.09	3.93	6.57	95	---	---	---	---	---	---	---
	5.0	---	---	5.00	---	1.94	5.00	6.03	0.44	0.44	2.13	2.00	7.20	9.77	95	---	---	---	---	---	---	---
	6.0	---	---	6.00	---	1.94	6.00	6.51	0.44	0.44	2.13	2.00	7.29	9.77	95	---	---	---	---	---	---	---
	1.5+1.5	1.50	1.50	---	---	1.95	3.00	4.79	0.40	0.51	1.15	1.81	2.34	5.25	95	5.96	A	255	A++	7.29	3.0	144
	1.5+2.0	1.50	2.00	---	---	1.95	3.50	4.96	0.40	0.62	1.22	1.81	2.84	5.58	95	5.66	A	310	A++	7.53	3.5	163
	1.5+2.5	1.50	2.50	---	---	1.95	4.00	5.28	0.40	0.75	1.36	1.81	3.44	6.23	95	5.36	A	375	A++	7.75	4.0	181
	1.5+3.5	1.50	3.50	---	---	1.95	5.00	6.17	0.39	1.04	1.83	1.77	4.76	8.39	95	4.81	A	520	A++	7.8	5.0	225
	1.5+4.2	1.50	4.20	---	---	1.95	5.70	6.39	0.39	1.27	1.96	1.77	5.82	8.96	95	4.51	A	635	A++	7.84	5.7	255
	1.5+5.0	1.50	---	5.00	---	1.95	6.50	7.08	0.38	1.50	2.23	1.73	6.87	10.22	95	4.36	A	750	A++	7.86	6.5	290
	1.5+6.0	1.36	---	5.44	---	1.96	6.80	7.59	0.37	1.62	2.36	1.68	7.42	10.79	95	4.21	A	810	A++	7.81	6.8	305
	2.0+2.0	2.00	2.00	---	---	1.95	4.00	5.12	0.40	0.75	1.29	1.81	3.44	5.91	95	5.36	A	375	A++	7.75	4.0	181
	2.0+2.5	2.00	2.50	---	---	1.95	4.50	5.44	0.40	0.89	1.43	1.81	4.08	6.56	95	5.06	A	445	A++	7.8	4.5	202
	2.0+3.5	2.00	3.50	---	---	1.95	5.50	6.30	0.39	1.17	1.91	1.77	5.36	8.76	95	4.71	A	585	A++	7.91	5.5	244
	2.0+4.2	2.00	4.20	---	---	1.95	6.20	6.51	0.39	1.43	2.05	1.77	6.55	9.37	95	4.36	A	715	A++	7.88	6.2	276
	2.0+5.0	1.94	---	4.86	---	1.95	6.80	7.26	0.38	1.59	2.36	1.73	7.28	10.79	95	4.28	A	795	A++	7.78	6.8	306
	2.0+6.0	1.70	---	5.10	---	1.96	6.80	7.71	0.37	1.61	2.45	1.68	7.37	11.20	95	4.23	A	805	A++	7.71	6.8	309
	2.5+2.5	2.50	2.50	---	---	1.95	5.00	6.10	0.41	1.01	1.78	1.89	4.63	8.15	95	4.96	A	505	A++	7.81	5.0	224
	2.5+3.5	2.50	3.50	---	---	1.95	6.00	6.57	0.40	1.29	2.11	1.81	5.91	9.65	95	4.66	A	645	A++	7.94	6.0	265
	2.5+4.2	2.50	4.20	---	---	1.95	6.70	6.95	0.40	1.51	2.38	1.81	6.92	10.88	95	4.46	A	755	A++	7.99	6.7	294
	2.5+5.0	2.27	---	4.53	---	1.95	6.80	7.37	0.37	1.50	2.45	1.68	6.87	11.20	95	4.56	A	750	A++	7.93	6.8	300
	2.5+6.0	2.00	---	4.80	---	1.96	6.80	7.71	0.35	1.48	2.45	1.60	6.78	11.20	95	4.61	A	740	A++	7.9	6.8	301
	3.5+3.5	3.40	3.40	---	---	1.95	6.80	7.13	0.38	1.45	2.37	1.73	6.64	10.83	95	4.7	A	725	A++	8.02	6.8	297
	3.5+4.2	3.09	3.71	---	---	1.95	6.80	7.24	0.38	1.45	2.46	1.73	6.64	11.24	95	4.72	A	725	A++	8	6.8	298
	3.5+5.0	2.80	---	4.00	---	1.95	6.80	7.76	0.35	1.42	2.78	1.60	6.50	12.71	95	4.82	A	710	A++	7.92	6.8	301
	3.5+6.0	2.51	---	4.29	---	2.26	6.80	8.07	0.40	1.40	2.72	1.81	6.41	12.46	95	4.87	A	700	A++	7.89	6.8	302
	4.2+4.2	3.40	3.40	---	---	1.95	6.80	7.14	0.38	1.44	2.37	1.73	6.60	10.83	95	4.74	A	720	A++	7.98	6.8	298
	4.2+5.0	3.10	---	3.70	---	1.95	6.80	7.77	0.35	1.41	2.78	1.60	6.46	12.71	95	4.84	A	705	A++	7.9	6.8	302
	4.2+6.0	2.80	---	4.00	---	2.26	6.80	8.08	0.40	1.40	2.72	1.81	6.41	12.46	95	4.89	A	700	A++	7.87	6.8	303
4MXM68N2V1B	5.0+5.0	---	---	3.40	3.40	2.34	6.80	8.22	0.43	1.38	2.98	1.98	6.32	13.65	95	4.94	A	690	A++	7.88	6.8	302
	5.0+6.0	---	---	3.09	3.71	2.47	6.80	8.45	0.44	1.37	2.92	2.02	6.28	13.36	95	4.99	A	685	A++	7.85	6.8	304
	1.5+1.5+1.5	1.50	1.50	1.50	---	1.96	4.50	6.40	0.39	0.61	1.57	1.77	2.80	7.17	95	7.46	A	305	A+++	8.54	4.5	185
	1.5+1.5+2.0	1.44	1.44	1.92	---	1.96	4.80	6.56	0.39	0.70	1.65	1.77	3.21	7.54	95	6.86	A	350	A+++	8.52	4.8	198
	1.5+1.5+2.5	1.36	1.36	2.27	---	1.96	5.00	6.72	0.39	0.80	1.73	1.77	3.67	7.90	95	6.26	A	400	A+++	8.5	5.0	206
	1.5+1.5+3.5	1.50	1.50	3.50	---	1.96	6.50	7.11	0.38	1.56	1.92	1.73	7.14	8.80	95	4.19	A	780	A++	7.85	6.5	290
	1.5+1.5+4.2	1.42	1.42	3.97	---	1.96	6.80	7.33	0.38	1.80	2.05	1.73	8.24	9.37	95	3.79	A	900	A++	7.71	6.8	309
	1.5+1.5+5.0	1.28	1.28	4.25	---	1.96	6.80	7.74	0.36	1.75	2.22	1.64	8.01	10.14	95	3.89	A	875	A++	7.64	6.8	312
	1.5+1.5+6.0	1.13	1.13	4.53	---	2.31	6.80	7.99	0.40	1.73	2.17	1.85	7.92	9.94	95	3.94	A	865	A++	7.62	6.8	313
	1.5+2.0+2.0	1.50	2.00	2.00	---	1.96	5.50	6.48	0.39	1.01	1.61	1.77	4.63	7.37	95	5.46	A	505	A++	8.17	5.5	236
	1.5+2.0+2.5	1.50	2.00	2.50	---	1.96	6.00	6.87	0.39	1.32	1.81	1.77	6.05	8.27	95	4.56	A	660	A++	7.9	6.0	266
	1.5+2.0+3.5	1.46	1.94	3.40	---	1.96	6.80	7.25	0.38	1.80	2.01	1.73	8.24	9.21	95	3.79	A	900	A++	7.71	6.8	309
	1.5+2.0+4.2	1.32	1.77	3.71	---	1.96	6.80	7.47	0.38	1.79	2.14	1.73	8.20	9.78	95	3.81	A	895	A++	7.69	6.8	310
	1.5+2.0+5.0	1.20	1.60	4.00	---	1.96	6.80	7.87	0.36	1.74	2.31	1.64	7.97	10.55	95	3.91	A	870	A++	7.63	6.8	312
	1.5+2.0+6.0	1.07	1.43	4.29	---	2.31	6.80	8.13	0.40	1.72	2.26	1.85	7.88	10.35	95	3.96	A	860	A++	7.6	6.8	313
	1.5+2.5+2.5	1.50	2.50	2.50	---	1.96	6.50	7.10	0.38	1.63	1.92	1.73	7.46	8.80	95	4.01	A	815	A++	7.76	6.5	294
	1.5+2.5+3.5	1.36	2.27	3.17	---	1.96	6.80	7.60	0.36	1.79	2.23	1.64	8.20	10.18	95	3.81	A	895	A++	7.69	6.8	310
	1.5+2.5+4.2	1.24	2.07	3.48	---	1.96	6.80	7.81	0.36	1.78	2.35	1.64	8.15	10.75	95	3.83	A	890	A++	7.67	6.8	310
	1.5+2.5+5.0	1.13	1.89	3.78	---	1.96	6.80	7.95	0.36	1.74	2.35	1.64	7.97	10.75	95	3.93	A	870	A++	7.61	6.8	313
	1.5+2.5+6.0	1.02	1.70	4.08	---	2.31	6.80	8.42	0.41	1.71	2.44	1.89	7.83	11.16	95	3.98	A	855	A++	7.59	6.8	314
	1.5+3.5+3.5	1.20	2.80	2.80	---	1.96	6.80	7.94	0.37	1.77	2.45	1.68	8.11	11.20	95	3.85	A	885	A++	7.67	6.8	311
	1.5+3.5+4.2	1.11	2.59	3.10	---	1.96	6.80	8.13	0.37	1.76	2.58	1.68	8.06	11.81	95	3.87	A	880	A++	7.65	6.8	311
	1.5+3.5+5.0	1.02	2.38	3.40	---	1.96	6.80	8.46	0.33	1.72	2.72	1.52	7.88	12.46	95	3.97	A	860	A++	7.58	6.8	314
	1.5+3.5+6.0	0.93	2.16	3.71	---	2.31	6.80	8.56	0.41	1.70	2.53	1.89	7.79	11.57	95	4.02	A	850	A++	7.56	6.8	315
	1.5+4.2+4.2	1.03	2.88	2.88	---	1.96	6.80	8.26	0.37	1.75	2.68	1.68	8.01	12.26	95	3.89	A	875	A++	7.63	6.8	312
	1.5+4.2+5.0	0.95	2.67	3.18	---	1.96	6.80	8.53	0.33	1.71	2.77	1.52	7.83	12.67	95	3.99	A	855	A++	7.56	6.8	315
	2.0+2.0+2.0	2.00	2.00	2.00	---	1.96	6.00	6.64	0.39	1.34	1.68	1.77	6.14	7.70	95	4.51	A	670	A++	7.84	6.0	268
	2.0+2.0+2.5	2.00	2.00	2.50	---	1.96	6.50	7.03	0.39	1.63	1.89	1.77	7.46	8.64	95	4.01	A	815	A++	7.76	6.5	294
	2.0+2.0+3.5	1.81	1.81	3.17	---	1.96	6.80	7.40	0.38	1.79	2.09	1.73	8.20	9.57	95	3.81	A	895	A++	7.69	6.8	310
	2.0+2.0+4.2	1.66	1.66	3.48	---	1.96	6.80	7.61	0.38	1.78	2.23	1.73	8.15	10.18	95	3.83	A	890	A++	7.67	6.8	310
	2.0+2.0+5.0	1.51	1.51	3.78	---	1.96	6.80	8.01	0.36	1.74	2.39	1.64	7.97	10.96	95	3.93	A	870	A++	7.61	6.8	313
	2.0+2.0+6.0	1.36	1.36	4.08	---	2.31	6.80	8.27	0.40	1.71	2.35	1.85	7.83	10.75	95	3.98	A	855	A++	7.59	6.8	314
	2.0+2.5+2.5	1.94	2.43	2.43	---	1.96	6.80	7.24	0.38	1.77	2.01	1.73	8.11	9.21	95	3.85	A	885	A++	7.71	6.8	309

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
4MXM68N2V1B	2.0+2.5+3.5	1.70	2.13	2.98	---	1.96	6.80	7.74	0.36	1.76	2.31	1.64	8.06	10.55	95	3.87	A	880	A++	7.69	6.8	310
	2.0+2.5+4.2	1.56	1.95	3.28	---	1.96	6.80	7.94	0.36	1.75	2.45	1.64	8.01	11.20	95	3.89	A	875	A++	7.68	6.8	310
	2.0+2.5+5.0	1.43	1.79	3.58	---	1.96	6.80	8.08	0.36	1.71	2.44	1.64	7.83	11.16	95	3.99	A	855	A++	7.61	6.8	313
	2.0+2.5+6.0	1.30	1.62	3.89	---	2.31	6.80	8.55	0.41	1.69	2.53	1.89	7.74	11.57	95	4.04	A	845	A++	7.58	6.8	314
	2.0+3.5+3.5	1.51	2.64	2.64	---	1.96	6.80	8.07	0.37	1.74	2.54	1.68	7.97	11.61	95	3.91	A	870	A++	7.67	6.8	311
	2.0+3.5+4.2	1.40	2.45	2.94	---	1.96	6.80	8.25	0.37	1.74	2.68	1.68	7.97	12.26	95	3.93	A	870	A++	7.65	6.8	311
	2.0+3.5+5.0	1.30	2.27	3.24	---	2.28	6.80	8.58	0.40	1.69	2.82	1.85	7.74	12.91	95	4.03	A	845	A++	7.58	6.8	314
	2.0+4.2+4.2	1.31	2.75	2.75	---	1.96	6.80	8.37	0.37	1.73	2.77	1.68	7.92	12.67	95	3.95	A	865	A++	7.63	6.8	312
	2.5+2.5+2.5	2.27	2.27	2.27	---	1.96	6.80	7.53	0.38	1.76	2.18	1.73	8.06	9.98	95	3.87	A	880	A++	7.7	6.8	310
	2.5+2.5+3.5	2.00	2.00	2.80	---	1.96	6.80	7.94	0.36	1.72	2.45	1.64	7.88	11.20	95	3.97	A	860	A++	7.62	6.8	313
	2.5+2.5+4.2	1.85	1.85	3.10	---	1.96	6.80	8.12	0.36	1.71	2.58	1.64	7.83	11.81	95	3.99	A	855	A++	7.6	6.8	313
	2.5+2.5+5.0	1.70	1.70	3.40	---	2.28	6.80	8.45	0.40	1.67	2.72	1.85	7.65	12.46	95	4.09	A	835	A++	7.53	6.8	316
	2.5+2.5+6.0	1.55	1.55	3.71	---	2.42	6.80	8.74	0.40	1.65	2.67	1.85	7.56	12.22	95	4.14	A	825	A++	7.51	6.8	317
	2.5+3.5+3.5	1.79	2.51	2.51	---	2.27	6.80	8.30	0.40	1.70	2.72	1.85	7.79	12.46	95	4.01	A	850	A++	7.59	6.8	314
	2.5+3.5+4.2	1.67	2.33	2.80	---	2.27	6.80	8.43	0.40	1.69	2.82	1.85	7.74	12.91	95	4.03	A	845	A++	7.58	6.8	314
	2.5+3.5+5.0	1.55	2.16	3.09	---	2.48	6.80	8.74	0.42	1.65	2.96	1.94	7.56	13.56	95	4.13	A	825	A++	7.5	6.8	317
	2.5+4.2+4.2	1.56	2.62	2.62	---	2.27	6.80	8.49	0.40	1.68	2.87	1.85	7.69	13.12	95	4.05	A	840	A++	7.56	6.8	315
	3.5+3.5+3.5	2.27	2.27	2.27	---	2.38	6.80	8.59	0.40	1.68	2.96	1.81	7.69	13.56	95	4.05	A	840	A++	7.57	6.8	315
	1.5+1.5+1.5+1.5	1.65	1.65	1.65	1.65	1.97	6.60	7.09	0.38	1.38	1.63	1.73	6.32	7.45	95	4.79	A	690	A+++	8.54	6.6	271
	1.5+1.5+1.5+2.0	1.52	1.52	1.52	2.03	1.97	6.60	7.27	0.38	1.37	1.70	1.73	6.28	7.78	95	4.85	A	685	A+++	8.52	6.6	271
	1.5+1.5+1.5+2.5	1.41	1.41	1.41	2.36	1.97	6.60	7.45	0.36	1.35	1.78	1.64	6.18	8.15	95	4.91	A	675	A+++	8.5	6.6	272
	1.5+1.5+1.5+3.5	1.28	1.28	1.28	2.98	1.97	6.80	7.87	0.37	1.58	1.99	1.68	7.24	9.12	95	4.31	A	790	A++	8.03	6.8	297
	1.5+1.5+1.5+4.2	1.17	1.17	1.17	3.28	1.97	6.80	8.04	0.37	1.58	2.07	1.68	7.24	9.49	95	4.33	A	790	A++	8.01	6.8	297
	1.5+1.5+1.5+5.0	1.07	1.07	1.07	3.58	2.45	6.80	8.48	0.42	1.54	2.32	1.94	7.05	10.63	95	4.43	A	770	A++	7.94	6.8	300
	1.5+1.5+1.5+6.0	0.97	0.97	0.97	3.89	2.48	6.80	8.38	0.40	1.52	2.08	1.81	6.96	9.53	95	4.48	A	760	A++	7.91	6.8	301
	1.5+1.5+2.0+2.0	1.46	1.46	1.94	1.94	1.97	6.80	7.45	0.38	1.60	1.78	1.73	7.33	8.15	95	4.27	A	800	A++	8.06	6.8	296
	1.5+1.5+2.0+2.5	1.36	1.36	1.81	2.27	1.97	6.80	7.62	0.36	1.58	1.87	1.64	7.24	8.55	95	4.31	A	790	A++	8.05	6.8	296
	1.5+1.5+2.0+3.5	1.20	1.20	1.60	2.80	1.97	6.80	8.03	0.37	1.57	2.07	1.68	7.19	9.49	95	4.35	A	785	A++	8.02	6.8	297
	1.5+1.5+2.0+4.2	1.11	1.11	1.48	3.10	1.97	6.80	8.19	0.37	1.56	2.16	1.68	7.14	9.90	95	4.37	A	780	A++	8.01	6.8	298
	1.5+1.5+2.0+5.0	1.02	1.02	1.36	3.40	2.45	6.80	8.63	0.42	1.53	2.41	1.94	7.01	11.04	95	4.47	A	765	A++	7.93	6.8	301
	1.5+1.5+2.0+6.0	0.93	0.93	1.24	3.71	2.48	6.80	8.56	0.40	1.51	2.18	1.81	6.92	9.98	95	4.52	A	755	A++	7.9	6.8	302
	1.5+1.5+2.5+2.5	1.28	1.28	2.13	2.13	1.97	6.80	7.70	0.36	1.58	1.90	1.64	7.24	8.72	95	4.33	A	790	A++	8.03	6.8	297
	1.5+1.5+2.5+3.5	1.13	1.13	1.89	2.64	2.32	6.80	8.11	0.46	1.56	2.12	2.11	7.14	9.69	95	4.37	A	780	A++	8.01	6.8	298
	1.5+1.5+2.5+4.2	1.05	1.05	1.75	2.94	2.32	6.80	8.27	0.46	1.55	2.21	2.11	7.10	10.10	95	4.39	A	775	A++	7.99	6.8	298
	1.5+1.5+2.5+5.0	0.97	0.97	1.62	3.24	2.45	6.80	8.70	0.42	1.52	2.46	1.94	6.96	11.24	95	4.49	A	760	A++	7.91	6.8	301
	1.5+1.5+3.5+3.5	1.02	1.02	2.38	2.38	2.32	6.80	8.57	0.46	1.55	2.39	2.11	7.10	10.92	95	4.41	A	775	A++	7.98	6.8	299
	1.5+1.5+3.5+4.2	0.95	0.95	2.22	2.67	2.44	6.80	8.65	0.50	1.54	2.44	2.27	7.05	11.16	95	4.43	A	770	A++	7.96	6.8	299
	1.5+2.0+2.0+2.0	1.36	1.81	1.81	1.81	1.97	6.80	7.61	0.38	1.59	1.87	1.73	7.28	8.55	95	4.29	A	795	A++	8.04	6.8	296
	1.5+2.0+2.0+2.5	1.28	1.70	1.70	2.13	1.97	6.80	7.78	0.36	1.58	1.95	1.64	7.24	8.92	95	4.31	A	790	A++	8.02	6.8	297
	1.5+2.0+2.0+3.5	1.13	1.51	1.51	2.64	2.32	6.80	8.18	0.46	1.57	2.16	2.11	7.19	9.90	95	4.35	A	785	A++	8	6.8	298
	1.5+2.0+2.0+4.2	1.05	1.40	1.40	2.94	2.32	6.80	8.34	0.46	1.56	2.25	2.11	7.14	10.31	95	4.37	A	780	A++	7.98	6.8	299
	1.5+2.0+2.0+5.0	0.97	1.30	1.30	3.24	2.45	6.80	8.77	0.42	1.53	2.51	1.94	7.01	11.49	95	4.47	A	765	A++	7.9	6.8	302
	1.5+2.0+2.5+2.5	1.20	1.60	2.00	2.00	1.97	6.80	7.86	0.36	1.58	1.99	1.64	7.24	9.12	95	4.33	A	790	A++	8.01	6.8	298
	1.5+2.0+2.5+3.5	1.07	1.43	1.79	2.51	2.32	6.80	8.26	0.46	1.56	2.21	2.11	7.14	10.10	95	4.37	A	780	A++	7.98	6.8	299
	1.5+2.0+2.5+4.2	1.00	1.33	1.67	2.80	2.32	6.80	8.43	0.46	1.55	2.30	2.11	7.10	10.51	95	4.39	A	775	A++	7.96	6.8	299
	1.5+2.0+2.5+5.0	0.93	1.24	1.55	3.09	2.45	6.80	8.85	0.42	1.52	2.55	1.94	6.96	11.69	95	4.49	A	760	A++	7.88	6.8	302
	1.5+2.0+3.5+3.5	0.97	1.30	2.27	2.27	1.98	6.80	8.64	0.37	1.55	2.44	1.68	7.10	11.16	95	4.41	A	775	A++	7.95	6.8	300
	1.5+2.5+2.5+2.5	1.13	1.89	1.89	1.89	1.97	6.80	8.18	0.33	1.57	2.16	1.52	7.19	9.90	95	4.35	A	785	A++	7.99	6.8	298
	1.5+2.5+2.5+3.5	1.02	1.70	1.70	2.38	2.32	6.80	8.49	0.40	1.55	2.34	1.81	7.10	10.71	95	4.39	A	775	A++	7.96	6.8	299
	1.5+2.5+2.5+4.2	0.95	1.59	1.59	2.67	2.32	6.80	8.50	0.41	1.55	2.34	1.89	7.10	10.71	95	4.41	A	775	A++	7.94	6.8	300
	1.5+2.5+3.5+3.5	0.93	1.55	2.16	2.16	2.32	6.80	8.71	0.40	1.54	2.48	1.81	7.05	11.36	95	4.43	A	770	A++	7.93	6.8	300
	2.0+2.0+2.0+2.0	1.70	1.70	1.70	1.70	1.97	6.80	7.78	0.38	1.58	1.95	1.73	7.24	8.92	95	4.31	A	790	A++	8.03	6.8	297
	2.0+2.0+2.0+2.5	1.60	1.60	1.60	2.00	1.97	6.80	7.95	0.36	1.58	2.04	1.64	7.24	9.33	95	4.33	A	790	A++	8.01	6.8	297
	2.0+2.0+2.0+3.5	1.43	1.43	1.43	2.51	1.97	6.80	8.33	0.37	1.56	2.25	1.68	7.14	10.31	95	4.37	A	780	A++	7.98	6.8	298
	2.0+2.0+2.0+4.2	1.33	1.33	1.33	2.80	1.97	6.80	8.49	0.37	1.55	2.34	1.68	7.10	10.71	95	4.39	A	775	A++	7.97	6.8	299
	2.0+2.0+2.0+5.0	1.24	1.24	1.24	3.09	2.45	6.80	8.91	0.42	1.52	2.61	1.94	6.96	11.93	95	4.49	A	760	A++	7.88	6.8	302
	2.0+2.0+2.5+2.5	1.51	1.51	1.89	1.89	1.97	6.80	8.10	0.37	1.57	2.12	1.68	7.19	9.69	95	4.35	A	785	A++	7.99	6.8	298
	2.0+2.0+2.5+3.5	1.36	1.36	1.70	2.38	2.32	6.80	8.49	0.41	1.55	2.34	1.89	7.10	10.71	95	4.39	A	775	A++	7.97	6.8	299
	2.0+2.0+2.5+4.2	1.27	1.27	1.59	2.67	2.32	6.80	8.64	0.41	1.55	2.44	1.89	7.10	11.16	95	4.41	A	775	A++	7.95	6.8	300
	2.0+2.0+3.5+3.5	1.24	1.24	2.16	2.16	2.44	6.80	8.78	0.41	1.55	2.53	1.89	7.10	11.57	95	4.41	A	775	A++	7.95	6.8	300
	2.0+2.5+2.5+2.5	1.43	1.79	1.79	1.79	1.97	6.80	8.33	0.37	1.56	2.25	1.68	7.14	10.31	95	4.37	A	780	A++	7.97	6.8	299
	2.0+2.5+2.5+3.5	1.30	1.62	1.62	2.27	2.32	6.80	8.63	0.41	1.55	2.44	1.89	7.10	11.16	95	4.41	A	775	A++	7.95	6.8	300
	2.5+2.5+2.5+2.5	1.70	1.70	1.70	1.70	2.32	6.80	8.56	0.42	1.55	2.39	1.94	7.10	10.92	95	4.39	A	775	A++	7.96	6.8	299
	2.5+2.5+2.5+3.5	1.55	1.55	1.55	2.16	2.44	6.80	8.90	0.42	1.54	2.63	1.94	7.05	12.02	95	4.43	A	770	A++	7.93	6.8	300

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
	1.5	2.70	---	---	---	1.47	2.70	4.08	0.42	0.73	1.22	1.91	3.35	5.58	95	---	---	---	---	---	---	---
	2.0	2.72	---	---	---	1.48	2.72	4.09	0.43	0.74	1.28	1.95	3.39	5.86	95	---	---	---	---	---	---	---
	2.5	3.40	---	---	---	1.44	3.40	4.30	0.42	1.03	1.37	1.91	4.72	6.27	95	---	---	---	---	---	---	---
	3.5	4.30	---	---	---	1.45	4.30	4.90	0.40	1.42	1.75	1.82	6.50	8.01	95	---	---	---	---	---	---	---
	4.2	---	---	4.32	---	1.44	4.32	5.70	0.40	1.41	2.04	1.82	6.46	9.34	95	---	---	---	---	---	---	---
	5.0	---	---	5.60	---	1.66	5.60	6.90	0.39	1.84	2.59	1.78	8.43	11.85	95	---	---	---	---	---	---	---
	6.0	---	---	7.90	---	1.88	7.90	8.91	0.37	2.65	2.64	1.69	12.13	12.08	95	---	---	---	---	---	---	---
	1.5+1.5	2.65	2.65	---	---	1.65	5.30	7.38	0.36	1.19	1.83	1.63	5.45	8.38	95	4.45	A	A	3.85	3.80	1380	0.73
	1.5+2.0	2.44	3.26	---	---	1.65	5.70	7.76	0.36	1.31	1.99	1.63	6.00	9.09	95	4.35	A	A	3.85	3.80	1380	0.72
	1.5+2.5	2.29	3.81	---	---	1.65	6.10	7.95	0.36	1.43	2.06	1.63	6.55	9.43	95	4.27	A	A	3.87	3.80	1373	0.71
	1.5+3.5	2.07	4.83	---	---	1.80	6.90	8.50	0.37	1.69	2.35	1.68	7.74	10.74	95	4.10	A	A	3.86	4.30	1558	0.92
	1.5+4.2	1.97	---	5.53	---	1.80	7.50	8.85	0.37	1.90	2.57	1.68	8.70	11.75	95	3.97	A	A	3.88	4.30	1548	0.91
	1.5+5.0	1.89	---	6.31	---	2.18	8.20	10.38	0.45	2.13	2.91	2.06	9.75	13.31	95	3.86	A	A	3.87	4.50	1628	0.96
	1.5+6.0	1.72	---	6.88	---	2.46	8.60	10.58	0.48	2.28	2.67	2.19	10.44	12.21	95	3.78	A	A	3.91	4.80	1717	1.07
	2.0+2.0	3.25	3.25	---	---	1.65	6.50	7.95	0.36	1.37	2.31	1.63	6.28	10.57	95	4.75	A	A	3.91	3.80	1361	0.71
	2.0+2.5	3.07	3.83	---	---	1.65	6.90	8.12	0.36	1.52	2.32	1.63	6.96	10.62	95	4.56	A	A	3.92	3.80	1354	0.71
	2.0+3.5	2.73	4.77	---	---	1.80	7.50	8.67	0.37	1.75	2.43	1.68	8.01	11.12	95	4.30	A	A	3.86	4.30	1558	0.91
	2.0+4.2	2.58	---	5.42	---	1.80	8.00	9.03	0.37	1.98	2.66	1.68	9.07	12.17	95	4.06	A	A	3.88	4.30	1550	0.9
	2.0+5.0	2.46	---	6.14	---	2.18	8.60	10.56	0.45	2.26	3.00	2.06	10.35	13.73	95	3.82	A	A	3.90	4.50	1612	0.96
	2.0+6.0	2.15	---	6.45	---	2.46	8.60	10.75	0.48	2.24	2.74	2.19	10.26	12.55	95	3.84	A	A	3.93	4.80	1710	1.07
	2.5+2.5	3.60	3.60	---	---	1.65	7.20	8.49	0.36	1.62	2.36	1.63	7.42	10.78	95	4.46	A	A	3.85	4.00	1455	0.79
	2.5+3.5	3.29	4.61	---	---	1.89	7.90	9.03	0.38	1.91	2.66	1.72	8.75	12.17	95	4.14	A	A	3.83	4.30	1569	0.9
	2.5+4.2	3.10	---	5.20	---	1.89	8.30	9.29	0.38	2.11	2.82	1.72	9.66	12.93	95	3.95	A	A	3.86	4.30	1559	0.9
	2.5+5.0	2.87	---	5.73	---	2.27	8.60	10.68	0.46	2.24	3.09	2.11	10.26	14.15	95	3.86	A	A	3.84	4.50	1637	0.91
	2.5+6.0	2.53	---	6.07	---	2.55	8.60	10.88	0.50	2.22	2.77	2.28	10.17	12.67	95	3.88	A	A	3.91	4.80	1716	1
	3.5+3.5	4.30	4.30	---	---	2.17	8.60	9.38	0.42	2.26	2.86	1.94	10.35	13.09	95	3.81	A	A+	4.00	4.80	1680	1.07
	3.5+4.2	3.91	---	4.69	---	2.17	8.60	9.47	0.42	2.26	2.91	1.94	10.35	13.31	95	3.82	A	A+	4.01	4.80	1675	1.06
	3.5+5.0	3.54	---	5.06	---	2.56	8.60	10.90	0.51	2.22	3.13	2.32	10.17	14.32	95	3.88	A	A+	4.01	4.80	1675	1.03
	3.5+6.0	3.17	---	5.43	---	2.74	8.60	11.01	0.52	2.21	2.76	2.37	10.12	12.63	95	3.91	A	A+	4.06	4.80	1652	1.01
	4.2+4.2	---	---	4.30	4.30	2.17	8.60	9.56	0.42	2.22	2.94	1.94	10.17	13.47	95	3.88	A	A+	4.00	4.80	1679	1.04
	4.2+5.0	---	---	3.93	4.67	2.56	8.60	10.91	0.51	2.21	3.19	2.32	10.12	14.61	95	3.90	A	A	3.93	5.20	1851	1.2
	4.2+6.0	---	---	3.54	5.06	2.74	8.60	11.02	0.51	2.20	2.79	2.32	10.07	12.76	95	3.92	A	A+	4.03	5.20	1804	1.18
4MXM68N2V1B	5.0+5.0	---	---	4.30	4.30	2.94	8.60	11.10	0.59	2.17	3.11	2.71	9.94	14.23	95	3.98	A	A+	4.06	5.20	1793	1.15
	5.0+6.0	---	---	3.91	4.69	3.14	8.60	11.10	0.60	2.15	2.72	2.75	9.84	12.46	95	4.01	A	A+	4.09	5.20	1779	1.13
	1.5+1.5+1.5	2.17	2.17	2.17	---	2.01	6.50	9.92	0.41	1.33	2.26	1.89	6.09	10.36	95	4.91	A	A+	4.07	5.30	1822	1.11
	1.5+1.5+2.0	2.07	2.07	2.76	---	2.01	6.90	10.10	0.41	1.46	2.34	1.89	6.69	10.69	95	4.74	A	A+	4.08	5.30	1817	1.1
	1.5+1.5+2.5	2.02	2.02	3.36	---	2.10	7.40	10.18	0.42	1.64	2.37	1.94	7.51	10.86	95	4.53	A	A+	4.09	5.30	1810	1.09
	1.5+1.5+3.5	1.89	1.89	4.42	---	2.31	8.20	10.29	0.44	1.87	2.49	2.02	8.56	11.41	95	4.39	A	A+	4.14	5.30	1793	1.07
	1.5+1.5+4.2	1.79	1.79	5.02	---	2.31	8.60	10.29	0.44	2.03	2.49	2.02	9.30	11.41	95	4.25	A	A+	4.15	5.30	1786	1.07
	1.5+1.5+5.0	1.61	1.61	5.38	---	2.71	8.60	10.46	0.55	2.01	2.57	2.50	9.20	11.75	95	4.29	A	A+	4.23	5.30	1752	1.03
	1.5+1.5+6.0	1.43	1.43	5.73	---	2.93	8.60	10.59	0.55	1.99	2.31	2.50	9.11	10.57	95	4.33	A	A+	4.27	5.30	1735	1.01
	1.5+2.0+2.0	2.35	3.13	3.13	---	2.01	8.60	10.26	0.41	2.05	2.41	1.89	9.39	11.03	95	4.21	A	A+	4.09	5.30	1814	1.1
	1.5+2.0+2.5	2.15	2.87	3.58	---	2.10	8.60	10.36	0.42	2.04	2.44	1.94	9.34	11.16	95	4.23	A	A+	4.10	5.30	1807	1.09
	1.5+2.0+3.5	1.84	2.46	4.30	---	2.31	8.60	10.45	0.44	2.02	2.58	2.02	9.25	11.79	95	4.26	A	A+	4.14	5.30	1793	1.07
	1.5+2.0+4.2	1.68	2.23	4.69	---	2.31	8.60	10.46	0.44	2.01	2.57	2.02	9.20	11.75	95	4.28	A	A+	4.15	5.30	1786	1.07
	1.5+2.0+5.0	1.52	2.02	5.06	---	2.71	8.60	10.88	0.55	2.00	2.64	2.50	9.16	12.08	95	4.32	A	A+	4.23	5.30	1752	1.03
	1.5+2.0+6.0	1.36	1.81	5.43	---	2.93	8.60	10.89	0.55	1.98	2.38	2.50	9.07	10.91	95	4.36	A	A+	4.27	5.30	1735	1.01
	1.5+2.5+2.5	1.98	3.31	3.31	---	2.20	8.60	10.47	0.45	2.03	2.44	2.06	9.30	11.16	95	4.25	A	A+	4.12	5.30	1800	1.08
	1.5+2.5+3.5	1.72	2.87	4.01	---	2.40	8.60	10.58	0.47	2.02	2.57	2.15	9.25	11.75	95	4.27	A	A+	4.16	5.30	1782	1.06
	1.5+2.5+4.2	1.57	2.62	4.40	---	2.41	8.60	10.58	0.47	2.00	2.57	2.15	9.16	11.75	95	4.30	A	A+	4.19	5.30	1768	1.05
	1.5+2.5+5.0	1.43	2.39	4.78	---	2.81	8.60	11.00	0.56	1.99	2.64	2.58	9.11	12.08	95	4.34	A	A+	4.27	5.30	1735	1.01
	1.5+2.5+6.0	1.29	2.15	5.16	---	3.02	8.60	11.00	0.57	1.97	2.38	2.62	9.02	10.91	95	4.38	A	A+	4.31	5.30	1719	0.99
	1.5+3.5+3.5	1.52	3.54	3.54	---	2.69	8.60	10.59	0.55	1.99	2.57	2.50	9.11	11.75	95	4.33	A	A+	4.20	5.30	1765	1.04
	1.5+3.5+4.2	1.40	3.27	3.93	---	2.69	8.60	10.59	0.55	1.98	2.56	2.50	9.07	11.71	95	4.35	A	A+	4.22	5.30	1755	1.03
	1.5+3.5+5.0	1.29	3.01	4.30	---	3.00	8.60	10.93	0.62	1.97	2.59	2.84	9.02	11.87	95	4.38	A	A+	4.30	5.30	1722	0.99
	1.5+3.5+6.0	1.17	2.74	4.69	---	2.93	8.60	10.93	0.55	1.96	2.37	2.50	8.98	10.86	95	4.40	A	A+	4.34	5.30	1707	0.98
	1.5+4.2+4.2	1.30	---	3.65	3.65	2.69	8.60	10.68	0.55	1.98	2.59	2.50	9.07	11.87	95	4.35	A	A+	4.24	5.30	1748	1.02
	1.5+4.2+5.0	1.21	---	3.38	4.02	3.00	8.60	10.99	0.62	1.96	2.67	2.84	8.98	12.21	95	4.39	A	A+	4.32	5.30	1716	0.99
	2.0+2.0+2.0	2.60	2.60	2.60	---	2.01	7.80	10.44	0.41	1.72	2.48	1.89	7.88	11.37	95	4.56	A	A+	4.07	5.30	1821	1.1
	2.0+2.0+2.5	2.52	2.52	3.15	---	2.10	8.20	10.52	0.42	1.83	2.52	1.94	8.38	11.54	95	4.49	A	A+	4.09	5.30	1814	1.1
	2.0+2.0+3.5	2.29	2.29	4.01	---	2.31	8.60	10.63	0.44	2.04	2.65	2.02	9.34	12.13	95	4.22	A	A+	4.13	5.30	1796	1.08
	2.0+2.0+4.2	2.10	2.10	4.40	---	2.31	8.60	10.63	0.44	2.02	2.65	2.02	9.25	12.13	95	4.26	A	A+	4.14	5.30	1789	1.07
	2.0+2.0+5.0	1.91	1.91	4.78	---	2.71	8.60	10.82	0.55	2.00	2.72	2.50	9.16	12.46	95	4.30	A	A+	4.22	5.30	1755	1.03
	2.0+2.0+6.0	1.72	1.72	5.16	---	2.93	8.60	10.95	0.55	1.99	2.46	2.50	9.11	11.24	95	4.32	A	A+	4.26	5.30	1739	1.01
	2.0+2.5+2.5	2.46	3.07	3.07	---	2.20	8.60	10.54	0.43	1.97	2.61	1.98	9.02	11.96	95	4.38	A	A+	4.10	5.30	1807	1.09

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
4MXM68N2V1B	2.0+2.5+3.5	2.15	2.69	3.76	---	2.40	8.60	10.63	0.46	2.02	2.65	2.11	9.25	12.13	95	4.27	A	A+	4.14	5.30	1789	1.07
	2.0+2.5+4.2	1.98	2.47	4.15	---	2.41	8.60	10.64	0.46	2.01	2.64	2.11	9.20	12.08	95	4.29	A	A+	4.16	5.30	1782	1.06
	2.0+2.5+5.0	1.81	2.26	4.53	---	2.81	8.60	11.06	0.56	1.98	2.75	2.58	9.07	12.59	95	4.34	A	A+	4.24	5.30	1748	1.02
	2.0+2.5+6.0	1.64	2.05	4.91	---	3.02	8.60	11.07	0.56	1.98	2.43	2.58	9.07	11.12	95	4.36	A	A+	4.28	5.30	1732	1.01
	2.0+3.5+3.5	1.91	3.34	3.34	---	2.69	8.60	10.76	0.52	2.00	2.70	2.37	9.16	12.34	95	4.32	A	A+	4.18	5.30	1772	1.05
	2.0+3.5+4.2	1.77	3.10	3.72	---	2.69	8.60	10.76	0.52	1.99	2.69	2.37	9.11	12.29	95	4.33	A	A+	4.20	5.30	1765	1.04
	2.0+3.5+5.0	1.64	2.87	4.10	---	3.00	8.60	11.11	0.58	1.98	2.82	2.67	9.07	12.88	95	4.36	A	A+	4.28	5.30	1732	1.01
	2.0+4.2+4.2	1.65	---	3.47	3.47	2.69	8.60	10.77	0.52	1.97	2.69	2.37	9.02	12.29	95	4.38	A	A+	4.32	5.30	1716	0.99
	2.5+2.5+2.5	2.87	2.87	2.87	---	2.31	8.60	10.65	0.45	1.99	2.64	2.06	9.11	12.08	95	4.32	A	A+	4.12	5.30	1800	1.08
	2.5+2.5+3.5	2.53	2.53	3.54	---	2.50	8.60	10.87	0.48	1.99	2.72	2.19	9.11	12.46	95	4.34	A	A+	4.16	5.30	1782	1.06
	2.5+2.5+4.2	2.34	2.34	3.93	---	2.50	8.60	10.88	0.48	1.97	2.72	2.19	9.02	12.46	95	4.37	A	A+	4.18	5.30	1775	1.05
	2.5+2.5+5.0	2.15	2.15	4.30	---	2.91	8.60	11.07	0.58	1.96	2.78	2.67	8.98	12.72	95	4.41	A	A+	4.26	5.30	1742	1.02
	2.5+2.5+6.0	1.95	1.95	4.69	---	3.12	8.60	11.08	0.58	1.94	2.43	2.67	8.88	11.12	95	4.45	A	A+	4.30	5.30	1726	1
	2.5+3.5+3.5	2.26	3.17	3.17	---	2.78	8.60	11.00	0.53	1.96	2.72	2.41	8.98	12.46	95	4.40	A	A+	4.20	5.30	1765	1.04
	2.5+3.5+4.2	2.11	2.95	3.54	---	2.79	8.60	11.01	0.53	1.96	2.71	2.41	8.98	12.42	95	4.41	A	A+	4.22	5.30	1758	1.04
	2.5+3.5+5.0	1.95	2.74	3.91	---	3.19	8.60	11.08	0.60	1.90	2.74	2.75	8.70	12.55	95	4.54	A	A+	4.30	5.30	1726	1
	2.5+4.2+4.2	1.97	---	3.31	3.31	2.79	8.60	11.01	0.53	1.95	2.71	2.41	8.93	12.42	95	4.42	A	A+	4.23	5.30	1752	1.03
	3.5+3.5+3.5	2.87	2.87	2.87	---	2.98	8.60	11.06	0.57	1.94	2.79	2.62	8.88	12.76	95	4.44	A	A+	4.24	5.30	1748	1.02
	1.5+1.5+1.5+1.5	1.95	1.95	1.95	1.95	2.47	7.80	10.07	0.49	1.62	2.12	2.24	7.42	9.68	95	4.82	A	A+	4.18	5.80	1942	1.15
	1.5+1.5+1.5+2.0	1.89	1.89	1.89	2.52	2.47	8.20	10.25	0.49	1.77	2.19	2.24	8.11	10.02	95	4.65	A	A+	4.19	5.80	1937	1.15
	1.5+1.5+1.5+2.5	1.84	1.84	1.84	3.07	2.57	8.60	10.36	0.50	1.88	2.20	2.28	8.61	10.07	95	4.59	A	A+	4.19	5.80	1934	1.14
	1.5+1.5+1.5+3.5	1.61	1.61	1.61	3.76	2.77	8.60	10.46	0.54	1.84	2.21	2.45	8.43	10.11	95	4.68	A	A+	4.24	5.80	1915	1.13
	1.5+1.5+1.5+4.2	1.48	1.48	1.48	4.15	2.78	8.60	10.46	0.53	1.84	2.20	2.41	8.43	10.06	95	4.70	A	A+	4.27	5.80	1901	1.12
	1.5+1.5+1.5+5.0	1.36	1.36	1.36	4.53	3.10	8.60	10.52	0.59	1.83	2.13	2.71	8.38	9.73	95	4.71	A	A+	4.28	5.80	1896	1.08
	1.5+1.5+1.5+6.0	1.23	1.23	1.23	4.91	3.04	8.60	10.88	0.45	1.79	1.98	2.06	8.20	9.05	95	4.81	A	A+	4.38	5.80	1854	1.06
	1.5+1.5+2.0+2.0	1.84	1.84	2.46	2.46	2.47	8.60	10.44	0.49	1.87	2.26	2.24	8.56	10.36	95	4.60	A	A+	4.20	5.80	1931	1.14
	1.5+1.5+2.0+2.5	1.72	1.72	2.29	2.87	2.57	8.60	10.54	0.50	1.87	2.27	2.28	8.56	10.39	95	4.62	A	A+	4.21	5.80	1926	1.13
	1.5+1.5+2.0+3.5	1.52	1.52	2.02	3.54	2.77	8.60	10.64	0.54	1.84	2.26	2.45	8.43	10.34	95	4.70	A	A+	4.28	5.80	1895	1.12
	1.5+1.5+2.0+4.2	1.40	1.40	1.87	3.93	2.78	8.60	10.65	0.53	1.82	2.25	2.41	8.33	10.30	95	4.74	A	A+	4.32	5.80	1877	1.11
	1.5+1.5+2.0+5.0	1.29	1.29	1.72	4.30	3.10	8.60	10.71	0.59	1.82	2.20	2.71	8.33	10.06	95	4.75	A	A+	4.34	5.80	1871	1.07
	1.5+1.5+2.0+6.0	1.17	1.17	1.56	4.69	3.04	8.60	11.07	0.45	1.78	2.04	2.06	8.15	9.35	95	4.85	A	A+	4.44	5.80	1829	1.05
	1.5+1.5+2.5+2.5	1.61	1.61	2.69	2.69	2.67	8.60	10.55	0.52	1.86	2.23	2.37	8.52	10.19	95	4.63	A	A+	4.22	5.80	1921	1.12
	1.5+1.5+2.5+3.5	1.43	1.43	2.39	3.34	2.98	8.60	10.65	0.59	1.82	2.27	2.71	8.33	10.40	95	4.74	A	A+	4.32	5.80	1878	1.11
	1.5+1.5+2.5+4.2	1.33	1.33	2.22	3.72	2.98	8.60	10.65	0.58	1.81	2.27	2.67	8.29	10.40	95	4.77	A	A+	4.34	5.80	1869	1.1
	1.5+1.5+2.5+5.0	1.23	1.23	2.05	4.10	3.10	8.60	10.90	0.59	1.80	2.25	2.71	8.24	10.30	95	4.80	A	A+	4.38	5.80	1852	1.06
	1.5+1.5+3.5+3.5	1.29	1.29	3.01	3.01	3.18	8.60	10.75	0.64	1.78	2.30	2.93	8.15	10.53	95	4.85	A	A+	4.45	5.80	1822	1.09
	1.5+1.5+3.5+4.2	1.21	1.21	2.81	3.38	2.99	8.60	10.85	0.58	1.78	2.34	2.67	8.15	10.69	95	4.86	A	A++	4.60	5.80	1765	1.09
	1.5+2.0+2.0+2.0	1.72	2.29	2.29	2.29	2.47	8.60	10.63	0.49	1.87	2.34	2.24	8.56	10.69	95	4.62	A	A+	4.21	5.80	1926	1.13
	1.5+2.0+2.0+2.5	1.61	2.15	2.15	2.69	2.57	8.60	10.72	0.50	1.86	2.35	2.28	8.52	10.76	95	4.63	A	A+	4.22	5.80	1921	1.12
	1.5+2.0+2.0+3.5	1.43	1.91	1.91	3.34	2.77	8.60	10.83	0.54	1.81	2.36	2.45	8.29	10.80	95	4.76	A	A+	4.32	5.80	1880	1.11
	1.5+2.0+2.0+4.2	1.33	1.77	1.77	3.72	2.78	8.60	10.84	0.53	1.80	2.35	2.41	8.24	10.74	95	4.78	A	A+	4.33	5.80	1872	1.1
	1.5+2.0+2.0+5.0	1.23	1.64	1.64	4.10	3.10	8.60	10.90	0.59	1.79	2.26	2.71	8.20	10.36	95	4.82	A	A+	4.36	5.80	1859	1.06
	1.5+2.0+2.5+2.5	1.52	2.02	2.53	2.53	2.67	8.60	10.72	0.52	1.86	2.29	2.37	8.52	10.48	95	4.65	A	A+	4.23	5.80	1917	1.12
	1.5+2.0+2.5+3.5	1.36	1.81	2.26	3.17	2.98	8.60	10.83	0.59	1.80	2.35	2.71	8.24	10.74	95	4.78	A	A+	4.34	5.80	1871	1.1
	1.5+2.0+2.5+4.2	1.26	1.69	2.11	3.54	2.98	8.60	10.84	0.58	1.80	2.35	2.67	8.24	10.74	95	4.80	A	A+	4.35	5.80	1864	1.09
	1.5+2.0+2.5+5.0	1.17	1.56	1.95	3.91	3.10	8.60	11.09	0.59	1.79	2.33	2.71	8.20	10.66	95	4.83	A	A+	4.38	5.80	1854	1.06
	1.5+2.0+3.5+3.5	1.23	1.64	2.87	2.87	3.18	8.60	10.93	0.64	1.78	2.37	2.93	8.15	10.86	95	4.84	A	A++	4.62	5.80	1757	1.09
	1.5+2.5+2.5+2.5	1.43	2.39	2.39	2.39	2.77	8.60	10.73	0.55	1.85	2.29	2.50	8.47	10.48	95	4.66	A	A+	4.24	5.80	1912	1.11
	1.5+2.5+2.5+3.5	1.29	2.15	2.15	3.01	3.08	8.60	10.92	0.62	1.79	2.38	2.84	8.20	10.91	95	4.81	A	A+	4.37	5.80	1858	1.09
	1.5+2.5+2.5+4.2	1.21	2.01	2.01	3.38	2.98	8.60	11.01	0.58	1.78	2.41	2.67	8.15	11.03	95	4.83	A	A+	4.39	5.80	1848	1.09
	1.5+2.5+3.5+3.5	1.17	1.95	2.74	2.74	3.18	8.60	11.02	0.64	1.76	2.41	2.93	8.06	11.03	95	4.90	A	A++	4.63	5.80	1751	1.08
	2.0+2.0+2.0+2.0	2.15	2.15	2.15	2.15	2.47	8.60	10.81	0.49	1.86	2.40	2.24	8.52	10.99	95	4.63	A	A+	4.22	5.80	1921	1.12
	2.0+2.0+2.0+2.5	2.02	2.02	2.02	2.53	2.57	8.60	10.90	0.50	1.86	2.41	2.28	8.52	11.03	95	4.65	A	A+	4.23	5.80	1917	1.12
	2.0+2.0+2.0+3.5	1.81	1.81	1.81	3.17	2.77	8.60	11.00	0.54	1.79	2.42	2.45	8.20	11.07	95	4.83	A	A+	4.38	5.80	1853	1.1
	2.0+2.0+2.0+4.2	1.69	1.69	1.69	3.54	2.78	8.60	11.01	0.53	1.80	2.42	2.41	8.24	11.07	95	4.80	A	A+	4.40	5.80	1846	1.09
	2.0+2.0+2.0+5.0	1.56	1.56	1.56	3.91	3.10	8.60	11.08	0.59	1.78	2.34	2.71	8.15	10.69	95	4.83	A	A+	4.42	5.80	1836	1.06
	2.0+2.0+2.5+2.5	1.91	1.91	2.39	2.39	2.67	8.60	10.91	0.52	1.85	2.36	2.37	8.47	10.82	95	4.66	A	A+	4.24	5.80	1912	1.11
	2.0+2.0+2.5+3.5	1.72	1.72	2.15	3.01	2.98	8.60	11.01	0.56	1.78	2.42	2.58	8.15	11.07	95	4.83	A	A+	4.39	5.80	1850	1.09
	2.0+2.0+2.5+4.2	1.61	1.61	2.01	3.38	2.98	8.60	11.01	0.56	1.78	2.42	2.58	8.15	11.07	95	4.85	A	A+	4.40	5.80	1842	1.09
	2.0+2.0+3.5+3.5	1.56	1.56	2.74	2.74	3.18	8.60	11.12	0.61	1.76	2.45	2.80	8.06	11.20	95	4.90	A	A++	4.65	5.80	1745	1.08
	2.0+2.5+2.5+2.5	1.81	2.26	2.26	2.26	2.77	8.60	10.91	0.54	1.84	2.36	2.45	8.43	10.82	95	4.68	A	A+	4.26	5.80	1905	1.1
	2.0+2.5+2.5+3.5	1.64	2.05	2.05	2.87	3.08	8.60	11.11	0.59	1.78	2.46	2.71	8.15	11.24	95	4.85	A	A+	4.39	5.80	1846	1.08
	2.5+2.5+2.5+2.5	2.15	2.15	2.15	2.15	2.88	8.60	11.10	0.54	1.84	2.38	2.45	8.43	10.91	95	4.70	A	A+	4.27	5.80	1900	1.09
	2.5+2.5+2.5+3.5	1.95	1.95	1.95	2.74	3.18	8.60	11.11	0.60	1.79	2.37	2.75	8.20	10.86	95	4.83	A	A+	4.42	5.80	1835	1.08

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
	1.5	1.80	---	---	---	1.73	1.80	2.89	0.42	0.52	1.00	1.91	2.38	4.57	95	---	---	---	---	---	---	---
	2.0	2.00	---	---	---	1.78	2.00	3.05	0.45	0.60	1.04	2.04	2.75	4.75	95	---	---	---	---	---	---	---
	2.5	2.50	---	---	---	1.85	2.50	3.59	0.48	0.78	1.31	2.18	3.57	5.99	95	---	---	---	---	---	---	---
	3.5	3.50	---	---	---	1.89	3.50	4.95	0.48	1.19	1.52	2.18	5.45	6.97	95	---	---	---	---	---	---	---
	4.2	---	4.20	---	---	1.94	4.20	5.02	0.49	1.43	1.53	2.22	6.55	7.01	95	---	---	---	---	---	---	---
	5.0	---	5.00	---	---	2.05	5.00	5.76	0.46	1.67	1.76	2.09	7.65	8.04	95	---	---	---	---	---	---	---
	6.0	---	6.00	---	---	2.15	6.00	6.73	0.46	2.01	2.36	2.09	9.20	10.79	95	---	---	---	---	---	---	---
	7.1	---	7.10	---	---	2.26	7.10	7.41	0.49	2.71	2.75	2.22	12.41	12.56	95							
	1.5+1.5	1.50	1.50	---	---	1.87	3.00	4.11	0.42	0.47	0.97	1.94	2.16	4.44	95	6.48	A	235	A++	6.96	3.0	151
	1.5+2.0	1.50	2.00	---	---	1.89	3.50	4.60	0.46	0.57	1.14	2.11	2.61	5.21	95	6.18	A	285	A++	7.09	3.5	173
	1.5+2.5	1.50	2.50	---	---	1.95	4.00	5.07	0.42	0.69	1.23	1.94	3.16	5.62	95	5.88	A	345	A++	7.18	4.0	195
	1.5+3.5	1.50	3.50	---	---	2.05	5.00	5.95	0.42	0.93	1.62	1.94	4.26	7.41	95	5.43	A	465	A++	7.33	5.0	239
	1.5+4.2	1.50	4.20	---	---	2.12	5.70	6.51	0.46	1.14	1.87	2.11	5.22	8.55	95	5.03	A	570	A++	7.34	5.7	272
	1.5+5.0	1.50	5.00	---	---	2.20	6.50	7.09	0.47	1.35	2.23	2.15	6.18	10.22	95	4.83	A	675	A++	7.41	6.5	307
	1.5+6.0	1.48	5.92	---	---	2.32	7.40	7.74	0.51	1.64	2.38	2.32	7.51	10.88	95	4.53	A	820	A++	7.36	7.4	352
	1.5+7.1	1.40	6.60	---	---	2.47	8.00	8.35	0.54	1.85	2.74	2.48	8.47	12.55	95	4.33	A	925	A++	7.35	8.0	410
	2.0+2.0	2.00	2.00	---	---	1.95	4.00	5.41	0.46	0.68	1.49	2.11	3.12	6.80	95	5.90	A	340	A++	7.18	4.0	195
	2.0+2.5	2.00	2.50	---	---	2.00	4.50	5.84	0.46	0.82	1.58	2.11	3.76	7.21	95	5.55	A	410	A++	7.23	4.5	218
	2.0+3.5	2.00	3.50	---	---	2.10	5.50	6.44	0.46	1.06	2.17	2.11	4.86	9.94	95	5.23	A	530	A++	7.38	5.5	261
	2.0+4.2	2.00	4.20	---	---	2.17	6.20	6.91	0.46	1.27	2.28	2.11	5.82	10.43	95	4.91	A	635	A++	7.39	6.2	294
	2.0+5.0	2.00	5.00	---	---	2.25	7.00	7.45	0.47	1.47	2.46	2.15	6.73	11.24	95	4.78	A	735	A++	7.43	7.0	330
	2.0+6.0	1.85	5.55	---	---	2.39	7.40	8.06	0.51	1.61	2.55	2.32	7.37	11.69	95	4.61	A	805	A++	7.38	7.4	351
	2.0+7.1	1.76	6.24	---	---	2.53	8.00	8.62	0.54	1.76	2.93	2.48	8.06	13.40	95	4.57	A	880	A++	7.40	8.0	379
	2.5+2.5	2.50	2.50	---	---	2.05	5.00	6.24	0.42	0.92	2.17	1.94	4.22	9.94	95	5.48	A	460	A++	7.34	5.0	239
	2.5+3.5	2.50	3.50	---	---	2.15	6.00	6.73	0.46	1.24	2.12	2.11	5.68	9.69	95	4.87	A	620	A++	7.39	6.0	285
	2.5+4.2	2.50	4.20	---	---	2.22	6.70	7.25	0.46	1.39	2.34	2.11	6.37	10.71	95	4.82	A	695	A++	7.45	6.7	315
	2.5+5.0	2.47	4.93	---	---	2.32	7.40	7.74	0.50	1.61	2.63	2.27	7.37	12.06	95	4.61	A	805	A++	7.36	7.4	352
	2.5+6.0	2.35	5.65	---	---	2.46	8.00	8.32	0.54	1.76	2.73	2.48	8.06	12.50	95	4.57	A	880	A++	7.40	8.0	379
	2.5+7.1	2.08	5.92	---	---	2.60	8.00	8.83	0.54	1.79	3.05	2.48	8.20	13.97	95	4.49	A	895	A++	7.39	8.0	403
	3.5+3.5	3.50	3.50	---	---	2.25	7.00	7.45	0.46	1.47	2.56	2.11	6.73	11.73	95	4.78	A	735	A++	7.43	7.0	330
	3.5+4.2	3.50	4.20	---	---	2.35	7.70	7.88	0.50	1.69	2.74	2.27	7.74	12.55	95	4.58	A	845	A++	7.40	7.7	365
	3.5+5.0	3.29	4.71	---	---	2.46	8.00	8.32	0.53	1.75	3.00	2.44	8.01	13.73	95	4.59	A	875	A++	7.37	8.0	380
	3.5+6.0	2.95	5.05	---	---	2.58	8.00	8.79	0.54	1.73	3.66	2.48	7.92	16.74	95	4.64	A	865	A++	7.38	8.0	380
4MXM80N2V1B	3.5+7.1	2.64	5.36	---	---	2.74	8.00	8.48	0.58	1.87	2.80	2.65	8.56	12.83	95	4.29	A	935	A++	7.27	8.0	434
	4.2+4.2	---	4.00	4.00	---	2.44	8.00	8.27	0.53	1.81	3.04	2.44	8.29	13.93	95	4.43	A	905	A++	7.38	8.0	399
	4.2+5.0	---	3.65	4.35	---	2.54	8.00	8.65	0.53	1.77	3.20	2.44	8.11	14.62	95	4.53	A	885	A++	7.32	8.0	383
	4.2+6.0	---	3.29	4.71	---	2.68	8.00	9.07	0.58	1.82	3.26	2.65	8.33	14.91	95	4.41	A	910	A++	7.29	8.0	408
	4.2+7.1	---	2.97	5.03	---	2.83	8.00	9.34	0.62	1.87	3.40	2.82	8.56	15.56	95	4.30	A	935	A++	7.27	8.0	434
	5.0+5.0	---	4.00	4.00	---	2.65	8.00	8.83	0.57	1.74	3.22	2.61	7.97	14.75	95	4.61	A	870	A++	7.40	8.0	402
	5.0+6.0	---	3.64	4.36	---	2.79	8.00	9.32	0.62	1.72	3.28	2.82	7.88	15.03	95	4.66	A	860	A++	7.44	8.0	423
	5.0+7.1	---	3.31	4.69	---	2.94	8.00	9.54	0.62	1.70	3.43	2.82	7.79	15.68	95	4.71	A	850	A++	7.45	8.0	423
	6.0+6.0	---	4.36	3.64	---	2.93	8.00	9.58	0.62	1.71	3.20	2.82	7.83	14.66	95	4.68	A	855	A++	7.45	8.0	423
	6.0+7.1	---	3.66	4.34	---	3.08	8.00	9.74	0.65	1.70	3.35	2.99	7.79	15.32	95	4.73	A	850	A++	7.45	8.0	423
	7.1+7.1	---	4.00	4.00	---	3.23	8.00	9.79	0.69	1.70	3.36	3.16	7.79	15.36	95	4.73	A	850	A++	7.45	8.0	423
	1.5+1.5+1.5	1.50	1.50	1.50	---	2.00	4.50	5.52	0.44	0.76	1.31	2.02	3.48	5.99	95	5.98	A	380	A++	7.93	4.5	199
	1.5+1.5+2.0	1.50	1.50	2.00	---	2.05	5.00	5.95	0.48	0.87	1.49	2.19	3.99	6.80	95	5.80	A	435	A++	8.00	5.0	219
	1.5+1.5+2.5	1.50	1.50	2.50	---	2.10	5.50	6.35	0.48	0.98	1.68	2.19	4.49	7.70	95	5.62	A	490	A++	8.23	5.5	234
	1.5+1.5+3.5	1.50	1.50	3.50	---	2.20	6.50	7.09	0.48	1.24	2.04	2.19	5.68	9.33	95	5.27	A	620	A++	8.25	6.5	276
	1.5+1.5+4.2	1.50	1.50	4.20	---	2.28	7.20	7.56	0.48	1.43	2.26	2.19	6.55	10.35	95	5.05	A	715	A++	8.22	7.2	307
	1.5+1.5+5.0	1.39	1.39	4.63	---	2.39	7.40	8.04	0.52	1.53	2.45	2.36	7.01	11.20	95	4.86	A	765	A++	8.14	7.4	318
	1.5+1.5+6.0	1.33	1.33	5.33	---	2.52	8.00	8.55	0.55	1.73	2.54	2.53	7.92	11.61	95	4.64	A	865	A++	8.09	8.0	346
	1.5+1.5+7.1	1.19	1.19	5.62	---	2.67	8.00	9.02	0.59	1.81	2.79	2.69	8.29	12.79	95	4.42	A	905	A++	8.04	8.0	370
	1.5+2.0+2.0	1.50	2.00	2.00	---	2.10	5.50	6.35	0.48	0.98	1.68	2.19	4.49	7.70	95	5.64	A	490	A++	8.21	5.5	235
	1.5+2.0+2.5	1.50	2.00	2.50	---	2.15	6.00	6.73	0.48	1.10	1.83	2.19	5.04	8.39	95	5.46	A	550	A++	8.20	6.0	256
	1.5+2.0+3.5	1.50	2.00	3.50	---	2.25	7.00	7.43	0.48	1.36	2.21	2.19	6.23	10.10	95	5.18	A	680	A++	8.23	7.0	298
	1.5+2.0+4.2	1.50	2.00	4.20	---	2.35	7.70	7.86	0.51	1.62	2.44	2.32	7.42	11.16	95	4.78	A	810	A++	8.16	7.7	331
	1.5+2.0+5.0	1.41	1.88	4.71	---	2.46	8.00	8.30	0.54	1.72	2.63	2.48	7.88	12.02	95	4.66	A	860	A++	8.08	8.0	347
	1.5+2.0+6.0	1.26	1.68	5.05	---	2.58	8.00	8.77	0.55	1.71	2.67	2.53	7.83	12.22	95	4.68	A	855	A++	8.07	8.0	347
	1.5+2.0+7.1	1.13	1.51	5.36	---	2.74	8.00	9.19	0.59	1.85	2.93	2.69	8.47	13.40	95	4.33	A	925	A++	7.98	8.0	395
	1.5+2.5+2.5	1.50	2.50	2.50	---	2.20	6.50	7.09	0.48	1.24	2.04	2.19	5.68	9.33	95	5.26	A	620	A++	8.21	6.5	278
	1.5+2.5+3.5	1.48	2.47	3.45	---	2.32	7.40	7.74	0.51	1.51	2.38	2.32	6.92	10.88	95	4.93	A	755	A++	8.19	7.4	317
	1.5+2.5+4.2	1.46	2.44	4.10	---	2.42	8.00	8.15	0.51	1.75	2.62	2.32	8.01	11.98	95	4.58	A	875	A++	8.07	8.0	356
	1.5+2.5+5.0	1.33	2.22	4.44	---	2.52	8.00	8.55	0.54	1.72	2.76	2.48	7.88	12.63	95	4.66	A	860	A++	8.08	8.0	347
	1.5+2.5+6.0	1.20	2.00	4.80	---	2.65	8.00	8.98	0.55	1.81	2.79	2.53	8.29	12.79	95	4.42	A	905	A++	8.04	8.0	370
	1.5+2.5+7.1	1.08	1.80	5.12	---	2.80	8.00	9.34	0.59	1.85	3.00	2.69	8.47	13.73	95	4.33	A	925	A++	7.98	8.0	395
	1.5+3.5+3.5	1.41	3.29	3.29	---	2.46	8.00	8.30	0.54	1.76	2.74	2.48	8.06	12.55	95	4.56	A	880	A++	8.05	8.0	348
	1.5+3.5+4.2	1.30	3.04	3.65	---	2.54	8.00	8.64	0.54	1.75	2.93	2.48	8.01	13.40	95	4.58	A	875	A++	8.04	8.0	349

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
	1.5+3.5+5.0	1.20	2.80	4.00	---	2.65	8.00	8.98	0.58	1.81	3.08	2.65	8.29	14.09	95	4.42	A	905	A++	8.04	8.0	370
	1.5+3.5+6.0	1.09	2.55	4.36	---	2.79	8.00	9.31	0.59	1.85	3.00	2.69	8.47	13.73	95	4.33	A	925	A++	7.98	8.0	395
	1.5+3.5+7.1	0.99	2.31	4.69	---	2.94	8.00	9.58	0.62	1.83	3.21	2.82	8.38	14.70	95	4.38	A	915	A++	7.99	8.0	394
	1.5+4.2+4.2	1.21	3.39	3.39	---	2.64	8.00	8.94	0.58	1.74	3.12	2.65	7.97	14.30	95	4.60	A	870	A++	8.20	8.0	423
	1.5+4.2+5.0	1.12	3.14	3.74	---	2.75	8.00	9.22	0.58	1.71	3.21	2.65	7.83	14.70	95	4.70	A	855	A++	8.11	8.0	389
	1.5+4.2+6.0	1.03	2.87	4.10	---	2.89	8.00	9.49	0.62	1.69	3.14	2.82	7.74	14.38	95	4.75	A	845	A++	8.12	8.0	388
	1.5+4.2+7.1	0.94	2.63	4.44	---	3.04	8.00	9.69	0.65	1.67	3.28	2.99	7.65	15.03	95	4.80	A	835	A++	8.12	8.0	388
	1.5+5.0+5.0	1.04	3.48	3.48	---	2.86	8.00	9.45	0.62	1.61	3.31	2.82	7.37	15.15	95	4.98	A	805	A++	8.12	8.0	388
	1.5+5.0+6.0	0.96	3.20	3.84	---	3.00	8.00	9.64	0.63	1.60	3.16	2.86	7.33	14.46	95	5.00	A	800	A++	8.12	8.0	388
	1.5+5.0+7.1	0.88	2.94	4.18	---	3.15	8.00	9.76	0.65	1.59	3.23	2.99	7.28	14.79	95	5.05	A	795	A++	8.13	8.0	388
	1.5+6.0+6.0	0.89	3.56	3.56	---	3.13	8.00	9.75	0.66	1.60	2.93	3.03	7.33	13.40	95	5.02	A	800	A++	8.12	8.0	388
	2.0+2.0+2.0	2.00	2.00	2.00	---	2.15	6.00	6.76	0.48	1.10	1.89	2.19	5.04	8.64	95	5.46	A	550	A++	8.20	6.0	256
	2.0+2.0+2.5	2.00	2.00	2.50	---	2.20	6.50	7.09	0.48	1.24	2.04	2.19	5.68	9.33	95	5.26	A	620	A++	8.21	6.5	278
	2.0+2.0+3.5	1.97	1.97	3.45	---	2.32	7.40	7.76	0.51	1.51	2.38	2.32	6.92	10.88	95	4.93	A	755	A++	8.19	7.4	317
	2.0+2.0+4.2	1.95	1.95	4.10	---	2.42	8.00	8.17	0.51	1.75	2.55	2.32	8.01	11.69	95	4.58	A	875	A++	8.07	8.0	356
	2.0+2.0+5.0	1.78	1.78	4.44	---	2.52	8.00	8.57	0.54	1.72	2.82	2.48	7.88	12.91	95	4.66	A	860	A++	8.07	8.0	347
	2.0+2.0+6.0	1.60	1.60	4.80	---	2.65	8.00	9.00	0.55	1.81	2.79	2.53	8.29	12.79	95	4.42	A	905	A++	8.03	8.0	371
	2.0+2.0+7.1	1.44	1.44	5.12	---	2.80	8.00	9.36	0.59	1.83	3.07	2.69	8.38	14.05	95	4.38	A	915	A++	7.99	8.0	395
	2.0+2.5+2.5	2.00	2.50	2.50	---	2.25	7.00	7.45	0.48	1.36	2.21	2.19	6.23	10.10	95	5.18	A	680	A++	8.23	7.0	298
	2.0+2.5+3.5	1.85	2.31	3.24	---	2.39	7.40	8.06	0.51	1.50	2.55	2.32	6.87	11.69	95	4.94	A	750	A++	8.19	7.4	317
	2.0+2.5+4.2	1.84	2.30	3.86	---	2.48	8.00	8.43	0.54	1.75	2.68	2.48	8.01	12.26	95	4.59	A	875	A++	8.12	8.0	375
	2.0+2.5+5.0	1.68	2.11	4.21	---	2.58	8.00	8.79	0.54	1.72	2.95	2.48	7.88	13.48	95	4.67	A	860	A++	8.07	8.0	347
	2.0+2.5+6.0	1.52	1.90	4.57	---	2.72	8.00	9.17	0.59	1.84	2.93	2.69	8.43	13.40	95	4.36	A	920	A++	8.00	8.0	381
	2.0+2.5+7.1	1.38	1.72	4.90	---	2.87	8.00	9.49	0.62	1.83	3.14	2.82	8.38	14.38	95	4.39	A	915	A++	8.00	8.0	394
	2.0+3.5+3.5	1.78	3.11	3.11	---	2.52	8.00	8.57	0.54	1.74	2.87	2.48	7.97	13.12	95	4.60	A	870	A++	8.05	8.0	348
	2.0+3.5+4.2	1.65	2.89	3.46	---	2.61	8.00	8.87	0.58	1.79	3.00	2.65	8.20	13.73	95	4.49	A	895	A++	8.02	8.0	371
	2.0+3.5+5.0	1.52	2.67	3.81	---	2.72	8.00	9.17	0.58	1.83	3.21	2.65	8.38	14.70	95	4.38	A	915	A++	7.99	8.0	381
	2.0+3.5+6.0	1.39	2.43	4.17	---	2.86	8.00	9.47	0.62	1.83	3.13	2.82	8.38	14.34	95	4.39	A	915	A++	7.99	8.0	394
	2.0+3.5+7.1	1.27	2.22	4.51	---	3.01	8.00	9.28	0.62	1.81	2.94	2.82	8.29	13.44	95	4.44	A	905	A++	8.00	8.0	394
	2.0+4.2+4.2	1.54	3.23	3.23	---	2.71	8.00	9.17	0.58	1.80	3.26	2.65	8.24	14.91	95	4.45	A	900	A++	8.00	8.0	381
	2.0+4.2+5.0	1.43	3.00	3.57	---	2.82	8.00	9.41	0.62	1.84	3.36	2.82	8.43	15.36	95	4.37	A	920	A++	7.98	8.0	395
	2.0+4.2+6.0	1.31	2.75	3.93	---	2.95	8.00	9.64	0.62	1.81	3.20	2.82	8.29	14.66	95	4.42	A	905	A++	7.99	8.0	395
	2.0+4.2+7.1	1.20	2.53	4.27	---	3.11	8.00	9.79	0.65	1.79	3.28	2.99	8.20	15.03	95	4.47	A	895	A++	8.00	8.0	394
4MXM80N2V1B	2.0+5.0+5.0	1.33	3.33	3.33	---	2.93	8.00	9.58	0.62	1.74	3.38	2.82	7.97	15.48	95	4.62	A	870	A++	8.02	8.0	393
	2.0+5.0+6.0	1.23	3.08	3.69	---	3.06	8.00	9.73	0.65	1.72	3.23	2.99	7.88	14.79	95	4.67	A	860	A++	8.02	8.0	393
	2.0+5.0+7.1	1.13	2.84	4.03	---	3.22	8.00	9.79	0.65	1.70	3.23	2.99	7.79	14.79	95	4.72	A	850	A++	8.03	8.0	392
	2.0+6.0+6.0	1.14	3.43	3.43	---	3.20	8.00	9.79	0.66	1.71	3.00	3.03	7.83	13.73	95	4.69	A	855	A++	8.03	8.0	393
	2.5+2.5+2.5	2.47	2.47	2.47	---	2.32	7.40	7.76	0.51	1.50	2.38	2.32	6.87	10.88	95	4.95	A	750	A++	8.19	7.4	316
	2.5+2.5+3.5	2.35	2.35	3.29	---	2.46	8.00	8.32	0.54	1.74	2.74	2.48	7.97	12.55	95	4.61	A	870	A++	8.06	8.0	347
	2.5+2.5+4.2	2.17	2.17	3.65	---	2.54	8.00	8.66	0.54	1.73	2.93	2.48	7.92	13.40	95	4.63	A	865	A++	8.08	8.0	347
	2.5+2.5+5.0	2.00	2.00	4.00	---	2.65	8.00	9.00	0.58	1.81	3.08	2.65	8.29	14.09	95	4.43	A	905	A++	8.02	8.0	371
	2.5+2.5+6.0	1.82	1.82	4.36	---	2.79	8.00	9.33	0.59	1.83	3.07	2.69	8.38	14.05	95	4.39	A	915	A++	8.00	8.0	394
	2.5+2.5+7.1	1.65	1.65	4.69	---	2.94	8.00	9.60	0.62	1.81	3.21	2.82	8.29	14.70	95	4.44	A	905	A++	8.01	8.0	394
	2.5+3.5+3.5	2.11	2.95	2.95	---	2.58	8.00	8.51	0.54	1.73	2.68	2.48	7.92	12.26	95	4.64	A	865	A++	8.07	8.0	347
	2.5+3.5+4.2	1.96	2.75	3.29	---	2.68	8.00	9.07	0.58	1.81	3.06	2.65	8.29	14.01	95	4.44	A	905	A++	8.03	8.0	371
	2.5+3.5+5.0	1.82	2.55	3.64	---	2.79	8.00	9.33	0.62	1.81	3.28	2.82	8.29	15.03	95	4.43	A	905	A++	7.99	8.0	395
	2.5+3.5+6.0	1.67	2.33	4.00	---	2.93	8.00	9.58	0.62	1.79	3.20	2.82	8.20	14.66	95	4.48	A	895	A++	8.00	8.0	394
	2.5+3.5+7.1	1.53	2.14	4.34	---	3.08	8.00	9.28	0.65	1.77	2.94	2.99	8.11	13.44	95	4.53	A	885	A++	8.00	8.0	394
	2.5+4.2+4.2	1.83	3.08	3.08	---	2.78	8.00	9.20	0.62	1.87	3.27	2.82	8.56	14.95	95	4.30	A	935	A++	7.96	8.0	396
	2.5+4.2+5.0	1.71	2.87	3.42	---	2.89	8.00	9.54	0.62	1.82	3.43	2.82	8.33	15.68	95	4.40	A	910	A++	7.94	8.0	397
	2.5+4.2+6.0	1.57	2.65	3.78	---	3.02	8.00	9.72	0.62	1.80	3.28	2.82	8.24	14.99	95	4.45	A	900	A++	7.94	8.0	397
	2.5+4.2+7.1	1.45	2.43	4.12	---	3.17	8.00	9.82	0.65	1.78	3.36	2.99	8.15	15.36	95	4.50	A	890	A++	7.95	8.0	396
	2.5+5.0+5.0	1.60	3.20	3.20	---	3.00	8.00	9.66	0.65	1.73	3.45	2.99	7.92	15.80	95	4.64	A	865	A++	8.03	8.0	393
	2.5+5.0+6.0	1.48	2.96	3.56	---	3.13	8.00	9.77	0.65	1.71	3.23	2.99	7.83	14.79	95	4.69	A	855	A++	8.03	8.0	392
	2.5+6.0+6.0	1.38	3.31	3.31	---	3.27	8.00	9.79	0.66	1.70	3.00	3.03	7.79	13.73	95	4.71	A	850	A++	8.04	8.0	392
	3.5+3.5+3.5	2.67	2.67	2.67	---	2.72	8.00	8.84	0.58	1.79	2.80	2.65	8.20	12.83	95	4.47	A	895	A++	8.00	8.0	381
	3.5+3.5+4.2	2.50	2.50	3.00	---	2.82	8.00	9.48	0.62	1.86	3.26	2.82	8.52	14.91	95	4.32	A	930	A++	7.93	8.0	397
	3.5+3.5+5.0	2.33	2.33	3.33	---	2.93	8.00	9.54	0.62	1.81	3.43	2.82	8.29	15.68	95	4.42	A	905	A++	7.91	8.0	398
	3.5+3.5+6.0	2.15	2.15	3.69	---	3.06	8.00	9.29	0.65	1.79	3.00	2.99	8.20	13.73	95	4.47	A	895	A++	7.92	8.0	398
	3.5+3.5+7.1	1.99	1.99	4.03	---	3.22	8.00	9.79	0.69	1.77	3.36	3.16	8.11	15.36	95	4.52	A	885	A++	7.93	8.0	398
	3.5+4.2+4.2	2.35	2.82	2.82	---	2.91	8.00	9.36	0.62	1.85	3.40	2.82	8.47	15.56	95	4.34	A	925	A++	7.94	8.0	397
	3.5+4.2+5.0	2.20	2.65	3.15	---	3.02	8.00	9.55	0.65	1.81	3.43	2.99	8.29	15.68	95	4.44	A	905	A++	7.92	8.0	398
	3.5+4.2+6.0	2.04	2.45	3.50	---	3.16	8.00	9.78	0.65	1.79	3.36	2.99	8.20	15.36	95	4.49	A	895	A++	7.92	8.0	398
	3.5+5.0+5.0	2.07	2.96	2.96	---	3.13	8.00	9.74	0.65	1.71	3.45	2.99	7.83	15.80	95	4.68	A	855	A++	8.04	8.0	392
	3.5+5.0+6.0	1.93	2.76	3.31	---	3.27	8.00	9.79	0.69	1.70	3.23	3.16	7.79	14.79	95	4.73	A	850	A++	8.04	8.0	392
	4.2+4.2+4.2	---	2.67	2.67	2.67	3.01	8.00	9.37	0.65	1.84	3.40	2.99	8.43	15.56	95	4.36	A	920	A++	7.94	8.0	397
	4.2+4.2+5.0	---	2.51	2.51	2.99	3.12	8.00	9.56	0.65	1.80	3.43	2.99	8.24	15.68	95	4.46	A	900	A++	7.92	8.0	398

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
4MXM80N2V1B	4.2+4.2+6.0	---	2.33	2.33	3.33	3.26	8.00	9.79	0.69	1.78	3.36	3.16	8.15	15.36	95	4.51	A	890	A++	7.93	8.0	398
	4.2+5.0+5.0	---	2.37	2.82	2.82	3.23	8.00	9.75	0.69	1.79	3.45	3.16	8.20	15.80	95	4.48	A	895	A++	7.92	8.0	398
	1.5+1.5+1.5+1.5	1.50	1.50	1.50	1.50	2.15	6.00	6.73	0.49	1.08	1.54	2.23	4.95	7.05	95	5.58	A	540	A++	8.39	6.0	251
	1.5+1.5+1.5+2.0	1.50	1.50	1.50	2.00	2.20	6.50	7.09	0.49	1.21	1.69	2.23	5.54	7.74	95	5.41	A	605	A++	8.46	6.5	269
	1.5+1.5+1.5+2.5	1.50	1.50	1.50	2.50	2.25	7.00	7.43	0.49	1.34	1.84	2.23	6.14	8.43	95	5.24	A	670	A+++	8.55	7.0	287
	1.5+1.5+1.5+3.5	1.39	1.39	1.39	3.24	2.39	7.40	8.04	0.52	1.62	2.12	2.36	7.42	9.69	95	4.59	A	810	A++	8.33	7.4	311
	1.5+1.5+1.5+4.2	1.38	1.38	1.38	3.86	2.48	8.00	8.40	0.52	1.99	2.30	2.36	9.11	10.51	95	4.02	A	995	A++	8.10	8.0	376
	1.5+1.5+1.5+5.0	1.26	1.26	1.26	4.21	2.58	8.00	8.77	0.55	1.95	2.55	2.53	8.93	11.69	95	4.12	A	975	A++	8.03	8.0	349
	1.5+1.5+1.5+6.0	1.14	1.14	1.14	4.57	2.72	8.00	9.15	0.56	2.21	2.59	2.57	10.12	11.85	95	3.62	A	1105	A++	7.81	8.0	390
	1.5+1.5+1.5+7.1	1.03	1.03	1.03	4.90	2.87	8.00	9.47	0.59	2.18	2.72	2.69	9.98	12.46	95	3.67	A	1090	A++	7.85	8.0	401
	1.5+1.5+2.0+2.0	1.50	1.50	2.00	2.00	2.25	7.00	7.43	0.49	1.34	1.84	2.23	6.14	8.43	95	5.24	A	670	A+++	8.55	7.0	287
	1.5+1.5+2.0+2.5	1.48	1.48	1.97	2.47	2.32	7.40	7.74	0.52	1.62	1.96	2.36	7.42	8.96	95	4.57	A	810	A++	8.32	7.4	311
	1.5+1.5+2.0+3.5	1.41	1.41	1.88	3.29	2.46	8.00	8.30	0.52	1.99	2.23	2.36	9.11	10.22	95	4.02	A	995	A++	8.04	8.0	349
	1.5+1.5+2.0+4.2	1.30	1.30	1.74	3.65	2.54	8.00	8.64	0.55	1.98	2.42	2.53	9.07	11.08	95	4.04	A	990	A++	8.04	8.0	349
	1.5+1.5+2.0+5.0	1.20	1.20	1.60	4.00	2.65	8.00	8.98	0.55	2.15	2.68	2.53	9.84	12.26	95	3.72	A	1075	A++	7.86	8.0	379
	1.5+1.5+2.0+6.0	1.09	1.09	1.45	4.36	2.79	8.00	9.31	0.59	2.18	2.65	2.69	9.98	12.14	95	3.67	A	1090	A++	7.85	8.0	401
	1.5+1.5+2.0+7.1	0.99	0.99	1.32	4.69	2.94	8.00	9.58	0.63	2.15	2.79	2.86	9.84	12.79	95	3.72	A	1075	A++	7.87	8.0	401
	1.5+1.5+2.5+2.5	1.39	1.39	2.31	2.31	2.39	7.40	8.04	0.52	1.62	2.12	2.36	7.42	9.69	95	4.57	A	810	A++	8.32	7.4	311
	1.5+1.5+2.5+3.5	1.33	1.33	2.22	3.11	2.52	8.00	8.55	0.55	1.98	2.55	2.53	9.07	11.65	95	4.04	A	990	A++	8.05	8.0	348
	1.5+1.5+2.5+4.2	1.24	1.24	2.06	3.46	2.61	8.00	8.85	0.55	2.18	2.73	2.53	9.98	12.50	95	3.68	A	1090	A++	7.84	8.0	380
	1.5+1.5+2.5+5.0	1.14	1.14	1.90	3.81	2.72	8.00	9.15	0.59	2.20	2.81	2.69	10.07	12.87	95	3.64	A	1100	A++	7.82	8.0	390
	1.5+1.5+2.5+6.0	1.04	1.04	1.74	4.17	2.86	8.00	9.45	0.59	2.22	2.72	2.69	10.17	12.46	95	3.61	A	1110	A++	7.81	8.0	404
	1.5+1.5+2.5+7.1	0.95	0.95	1.59	4.51	3.01	8.00	9.66	0.63	2.19	2.86	2.86	10.03	13.08	95	3.66	A	1095	A++	7.82	8.0	403
	1.5+1.5+3.5+3.5	1.20	1.20	2.80	2.80	2.65	8.00	8.98	0.55	2.18	2.80	2.53	9.98	12.83	95	3.68	A	1090	A++	7.84	8.0	380
	1.5+1.5+3.5+4.2	1.12	1.12	2.62	3.14	2.75	8.00	9.22	0.59	2.26	2.94	2.69	10.35	13.44	95	3.55	A	1130	A++	7.79	8.0	405
	1.5+1.5+3.5+5.0	1.04	1.04	2.43	3.48	2.86	8.00	9.45	0.59	2.20	3.02	2.69	10.07	13.81	95	3.65	A	1100	A++	7.78	8.0	405
	1.5+1.5+3.5+6.0	0.96	0.96	2.24	3.84	3.00	8.00	9.64	0.63	2.17	2.86	2.86	9.94	13.08	95	3.70	A	1085	A++	7.80	8.0	404
	1.5+1.5+3.5+7.1	0.88	0.88	2.06	4.18	3.15	8.00	9.76	0.66	2.14	2.93	3.03	9.80	13.40	95	3.75	A	1070	A++	7.82	8.0	403
	1.5+1.5+4.2+4.2	1.05	1.05	2.95	2.95	2.84	8.00	9.41	0.59	2.25	3.07	2.69	10.30	14.05	95	3.57	A	1125	A++	7.79	8.0	404
	1.5+1.5+4.2+5.0	0.98	0.98	2.75	3.28	2.95	8.00	9.59	0.63	2.18	3.09	2.86	9.98	14.13	95	3.67	A	1090	A++	7.79	8.0	405
	1.5+1.5+4.2+6.0	0.91	0.91	2.55	3.64	3.09	8.00	9.73	0.63	2.15	2.93	2.86	9.84	13.40	95	3.72	A	1075	A++	7.81	8.0	404
	1.5+1.5+4.2+7.1	0.84	0.84	2.35	3.97	3.24	8.00	9.77	0.66	2.13	2.93	3.03	9.75	13.40	95	3.77	A	1065	A++	7.82	8.0	403
	1.5+1.5+5.0+5.0	0.92	0.92	3.08	3.08	3.06	8.00	9.71	0.63	2.05	3.04	2.86	9.39	13.93	95	3.92	A	1025	A++	7.84	8.0	402
	1.5+1.5+5.0+6.0	0.86	0.86	2.86	3.43	3.20	8.00	9.77	0.66	2.02	2.87	3.03	9.25	13.16	95	3.97	A	1010	A++	7.85	8.0	401
	1.5+2.0+2.0+2.0	1.48	1.97	1.97	1.97	2.32	7.40	7.74	0.52	1.62	1.96	2.36	7.42	8.96	95	4.57	A	810	A++	8.32	7.4	311
	1.5+2.0+2.0+2.5	1.39	1.85	1.85	2.31	2.39	7.40	8.04	0.52	1.62	2.12	2.36	7.42	9.69	95	4.59	A	810	A++	8.18	7.4	317
	1.5+2.0+2.0+3.5	1.33	1.78	1.78	3.11	2.52	8.00	8.55	0.55	1.98	2.36	2.53	9.07	10.79	95	4.04	A	990	A++	8.05	8.0	348
	1.5+2.0+2.0+4.2	1.24	1.65	1.65	3.46	2.61	8.00	8.85	0.55	2.18	2.55	2.53	9.98	11.65	95	3.68	A	1090	A++	7.84	8.0	380
	1.5+2.0+2.0+5.0	1.14	1.52	1.52	3.81	2.72	8.00	9.15	0.59	2.21	2.81	2.69	10.12	12.87	95	3.62	A	1105	A++	7.81	8.0	390
	1.5+2.0+2.0+6.0	1.04	1.39	1.39	4.17	2.86	8.00	9.45	0.59	2.22	2.72	2.69	10.17	12.46	95	3.61	A	1110	A++	7.81	8.0	404
	1.5+2.0+2.0+7.1	0.95	1.27	1.27	4.51	3.01	8.00	9.66	0.63	2.19	2.86	2.86	10.03	13.08	95	3.66	A	1095	A++	7.82	8.0	403
	1.5+2.0+2.5+2.5	1.41	1.88	2.35	2.35	2.46	8.00	8.30	0.52	2.00	2.23	2.36	9.16	10.22	95	4.00	A	1000	A++	8.01	8.0	350
	1.5+2.0+2.5+3.5	1.26	1.68	2.11	2.95	2.58	8.00	8.77	0.55	1.98	2.67	2.53	9.07	12.22	95	4.04	A	990	A++	8.03	8.0	349
	1.5+2.0+2.5+4.2	1.18	1.57	1.96	3.29	2.68	8.00	9.05	0.59	2.17	2.87	2.69	9.94	13.12	95	3.70	A	1085	A++	7.83	8.0	380
	1.5+2.0+2.5+5.0	1.09	1.45	1.82	3.64	2.79	8.00	9.31	0.59	2.23	2.88	2.69	10.21	13.20	95	3.59	A	1115	A++	7.79	8.0	404
	1.5+2.0+2.5+6.0	1.00	1.33	1.67	4.00	2.93	8.00	9.56	0.63	2.20	2.79	2.86	10.07	12.75	95	3.64	A	1100	A++	7.81	8.0	404
	1.5+2.0+2.5+7.1	0.92	1.22	1.53	4.34	3.08	8.00	9.72	0.63	2.17	2.93	2.86	9.94	13.40	95	3.69	A	1085	A++	7.83	8.0	403
	1.5+2.0+3.5+3.5	1.14	1.52	2.67	2.67	2.72	8.00	9.15	0.59	2.21	2.94	2.69	10.12	13.44	95	3.62	A	1105	A++	7.81	8.0	390
	1.5+2.0+3.5+4.2	1.07	1.43	2.50	3.00	2.82	8.00	9.36	0.59	2.25	3.07	2.69	10.30	14.05	95	3.57	A	1125	A++	7.79	8.0	404
	1.5+2.0+3.5+5.0	1.00	1.33	2.33	3.33	2.93	8.00	9.56	0.63	2.18	3.09	2.86	9.98	14.13	95	3.67	A	1090	A++	7.79	8.0	405
	1.5+2.0+3.5+6.0	0.92	1.23	2.15	3.69	3.06	8.00	9.71	0.63	2.15	2.93	2.86	9.84	13.40	95	3.72	A	1075	A++	7.81	8.0	404
	1.5+2.0+3.5+7.1	0.85	1.13	1.99	4.03	3.22	8.00	9.77	0.66	2.13	2.93	3.03	9.75	13.40	95	3.77	A	1065	A++	7.82	8.0	403
	1.5+2.0+4.2+4.2	1.01	1.34	2.82	2.82	2.91	8.00	9.54	0.62	2.23	3.14	2.82	10.21	14.38	95	3.59	A	1115	A++	7.80	8.0	404
	1.5+2.0+4.2+5.0	0.94	1.26	2.65	3.15	3.02	8.00	9.67	0.63	2.17	3.16	2.86	9.94	14.46	95	3.69	A	1085	A++	7.80	8.0	404
	1.5+2.0+4.2+6.0	0.88	1.17	2.45	3.50	3.16	8.00	9.76	0.66	2.14	2.93	3.03	9.80	13.40	95	3.74	A	1070	A++	7.81	8.0	403
	1.5+2.0+5.0+5.0	0.89	1.19	2.96	2.96	3.13	8.00	9.75	0.65	2.06	3.12	2.99	9.43	14.26	95	3.89	A	1030	A++	7.84	8.0	402
	1.5+2.0+5.0+6.0	0.83	1.10	2.76	3.31	3.27	8.00	9.77	0.66	2.03	2.87	3.03	9.30	13.16	95	3.94	A	1015	A++	7.85	8.0	401
	1.5+2.5+2.5+2.5	1.33	2.22	2.22	2.22	2.52	8.00	8.55	0.55	1.98	2.36	2.53	9.07	10.79	95	4.04	A	990	A++	8.03	8.0	349
	1.5+2.5+2.5+3.5	1.20	2.00	2.00	2.80	2.65	8.00	8.98	0.55	2.17	2.79	2.53	9.94	12.79	95	3.70	A	1085	A++	7.83	8.0	380
	1.5+2.5+2.5+4.2	1.12	1.87	1.87	3.14	2.75	8.00	9.22	0.59	2.23	2.94	2.69	10.21	13.44	95	3.59	A	1115	A++	7.80	8.0	404
	1.5+2.5+2.5+5.0	1.04	1.74	1.74	3.48	2.86	8.00	9.45	0.59	2.17	3.02	2.69	9.94	13.81	95	3.69	A	1085	A++	7.80	8.0	404
	1.5+2.5+2.5+6.0	0.96	1.60	1.60	3.84	3.00	8.00	9.64	0.63	2.14	2.86	2.86	9.80	13.08	95	3.74	A	1070	A++	7.81	8.0	403
	1.5+2.5+2.5+7.1	0.88	1.47	1.47	4.18	3.15	8.00	9.76	0.66	2.12	2.93	3.03	9.71	13.40	95	3.79	A	1060	A++	7.83	8.0	403
	1.5+2.5+3.5+3.5	1.09	1.82	2.55	2.55	2.79	8.00	9.31	0.59	2.15	3.00	2.69	9.84	13.73	95	3.72	A	1075	A++	7.87	8.0	400
	1.5+2.5+3.5+4.2	1.03	1.71	2.39	2.87	2.89	8.00	9.49	0.62	2.14	3.14	2.82	9.80	14.38	95	3.74	A	1070	A++	7.88	8.0	400
	1.5+2.5+3.5+5.0	0.96	1.60	2.24	3.20	3.00	8.00	9.64	0.63	2.09	3.09	2.86	9.57	14.13	95	3.84	A	1045	A++	7.87	8.0	400

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
4MXM80N2V1B	1.5+2.5+3.5+6.0	0.89	1.48	2.07	3.56	3.13	8.00	9.75	0.66	2.06	2.93	3.03	9.43	13.40	95	3.89	A	1030	A++	7.89	8.0	400
	1.5+2.5+4.2+4.2	0.97	1.61	2.71	2.71	2.98	8.00	9.63	0.62	2.13	3.21	2.82	9.75	14.70	95	3.76	A	1065	A++	7.88	8.0	400
	1.5+2.5+4.2+5.0	0.91	1.52	2.55	3.03	3.09	8.00	9.73	0.65	2.08	3.16	2.99	9.52	14.46	95	3.86	A	1040	A++	7.88	8.0	400
	1.5+2.5+4.2+6.0	0.85	1.41	2.37	3.38	3.23	8.00	9.77	0.66	2.05	2.93	3.03	9.39	13.40	95	3.91	A	1025	A++	7.89	8.0	399
	1.5+2.5+5.0+5.0	0.86	1.43	2.86	2.86	3.20	8.00	9.77	0.65	2.07	3.12	2.99	9.48	14.26	95	3.88	A	1035	A++	7.88	8.0	400
	1.5+3.5+3.5+3.5	1.00	2.33	2.33	2.33	2.93	8.00	9.56	0.62	2.14	3.07	2.82	9.80	14.05	95	3.74	A	1070	A++	7.87	8.0	401
	1.5+3.5+3.5+4.2	0.94	2.20	2.20	2.65	3.02	8.00	9.67	0.62	2.13	3.21	2.82	9.75	14.70	95	3.76	A	1065	A++	7.87	8.0	400
	1.5+3.5+3.5+5.0	0.89	2.07	2.07	2.96	3.13	8.00	9.75	0.65	2.08	3.16	2.99	9.52	14.46	95	3.86	A	1040	A++	7.86	8.0	401
	1.5+3.5+3.5+6.0	0.83	1.93	1.93	3.31	3.27	8.00	9.77	0.66	2.05	2.93	3.03	9.39	13.40	95	3.91	A	1025	A++	7.88	8.0	400
	1.5+3.5+4.2+4.2	0.90	2.09	2.51	2.51	3.12	8.00	9.74	0.65	2.12	3.28	2.99	9.71	15.03	95	3.78	A	1060	A++	7.88	8.0	400
	1.5+3.5+4.2+5.0	0.85	1.97	2.37	2.82	3.23	8.00	9.77	0.65	2.07	3.24	2.99	9.48	14.83	95	3.88	A	1035	A++	7.87	8.0	400
	1.5+4.2+4.2+4.2	0.85	2.38	2.38	2.38	3.22	8.00	9.77	0.69	2.11	3.28	3.16	9.66	15.03	95	3.80	A	1055	A++	7.88	8.0	400
	2.0+2.0+2.0+2.0	1.85	1.85	1.85	1.85	2.39	7.40	8.06	0.52	1.62	2.12	2.36	7.42	9.69	95	4.57	A	810	A++	8.32	7.4	311
	2.0+2.0+2.0+2.5	1.88	1.88	1.88	2.35	2.46	8.00	8.32	0.52	1.95	2.23	2.36	8.93	10.22	95	4.12	A	975	A++	8.09	8.0	346
	2.0+2.0+2.0+3.5	1.68	1.68	1.68	2.95	2.58	8.00	8.79	0.55	1.94	2.55	2.53	8.88	11.65	95	4.14	A	970	A++	8.09	8.0	346
	2.0+2.0+2.0+4.2	1.57	1.57	1.57	3.29	2.68	8.00	9.07	0.59	2.26	2.67	2.69	10.35	12.22	95	3.54	A	1130	A++	7.69	8.0	387
	2.0+2.0+2.0+5.0	1.45	1.45	1.45	3.64	2.79	8.00	9.33	0.59	2.30	2.95	2.69	10.53	13.52	95	3.49	A	1150	A++	7.62	8.0	413
	2.0+2.0+2.0+6.0	1.33	1.33	1.33	4.00	2.93	8.00	9.58	0.63	2.26	2.86	2.86	10.35	13.08	95	3.54	A	1130	A++	7.65	8.0	412
	2.0+2.0+2.0+7.1	1.22	1.22	1.22	4.34	3.08	8.00	9.74	0.63	2.20	2.93	2.86	10.07	13.40	95	3.65	A	1100	A++	7.71	8.0	409
	2.0+2.0+2.5+2.5	1.73	1.73	2.17	2.17	2.52	7.80	8.57	0.55	1.76	2.42	2.53	8.06	11.08	95	4.43	A	880	A++	8.20	7.8	333
	2.0+2.0+2.5+3.5	1.60	1.60	2.00	2.80	2.65	8.00	9.00	0.55	2.21	2.79	2.53	10.12	12.79	95	3.62	A	1105	A++	7.74	8.0	385
	2.0+2.0+2.5+4.2	1.50	1.50	1.87	3.14	2.75	8.00	9.24	0.59	2.31	2.94	2.69	10.58	13.44	95	3.47	A	1155	A++	7.68	8.0	410
	2.0+2.0+2.5+5.0	1.39	1.39	1.74	3.48	2.86	8.00	9.47	0.59	2.25	3.02	2.69	10.30	13.81	95	3.57	A	1125	A++	7.68	8.0	411
	2.0+2.0+2.5+6.0	1.28	1.28	1.60	3.84	3.00	8.00	9.66	0.63	2.21	2.86	2.86	10.12	13.08	95	3.62	A	1105	A++	7.69	8.0	410
	2.0+2.0+2.5+7.1	1.18	1.18	1.47	4.18	3.15	8.00	9.78	0.66	2.18	2.93	3.03	9.98	13.40	95	3.67	A	1090	A++	7.71	8.0	409
	2.0+2.0+3.5+3.5	1.45	1.45	2.55	2.55	2.79	8.00	9.14	0.59	2.30	2.87	2.69	10.53	13.12	95	3.49	A	1150	A++	7.74	8.0	407
	2.0+2.0+3.5+4.2	1.37	1.37	2.39	2.87	2.89	8.00	9.51	0.62	2.28	3.14	2.82	10.44	14.38	95	3.51	A	1140	A++	7.74	8.0	407
	2.0+2.0+3.5+5.0	1.28	1.28	2.24	3.20	3.00	8.00	9.66	0.63	2.22	3.16	2.86	10.17	14.46	95	3.61	A	1110	A++	7.74	8.0	407
	2.0+2.0+3.5+6.0	1.19	1.19	2.07	3.56	3.13	8.00	9.77	0.66	2.19	2.93	3.03	10.03	13.40	95	3.66	A	1095	A++	7.76	8.0	406
	2.0+2.0+4.2+4.2	1.29	1.29	2.71	2.71	2.98	8.00	9.65	0.62	2.27	3.21	2.82	10.39	14.70	95	3.53	A	1135	A++	7.75	8.0	407
	2.0+2.0+4.2+5.0	1.21	1.21	2.55	3.03	3.09	8.00	9.75	0.65	2.21	3.16	2.99	10.12	14.46	95	3.63	A	1105	A++	7.75	8.0	407
	2.0+2.0+4.2+6.0	1.13	1.13	2.37	3.38	3.23	8.00	9.79	0.66	2.18	2.93	3.03	9.98	13.40	95	3.68	A	1090	A++	7.76	8.0	406
	2.0+2.0+5.0+5.0	1.14	1.14	2.86	2.86	3.20	8.00	9.79	0.65	2.20	3.12	2.99	10.07	14.26	95	3.65	A	1100	A++	7.75	8.0	407
	2.0+2.5+2.5+2.5	1.68	2.11	2.11	2.11	2.58	8.00	8.79	0.55	1.83	2.54	2.53	8.38	11.61	95	4.39	A	915	A++	8.21	8.0	341
	2.0+2.5+2.5+3.5	1.52	1.90	1.90	2.67	2.72	8.00	9.17	0.59	2.21	2.93	2.69	10.12	13.40	95	3.62	A	1105	A++	7.75	8.0	393
	2.0+2.5+2.5+4.2	1.43	1.79	1.79	3.00	2.82	8.00	9.38	0.59	2.24	3.07	2.69	10.26	14.05	95	3.58	A	1120	A++	7.75	8.0	407
	2.0+2.5+2.5+5.0	1.33	1.67	1.67	3.33	2.93	8.00	9.58	0.63	2.18	3.09	2.86	9.98	14.13	95	3.68	A	1090	A++	7.74	8.0	407
	2.0+2.5+2.5+6.0	1.23	1.54	1.54	3.69	3.06	8.00	9.73	0.63	2.15	2.93	2.86	9.84	13.40	95	3.73	A	1075	A++	7.76	8.0	406
	2.0+2.5+2.5+7.1	1.13	1.42	1.42	4.03	3.22	8.00	9.79	0.66	2.12	2.93	3.03	9.71	13.40	95	3.78	A	1060	A++	7.77	8.0	405
	2.0+2.5+3.5+3.5	1.39	1.74	2.43	2.43	2.86	8.00	9.32	0.62	2.20	3.00	2.82	10.07	13.73	95	3.64	A	1100	A++	7.78	8.0	405
	2.0+2.5+3.5+4.2	1.31	1.64	2.30	2.75	2.95	8.00	9.66	0.62	2.19	3.21	2.82	10.03	14.70	95	3.66	A	1095	A++	7.79	8.0	405
	2.0+2.5+3.5+5.0	1.23	1.54	2.15	3.08	3.06	8.00	9.73	0.65	2.13	3.16	2.99	9.75	14.46	95	3.76	A	1065	A++	7.78	8.0	405
	2.0+2.5+3.5+6.0	1.14	1.43	2.00	3.43	3.20	8.00	9.79	0.66	2.10	2.93	3.03	9.62	13.40	95	3.81	A	1050	A++	7.79	8.0	404
	2.0+2.5+4.2+4.2	1.24	1.55	2.60	2.60	3.05	8.00	9.72	0.65	2.18	3.28	2.99	9.98	15.03	95	3.68	A	1090	A++	7.79	8.0	405
	2.0+2.5+4.2+5.0	1.17	1.46	2.45	2.92	3.16	8.00	9.78	0.65	2.12	3.23	2.99	9.71	14.79	95	3.78	A	1060	A++	7.79	8.0	405
	2.0+2.5+5.0+5.0	1.10	1.38	2.76	2.76	3.27	8.00	9.79	0.65	2.11	3.12	2.99	9.66	14.26	95	3.80	A	1055	A++	7.79	8.0	404
	2.0+3.5+3.5+3.5	1.28	2.24	2.24	2.24	3.00	8.00	9.41	0.62	2.18	2.94	2.82	9.98	13.44	95	3.68	A	1090	A++	7.81	8.0	404
	2.0+3.5+3.5+4.2	1.21	2.12	2.12	2.55	3.09	8.00	9.75	0.65	2.17	3.28	2.99	9.94	15.03	95	3.70	A	1085	A++	7.81	8.0	404
	2.0+3.5+3.5+5.0	1.14	2.00	2.00	2.86	3.20	8.00	9.79	0.65	2.11	3.23	2.99	9.66	14.79	95	3.80	A	1055	A++	7.80	8.0	404
	2.0+3.5+4.2+4.2	1.15	2.01	2.42	2.42	3.19	8.00	9.79	0.65	2.15	3.36	2.99	9.84	15.36	95	3.72	A	1075	A++	7.82	8.0	403
	2.5+2.5+2.5+2.5	2.00	2.00	2.00	2.00	2.65	8.00	9.00	0.55	2.17	2.79	2.53	9.94	12.79	95	3.70	A	1085	A++	7.78	8.0	382
	2.5+2.5+2.5+3.5	1.82	1.82	1.82	2.55	2.79	8.00	9.16	0.59	2.23	2.87	2.69	10.21	13.12	95	3.60	A	1115	A++	7.76	8.0	406
	2.5+2.5+2.5+4.2	1.71	1.71	1.71	2.87	2.89	8.00	9.51	0.62	2.21	3.14	2.82	10.12	14.38	95	3.62	A	1105	A++	7.76	8.0	406
	2.5+2.5+2.5+5.0	1.60	1.60	1.60	3.20	3.00	8.00	9.66	0.63	2.15	3.16	2.86	9.84	14.46	95	3.72	A	1075	A++	7.76	8.0	406
	2.5+2.5+2.5+6.0	1.48	1.48	1.48	3.56	3.13	8.00	9.77	0.66	2.13	2.93	3.03	9.75	13.40	95	3.77	A	1065	A++	7.77	8.0	405
	2.5+2.5+3.5+3.5	1.67	1.67	2.33	2.33	2.93	8.00	9.28	0.62	2.21	3.00	2.82	10.12	13.73	95	3.62	A	1105	A++	7.77	8.0	406
	2.5+2.5+3.5+4.2	1.57	1.57	2.20	2.65	3.02	8.00	9.69	0.62	2.20	3.28	2.82	10.07	15.03	95	3.64	A	1100	A++	7.77	8.0	406
	2.5+2.5+3.5+5.0	1.48	1.48	2.07	2.96	3.13	8.00	9.77	0.65	2.14	3.23	2.99	9.80	14.79	95	3.74	A	1070	A++	7.76	8.0	406
	2.5+2.5+3.5+6.0	1.38	1.38	1.93	3.31	3.27	8.00	9.79	0.66	2.12	2.93	3.03	9.71	13.40	95	3.79	A	1060	A++	7.78	8.0	405
	2.5+2.5+4.2+4.2	1.49	1.49	2.51	2.51	3.12	8.00	9.76	0.65	2.19	3.28	2.99	10.03	15.03	95	3.66	A	1095	A++	7.78	8.0	405
	2.5+2.5+4.2+5.0	1.41	1.41	2.37	2.82	3.23	8.00	9.79	0.65	2.13	3.23	2.99	9.75	14.79	95	3.76	A	1065	A++	7.77	8.0	406
	2.5+3.5+3.5+3.5	1.54	2.15	2.15	2.15	3.06	8.00	9.54	0.65	2.20	2.94	2.99	10.07	13.44	95	3.64	A	1100	A++	7.79	8.0	405
	2.5+3.5+3.5+4.2	1.46	2.04	2.04	2.45	3.16	8.00	9.78	0.65	2.19	3.36	2.99	10.03	15.36	95	3.66	A	1095	A++	7.79	8.0	404
	2.5+3.5+3.5+5.0	1.38	1.93	1.93	2.76	3.27	8.00	9.79	0.69	2.13	3.23	3.16	9.75	14.79	95	3.76	A	1065	A++	7.79	8.0	405
	2.5+3.5+4.2+4.2	1.39	1.94	2.33	2.33	3.26	8.00	9.79	0.69	2.18	3.36	3.16	9.98	15.36	95	3.68	A	1090	A++	7.80	8.0	404
	3.5+3.5+3.5+3.5	2.00	2.00	2.00	2.00	3.20	8.00	9.79	0.65	2.19	3.36	2.99	10.03	15.36	95	3.66	A	1095	A++	7.80	8.0	404

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
4MXM80N2V1B	1.5	1.88	---	---	---	1.25	1.88	4.10	0.29	0.51	1.23	1.33	2.34	5.63	95	---	---	---	---	---	---	---
	2.0	2.46	---	---	---	1.28	2.46	4.26	0.30	0.66	1.29	1.38	3.01	5.90	95	---	---	---	---	---	---	---
	2.5	3.08	---	---	---	1.33	3.08	4.73	0.32	0.86	1.38	1.46	3.95	6.32	95	---	---	---	---	---	---	---
	3.5	4.31	---	---	---	1.45	4.31	5.31	0.33	1.39	1.68	1.51	6.37	7.68	95	---	---	---	---	---	---	---
	4.2	---	5.18	---	---	1.49	5.18	6.16	0.34	1.63	1.90	1.55	7.45	8.70	95	---	---	---	---	---	---	---
	5.0	---	6.15	---	---	1.86	6.15	7.40	0.43	1.74	2.77	1.95	7.99	12.68	95	---	---	---	---	---	---	---
	6.0	---	7.38	---	---	2.15	7.38	9.00	0.53	2.15	3.11	2.44	9.83	14.23	95	---	---	---	---	---	---	---
	7.1	---	8.74	---	---	2.45	8.74	9.36	0.57	2.71	3.45	2.62	12.43	15.79	95	---	---	---	---	---	---	---
	1.5+1.5	1.85	1.85	---	---	1.45	3.70	7.43	0.41	0.86	1.84	1.89	3.94	8.42	95	4.31	A	A	3.88	3.27	1180	0.22
	1.5+2.0	1.84	2.46	---	---	1.51	4.30	7.81	0.41	1.01	2.00	1.89	4.63	9.15	95	4.26	A	A	3.88	3.27	1178	0.22
	1.5+2.5	1.84	3.06	---	---	1.65	4.90	8.00	0.45	1.17	2.07	2.06	5.36	9.47	95	4.19	A	A	3.89	3.27	1176	0.21
	1.5+3.5	1.83	4.27	---	---	1.94	6.10	8.55	0.52	1.64	2.36	2.37	7.51	10.80	95	3.74	A	A	3.92	3.57	1275	0.33
	1.5+4.2	1.84	5.16	---	---	2.14	7.00	8.90	0.55	1.94	2.58	2.54	8.88	11.81	95	3.62	A	A	3.92	3.57	1273	0.33
	1.5+5.0	1.85	6.15	---	---	2.38	8.00	10.43	0.50	2.11	2.92	2.28	9.66	13.36	95	3.80	A	A+	4.01	4.27	1489	0.63
	1.5+6.0	1.80	7.20	---	---	2.66	9.00	10.63	0.52	2.30	2.68	2.37	10.53	12.27	95	3.92	A	A+	4.03	4.27	1483	0.61
	1.5+7.1	1.67	7.93	---	---	2.96	9.60	10.65	0.55	2.47	2.52	2.50	11.31	11.56	95	3.89	A	A+	4.04	4.27	1477	0.59
	2.0+2.0	2.45	2.45	---	---	1.65	4.90	8.00	0.32	1.16	2.32	1.46	5.31	10.62	95	4.23	A	A	3.87	3.27	1183	0.21
	2.0+2.5	2.44	3.06	---	---	1.80	5.50	8.17	0.35	1.34	2.33	1.59	6.14	10.66	95	4.13	A	A	3.87	3.27	1181	0.21
	2.0+3.5	2.44	4.26	---	---	2.09	6.70	8.72	0.40	1.70	2.44	1.85	7.79	11.17	95	3.95	A	A	3.93	3.57	1271	0.33
	2.0+4.2	2.45	5.15	---	---	2.28	7.60	9.08	0.44	1.98	2.67	2.02	9.07	12.22	95	3.84	A	A	3.93	3.57	1269	0.33
	2.0+5.0	2.43	6.07	---	---	2.52	8.50	10.61	0.52	2.28	3.01	2.37	10.44	13.78	95	3.73	A	A+	4.04	4.27	1479	0.63
	2.0+6.0	2.33	6.98	---	---	2.79	9.30	10.80	0.54	2.42	2.75	2.45	11.08	12.59	95	3.85	A	A+	4.05	4.27	1474	0.61
	2.0+7.1	2.11	7.49	---	---	3.10	9.60	10.90	0.57	2.47	2.66	2.62	11.31	12.17	95	3.90	A	A+	4.07	4.27	1468	0.59
	2.5+2.5	3.05	3.05	---	---	1.94	6.10	8.54	0.39	1.68	2.37	1.76	7.69	10.85	95	3.64	A	A	3.88	3.27	1179	0.21
	2.5+3.5	3.04	4.26	---	---	2.23	7.30	9.10	0.52	2.02	2.67	2.37	9.25	12.22	95	3.62	A	A	3.94	3.57	1268	0.33
	2.5+4.2	3.06	5.14	---	---	2.44	8.20	9.37	0.54	2.28	2.83	2.45	10.44	12.95	95	3.60	B	A	3.95	3.57	1266	0.32
	2.5+5.0	3.00	6.00	---	---	2.66	9.00	10.70	0.54	2.51	3.10	2.45	11.49	14.19	95	3.59	B	A+	4.07	4.27	1468	0.62
	2.5+6.0	2.82	6.78	---	---	2.94	9.60	10.90	0.55	2.63	2.78	2.54	12.04	12.72	95	3.66	A	A+	4.08	4.27	1463	0.61
	2.5+7.1	2.50	7.10	---	---	3.23	9.60	10.90	0.59	2.50	2.70	2.71	11.45	12.36	95	3.85	A	A+	4.10	4.27	1457	0.59
	3.5+3.5	4.25	4.25	---	---	2.52	8.50	9.55	0.55	2.47	2.87	2.54	11.31	13.14	95	3.45	B	A+	4.04	4.27	1478	0.64
	3.5+4.2	4.09	4.91	---	---	2.71	9.00	10.16	0.57	2.69	3.33	2.62	12.32	15.25	95	3.35	C	A+	4.05	4.27	1475	0.63
	3.5+5.0	3.91	5.59	---	---	2.94	9.50	10.92	0.58	2.66	3.14	2.67	12.18	14.37	95	3.58	B	A+	4.04	4.97	1720	0.93
	3.5+6.0	3.54	6.06	---	---	3.21	9.60	11.03	0.57	2.48	2.77	2.62	11.36	12.68	95	3.88	A	A+	4.06	4.97	1714	0.91
	3.5+7.1	3.17	6.43	---	---	3.52	9.60	11.05	0.63	2.42	2.61	2.88	11.08	11.95	95	3.98	A	A+	4.07	4.97	1707	0.90
	4.2+4.2	4.75	4.75	---	---	2.91	9.50	9.98	0.59	2.55	2.58	2.71	11.68	11.82	95	3.73	A	A+	4.06	4.27	1472	0.63
	4.2+5.0	4.38	5.22	---	---	3.13	9.60	10.93	0.60	2.59	3.20	2.75	11.86	14.65	95	3.71	A	A+	4.11	4.97	1693	0.93
	4.2+6.0	3.95	5.65	---	---	3.41	9.60	11.05	0.61	2.39	2.80	2.80	10.94	12.81	95	4.03	A	A+	4.12	4.97	1686	0.91
	4.2+7.1	3.57	6.03	---	---	3.70	9.60	11.07	0.66	2.38	2.60	3.01	10.90	11.90	95	4.05	A	A+	4.14	4.97	1680	0.89
	5.0+5.0	4.80	4.80	---	---	3.35	9.60	11.10	0.63	2.46	3.12	2.88	11.26	14.28	95	3.91	A	A+	4.00	6.23	2177	1.49
	5.0+6.0	4.36	5.24	---	---	3.62	9.60	11.12	0.62	2.35	2.73	2.84	10.76	12.49	95	4.10	A	A+	4.02	6.23	2168	1.47
	5.0+7.1	3.97	5.63	---	---	3.93	9.60	11.14	0.66	2.33	2.57	3.01	10.67	11.76	95	4.13	A	A+	4.03	6.23	2160	1.45
	6.0+6.0	4.80	4.80	---	---	3.90	9.60	11.14	0.63	2.27	2.55	2.88	10.39	11.67	95	4.24	A	A+	4.03	6.23	2164	1.47
	6.0+7.1	4.40	5.20	---	---	4.20	9.60	11.16	0.67	2.26	2.54	3.05	10.35	11.62	95	4.26	A	A+	4.04	6.23	2155	1.45
	7.1+7.1	4.80	4.80	---	---	4.51	9.60	11.20	0.73	2.20	2.59	3.36	10.07	11.86	95	4.37	A	A+	4.04	6.23	2156	1.43
	1.5+1.5+1.5	1.83	1.83	1.83	---	1.80	5.50	9.95	0.40	1.14	2.27	1.85	5.22	10.39	95	4.83	A	A	3.92	4.57	1631	0.73
	1.5+1.5+2.0	1.83	1.83	2.44	---	1.94	6.10	10.13	0.41	1.32	2.35	1.89	6.05	10.76	95	4.64	A	A	3.93	4.57	1626	0.72
	1.5+1.5+2.5	1.83	1.83	3.05	---	2.09	6.70	10.21	0.43	1.49	2.38	1.98	6.82	10.89	95	4.51	A	A	3.94	4.57	1621	0.72
	1.5+1.5+3.5	1.85	1.85	4.31	---	2.38	8.00	10.32	0.47	1.88	2.50	2.15	8.61	11.44	95	4.27	A	A	3.94	5.27	1871	1.02
	1.5+1.5+4.2	1.81	1.81	5.08	---	2.58	8.70	10.32	0.49	2.15	2.50	2.24	9.84	11.44	95	4.06	A	A	3.95	5.27	1865	1.02
	1.5+1.5+5.0	1.74	1.74	5.81	---	2.79	9.30	10.49	0.50	2.21	2.58	2.28	10.12	11.81	95	4.22	A	A+	4.04	6.23	2155	1.43
	1.5+1.5+6.0	1.58	1.58	6.33	---	3.07	9.50	11.14	0.51	2.20	2.61	2.32	10.07	11.95	95	4.33	A	A+	4.08	6.23	2138	1.41
	1.5+1.5+7.1	1.43	1.43	6.75	---	3.38	9.60	11.17	0.54	2.21	2.60	2.45	10.12	11.91	95	4.35	A	A+	4.11	6.23	2122	1.40
	1.5+2.0+2.0	1.83	2.44	2.44	---	2.09	6.70	10.29	0.43	1.49	2.42	1.98	6.82	11.08	95	4.51	A	A	3.93	4.57	1624	0.72
	1.5+2.0+2.5	1.83	2.43	3.04	---	2.23	7.30	10.39	0.45	1.68	2.45	2.06	7.69	11.21	95	4.37	A	A	3.96	4.57	1615	0.72
	1.5+2.0+3.5	1.82	2.43	4.25	---	2.52	8.50	10.48	0.49	2.06	2.59	2.24	9.43	11.85	95	4.14	A	A	3.94	5.27	1869	1.02
	1.5+2.0+4.2	1.75	2.34	4.91	---	2.71	9.00	10.49	0.51	2.22	2.58	2.32	10.17	11.81	95	4.06	A	A	3.96	5.27	1863	1.01
	1.5+2.0+5.0	1.69	2.26	5.65	---	2.94	9.60	10.91	0.52	2.34	2.65	2.37	10.71	12.13	95	4.12	A	A+	4.05	6.23	2153	1.43
	1.5+2.0+6.0	1.52	2.02	6.06	---	3.21	9.60	11.14	0.53	2.22	2.61	2.41	10.17	11.95	95	4.33	A	A+	4.08	6.23	2136	1.41
	1.5+2.0+7.1	1.36	1.81	6.43	---	3.52	9.60	11.17	0.56	2.21	2.60	2.58	10.12	11.91	95	4.35	A	A+	4.11	6.23	2120	1.39
	1.5+2.5+2.5	1.85	3.08	3.08	---	2.38	8.00	10.50	0.47	1.95	2.45	2.15	8.93	11.21	95	4.11	A	A	3.97	4.57	1610	0.71
	1.5+2.5+3.5	1.80	3.00	4.20	---	2.66	9.00	10.61	0.51	2.22	2.58	2.32	10.17	11.81	95	4.07	A	A	3.97	5.27	1858	1.01
	1.5+2.5+4.2	1.76	2.93	4.92	---	2.86	9.60	10.61	0.53	2.42	2.58	2.41	11.08	11.81	95	3.97	A	A	3.98	5.27	1852	1.01
	1.5+2.5+5.0	1.60	2.67	5.33	---	3.07	9.60	11.03	0.54	2.34	2.65	2.45	10.71	12.13	95	4.12	A	A+	4.07	6.23	2140	1.43
	1.5+2.5+6.0	1.44	2.40	5.76	---	3.35	9.60	11.14	0.55	2.22	2.61	2.50	10.17	11.95	95	4.33	A	A+	4.10	6.23	2124	1.41
	1.5+2.5+7.1	1.30	2.16	6.14	---	3.65	9.60	11.17	0.58	2.21	2.60	2.67	10.12	11.91	95	4.35	A	A+	4.13	6.23	2108	1.39
	1.5+3.5+3.5	1.69	3.95	3.95	---	2.94	9.60	10.62	0.55	2.38	2.58	2.54	10.90	11.81	95	4.05	A	A+	4.01	6.23	2173	1.44
	1.5+3.5+4.2	1.57	3.65	4.38	---	3.13	9.60	10.77	0.57	2.38	2.73	2.62	10.90	12.48	95	4.05	A	A+	4.01	6.23	2174	1.43

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
	1.5+3.5+5.0	1.44	3.36	4.80	---	3.35	9.60	10.96	0.57	2.34	2.60	2.62	10.71	11.90	95	4.12	A	A+	4.05	6.23	2149	1.42
	1.5+3.5+6.0	1.31	3.05	5.24	---	3.62	9.60	11.15	0.58	2.22	2.61	2.67	10.17	11.95	95	4.33	A	A+	4.08	6.23	2133	1.40
	1.5+3.5+7.1	1.19	2.78	5.63	---	3.93	9.60	11.18	0.62	2.21	2.59	2.84	10.12	11.86	95	4.35	A	A+	4.11	6.23	2117	1.38
	1.5+4.2+4.2	1.45	4.07	4.07	---	3.33	9.60	10.78	0.59	2.38	2.73	2.71	10.90	12.48	95	4.05	A	A+	4.01	6.23	2174	1.43
	1.5+4.2+5.0	1.35	3.77	4.49	---	3.54	9.60	11.02	0.62	2.34	2.68	2.84	10.71	12.27	95	4.12	A	A+	4.07	6.23	2142	1.42
	1.5+4.2+6.0	1.23	3.45	4.92	---	3.81	9.60	11.15	0.60	2.22	2.60	2.75	10.17	11.91	95	4.33	A	A+	4.10	6.23	2126	1.40
	1.5+4.2+7.1	1.13	3.15	5.33	---	4.12	9.60	11.19	0.67	2.21	2.59	3.05	10.12	11.86	95	4.35	A	A+	4.13	6.23	2111	1.38
	1.5+5.0+5.0	1.25	4.17	4.17	---	3.76	9.60	11.04	0.62	2.25	2.64	2.84	10.30	12.08	95	4.27	A	A+	4.08	6.23	2135	1.41
	1.5+5.0+6.0	1.15	3.84	4.61	---	4.04	9.60	11.28	0.63	2.14	2.61	2.88	9.80	11.95	95	4.50	A	A+	4.11	6.23	2119	1.40
	1.5+5.0+7.1	1.06	3.53	5.01	---	4.35	9.60	11.32	0.67	2.13	2.60	3.05	9.75	11.91	95	4.52	A	A+	4.14	6.23	2104	1.38
	1.5+6.0+6.0	1.07	4.27	4.27	---	4.31	9.60	11.52	0.64	2.07	2.53	2.93	9.48	11.60	95	4.65	A	A+	4.12	6.23	2113	1.39
	2.0+2.0+2.0	2.50	2.50	2.50	---	2.23	7.50	10.47	0.45	1.73	2.49	2.06	7.92	11.40	95	4.34	A	A	3.89	4.57	1644	0.71
	2.0+2.0+2.5	2.46	2.46	3.08	---	2.38	8.00	10.55	0.47	1.87	2.53	2.15	8.56	11.58	95	4.28	A	A	3.90	4.57	1638	0.70
	2.0+2.0+3.5	2.40	2.40	4.20	---	2.66	9.00	10.66	0.51	2.21	2.66	2.32	10.12	12.17	95	4.08	A	A	3.91	5.37	1919	1.04
	2.0+2.0+4.2	2.29	2.29	4.81	---	2.86	9.40	10.66	0.53	2.41	2.62	2.41	11.03	11.99	95	3.91	A	A	3.93	5.37	1913	1.04
	2.0+2.0+5.0	2.13	2.13	5.33	---	3.07	9.60	10.90	0.54	2.38	2.73	2.45	10.90	12.49	95	4.05	A	A+	4.01	6.23	2172	1.41
	2.0+2.0+6.0	1.92	1.92	5.76	---	3.35	9.60	11.14	0.55	2.26	2.61	2.50	10.35	11.95	95	4.25	A	A+	4.04	6.23	2156	1.40
	2.0+2.0+7.1	1.73	1.73	6.14	---	3.65	9.60	11.17	0.58	2.25	2.60	2.67	10.30	11.91	95	4.27	A	A+	4.07	6.23	2140	1.38
	2.0+2.5+2.5	2.43	3.04	3.04	---	2.52	8.50	10.57	0.49	2.10	2.62	2.24	9.62	11.99	95	4.07	A	A	3.93	4.77	1697	0.79
	2.0+2.5+3.5	2.33	2.91	4.07	---	2.79	9.30	10.66	0.53	2.39	2.66	2.41	10.94	12.17	95	3.90	A	A	3.95	5.37	1902	1.04
	2.0+2.5+4.2	2.21	2.76	4.63	---	2.99	9.60	10.67	0.55	2.50	2.64	2.54	11.45	12.08	95	3.85	A	A	3.96	5.37	1896	1.04
	2.0+2.5+5.0	2.02	2.53	5.05	---	3.21	9.60	11.09	0.55	2.34	2.76	2.54	10.71	12.63	95	4.12	A	A+	4.05	6.23	2152	1.41
	2.0+2.5+6.0	1.83	2.29	5.49	---	3.49	9.60	11.14	0.56	2.22	2.61	2.58	10.17	11.95	95	4.33	A	A+	4.08	6.23	2137	1.39
	2.0+2.5+7.1	1.66	2.07	5.88	---	3.79	9.60	11.17	0.60	2.21	2.60	2.75	10.12	11.91	95	4.35	A	A+	4.11	6.23	2121	1.37
	2.0+3.5+3.5	2.13	3.73	3.73	---	3.07	9.60	10.76	0.55	2.38	2.73	2.54	10.90	12.48	95	4.05	A	A+	4.10	6.23	2124	1.42
	2.0+3.5+4.2	1.98	3.46	4.16	---	3.26	9.60	10.77	0.59	2.38	2.73	2.71	10.90	12.48	95	4.05	A	A+	4.11	6.23	2118	1.42
	2.0+3.5+5.0	1.83	3.20	4.57	---	3.49	9.60	11.14	0.59	2.34	2.83	2.71	10.71	12.95	95	4.12	A	A+	4.17	6.23	2088	1.41
	2.0+3.5+6.0	1.67	2.92	5.01	---	3.76	9.60	11.15	0.60	2.22	2.61	2.75	10.17	11.95	95	4.33	A	A+	4.20	6.23	2073	1.39
	2.0+3.5+7.1	1.52	2.67	5.41	---	4.07	9.60	11.18	0.65	2.21	2.59	2.97	10.12	11.86	95	4.35	A	A+	4.23	6.23	2058	1.37
	2.0+4.2+4.2	1.85	3.88	3.88	---	3.46	9.60	10.78	0.61	2.38	2.73	2.80	10.90	12.48	95	4.05	A	A+	4.13	6.23	2111	1.41
	2.0+4.2+5.0	1.71	3.60	4.29	---	3.68	9.60	10.91	0.64	2.34	2.68	2.93	10.71	12.26	95	4.12	A	A+	4.19	6.23	2081	1.40
	2.0+4.2+6.0	1.57	3.30	4.72	---	3.96	9.60	11.15	0.63	2.22	2.60	2.88	10.17	11.91	95	4.33	A	A+	4.22	6.23	2066	1.38
	2.0+4.2+7.1	1.44	3.03	5.12	---	4.26	9.60	11.19	0.69	2.21	2.59	3.14	10.12	11.86	95	4.35	A	A+	4.25	6.23	2052	1.37
4MXM80N2V1B	2.0+5.0+5.0	1.60	4.00	4.00	---	3.90	9.60	11.04	0.64	2.25	2.64	2.93	10.30	12.08	95	4.27	A	A+	4.20	6.23	2075	1.40
	2.0+5.0+6.0	1.48	3.69	4.43	---	4.17	9.60	11.28	0.65	2.14	2.61	2.97	9.80	11.95	95	4.50	A	A+	4.23	6.23	2060	1.38
	2.0+5.0+7.1	1.36	3.40	4.83	---	4.48	9.60	11.32	0.70	2.13	2.60	3.18	9.75	11.91	95	4.52	A	A+	4.26	6.23	2046	1.36
	2.0+6.0+6.0	1.37	4.11	4.11	---	4.45	9.60	11.52	0.66	2.07	2.53	3.01	9.48	11.60	95	4.65	A	A+	4.24	6.23	2054	1.38
	2.5+2.5+2.5	3.20	3.20	3.20	---	2.66	9.60	10.70	0.51	2.49	2.65	2.32	11.40	12.13	95	3.86	A	A+	4.04	4.77	1651	0.77
	2.5+2.5+3.5	2.82	2.82	3.95	---	2.94	9.60	10.90	0.55	2.46	2.73	2.54	11.26	12.49	95	3.91	A	A+	4.06	5.37	1850	1.03
	2.5+2.5+4.2	2.61	2.61	4.38	---	3.13	9.60	11.02	0.57	2.44	2.93	2.62	11.17	13.40	95	3.94	A	A+	4.07	5.37	1844	1.02
	2.5+2.5+5.0	2.40	2.40	4.80	---	3.35	9.60	11.10	0.57	2.35	2.79	2.62	10.76	12.77	95	4.10	A	A+	4.15	6.23	2100	1.40
	2.5+2.5+6.0	2.18	2.18	5.24	---	3.62	9.60	11.14	0.58	2.26	2.61	2.67	10.35	11.95	95	4.25	A	A+	4.18	6.23	2084	1.38
	2.5+2.5+7.1	1.98	1.98	5.63	---	3.93	9.60	11.17	0.62	2.26	2.60	2.84	10.35	11.91	95	4.25	A	A+	4.21	6.23	2069	1.36
	2.5+3.5+3.5	2.53	3.54	3.54	---	3.21	9.60	11.03	0.57	2.41	2.73	2.62	11.03	12.49	95	4.00	A	A+	4.10	6.23	2124	1.41
	2.5+3.5+4.2	2.35	3.29	3.95	---	3.41	9.60	11.04	0.61	2.39	2.72	2.80	10.94	12.45	95	4.03	A	A+	4.11	6.23	2118	1.40
	2.5+3.5+5.0	2.18	3.05	4.36	---	3.62	9.60	11.10	0.62	2.30	2.75	2.84	10.53	12.59	95	4.19	A	A+	4.17	6.23	2087	1.39
	2.5+3.5+6.0	2.00	2.80	4.80	---	3.90	9.60	11.15	0.63	2.25	2.61	2.88	10.30	11.95	95	4.27	A	A+	4.20	6.23	2072	1.37
	2.5+3.5+7.1	1.83	2.56	5.20	---	4.20	9.60	11.18	0.67	2.21	2.59	3.05	10.12	11.86	95	4.35	A	A+	4.23	6.23	2058	1.35
	2.5+4.2+4.2	2.20	3.70	3.70	---	3.60	9.60	11.04	0.64	2.37	2.72	2.93	10.85	12.45	95	4.06	A	A+	4.13	6.23	2111	1.40
	2.5+4.2+5.0	2.05	3.45	4.10	---	3.81	9.60	11.10	0.66	2.28	2.57	3.01	10.44	11.76	95	4.22	A	A+	4.19	6.23	2081	1.39
	2.5+4.2+6.0	1.89	3.17	4.54	---	4.09	9.60	11.15	0.65	2.24	2.60	2.97	10.26	11.91	95	4.30	A	A+	4.22	6.23	2066	1.37
	2.5+4.2+7.1	1.74	2.92	4.94	---	4.40	9.60	11.19	0.71	2.20	2.59	3.27	10.07	11.86	95	4.38	A	A+	4.25	6.23	2052	1.35
	2.5+5.0+5.0	1.92	3.84	3.84	---	4.04	9.60	11.04	0.67	2.26	2.64	3.05	10.35	12.08	95	4.25	A	A+	4.20	6.23	2074	1.38
	2.5+5.0+6.0	1.78	3.56	4.27	---	4.31	9.60	11.28	0.68	2.18	2.61	3.10	9.98	11.95	95	4.42	A	A+	4.23	6.23	2059	1.37
	2.5+6.0+6.0	1.66	3.97	3.97	---	4.59	9.60	11.52	0.68	2.11	2.53	3.10	9.66	11.60	95	4.57	A	A+	4.27	6.23	2042	1.36
	3.5+3.5+3.5	3.20	3.20	3.20	---	3.49	9.60	11.09	0.61	2.42	2.80	2.80	11.08	12.81	95	3.97	A	A+	4.13	6.23	2107	1.38
	3.5+3.5+4.2	3.00	3.00	3.60	---	3.68	9.60	11.09	0.66	2.40	2.61	3.01	10.99	11.95	95	4.00	A	A+	4.15	6.23	2101	1.38
	3.5+3.5+5.0	2.80	2.80	4.00	---	3.90	9.60	11.10	0.66	2.37	2.57	3.01	10.85	11.76	95	4.06	A	A+	4.21	6.23	2072	1.37
	3.5+3.5+6.0	2.58	2.58	4.43	---	4.17	9.60	11.15	0.67	2.22	2.60	3.05	10.17	11.91	95	4.33	A	A+	4.24	6.23	2057	1.35
	3.5+3.5+7.1	2.38	2.38	4.83	---	4.48	9.60	11.19	0.71	2.21	2.59	3.27	10.12	11.86	95	4.35	A	A+	4.26	6.23	2043	1.33
	3.5+4.2+4.2	2.82	3.39	3.39	---	3.88	9.60	10.80	0.68	2.38	2.72	3.10	10.90	12.43	95	4.05	A	A+	4.16	6.23	2094	1.37
	3.5+4.2+5.0	2.65	3.17	3.78	---	4.09	9.60	10.92	0.71	2.35	2.68	3.23	10.76	12.26	95	4.10	A	A+	4.22	6.23	2065	1.36
	3.5+4.2+6.0	2.45	2.94	4.20	---	4.37	9.60	11.16	0.70	2.21	2.60	3.18	10.12	11.91	95	4.35	A	A+	4.25	6.23	2051	1.34
	3.5+5.0+5.0	2.49	3.56	3.56	---	4.31	9.60	11.06	0.71	2.25	2.64	3.27	10.30	12.08	95	4.27	A	A+	4.27	6.23	2039	1.36
	3.5+5.0+6.0	2.32	3.31	3.97	---	4.59	9.60	11.29	0.72	2.14	2.61	3.31	9.80	11.95	95	4.50	A	A+	4.30	6.23	2025	1.34
	4.2+4.2+4.2	3.20	3.20	3.20	---	4.07	9.60	10.80	0.71	2.36	2.72	3.23	10.81	12.43	95	4.07	A	A+	4.24	6.23	2056	1.37
	4.2+4.2+5.0	3.01	3.01	3.58	---	4.28	9.60	10.93	0.73	2.33	2.68	3.36	10.67	12.26	95	4.13	A	A+	4.30	6.23	2028	1.36

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
4MXM80N2V1B	4.2+4.2+6.0	2.80	2.80	4.00	---	4.56	9.60	11.17	0.74	2.21	2.60	3.40	10.12	11.91	95	4.35	A	A+	4.33	6.23	2014	1.34
	4.2+5.0+5.0	2.84	3.38	3.38	---	4.51	9.60	11.07	0.76	2.24	2.63	3.48	10.26	12.04	95	4.29	A	A+	4.33	6.23	2014	1.35
	1.5+1.5+1.5+1.5	1.83	1.83	1.83	1.83	2.23	7.30	10.10	0.39	1.61	2.13	1.76	7.37	9.75	95	4.56	A	A+	4.04	6.23	2157	1.40
	1.5+1.5+1.5+2.0	1.85	1.85	1.85	2.46	2.38	8.00	10.28	0.39	1.81	2.20	1.81	8.29	10.07	95	4.43	A	A+	4.04	6.23	2159	1.39
	1.5+1.5+1.5+2.5	1.82	1.82	1.82	3.04	2.52	8.50	10.39	0.41	1.95	2.21	1.89	8.93	10.11	95	4.37	A	A+	4.05	6.23	2151	1.39
	1.5+1.5+1.5+3.5	1.74	1.74	1.74	4.07	2.79	9.30	10.59	0.45	2.13	2.41	2.06	9.75	11.03	95	4.37	A	A+	4.08	6.23	2134	1.38
	1.5+1.5+1.5+4.2	1.66	1.66	1.66	4.63	2.99	9.60	11.16	0.48	2.21	2.60	2.19	10.12	11.91	95	4.35	A	A+	4.10	6.23	2126	1.38
	1.5+1.5+1.5+5.0	1.52	1.52	1.52	5.05	3.21	9.60	11.29	0.49	2.14	2.61	2.24	9.80	11.95	95	4.50	A	A+	4.17	6.23	2089	1.37
	1.5+1.5+1.5+6.0	1.37	1.37	1.37	5.49	3.49	9.60	11.53	0.49	2.06	2.53	2.24	9.43	11.60	95	4.67	A	A+	4.20	6.23	2072	1.36
	1.5+1.5+1.5+7.1	1.24	1.24	1.24	5.88	3.79	9.60	11.56	0.53	2.05	2.52	2.41	9.39	11.56	95	4.69	A	A+	4.24	6.23	2056	1.36
	1.5+1.5+2.0+2.0	1.82	1.82	2.43	2.43	2.52	8.50	10.47	0.41	1.99	2.27	1.89	9.11	10.39	95	4.28	A	A+	4.14	6.23	2106	1.39
	1.5+1.5+2.0+2.5	1.80	1.80	2.40	3.00	2.66	9.00	10.57	0.43	2.14	2.31	1.98	9.80	10.57	95	4.22	A	A+	4.15	6.23	2098	1.38
	1.5+1.5+2.0+3.5	1.69	1.69	2.26	3.95	2.94	9.60	10.67	0.49	2.22	2.30	2.24	10.17	10.53	95	4.33	A	A+	4.18	6.23	2082	1.38
	1.5+1.5+2.0+4.2	1.57	1.57	2.09	4.38	3.13	9.60	11.16	0.50	2.21	2.60	2.28	10.12	11.91	95	4.35	A	A+	4.20	6.23	2075	1.37
	1.5+1.5+2.0+5.0	1.44	1.44	1.92	4.80	3.35	9.60	11.29	0.51	2.14	2.61	2.32	9.80	11.95	95	4.50	A	A+	4.27	6.23	2041	1.36
	1.5+1.5+2.0+6.0	1.31	1.31	1.75	5.24	3.62	9.60	11.53	0.51	2.06	2.53	2.32	9.43	11.60	95	4.67	A	A+	4.30	6.23	2025	1.36
	1.5+1.5+2.0+7.1	1.19	1.19	1.59	5.63	3.93	9.60	11.56	0.55	2.05	2.52	2.50	9.39	11.56	95	4.69	A	A+	4.34	6.23	2009	1.35
	1.5+1.5+2.5+2.5	1.80	1.80	3.00	3.00	2.79	9.60	10.58	0.45	2.21	2.41	2.06	10.12	11.03	95	4.35	A	A+	4.17	6.23	2089	1.38
	1.5+1.5+2.5+3.5	1.60	1.60	2.67	3.73	3.07	9.60	11.15	0.51	2.22	2.60	2.32	10.17	11.91	95	4.33	A	A+	4.20	6.23	2074	1.37
	1.5+1.5+2.5+4.2	1.48	1.48	2.47	4.16	3.26	9.60	11.16	0.52	2.21	2.60	2.37	10.12	11.91	95	4.35	A	A+	4.22	6.23	2066	1.37
	1.5+1.5+2.5+5.0	1.37	1.37	2.29	4.57	3.49	9.60	11.29	0.53	2.14	2.61	2.41	9.80	11.95	95	4.50	A	A+	4.29	6.23	2032	1.36
	1.5+1.5+2.5+6.0	1.25	1.25	2.09	5.01	3.76	9.60	11.53	0.54	2.06	2.53	2.45	9.43	11.60	95	4.67	A	A+	4.32	6.23	2017	1.35
	1.5+1.5+2.5+7.1	1.14	1.14	1.90	5.41	4.07	9.60	11.56	0.58	2.05	2.52	2.67	9.39	11.56	95	4.69	A	A+	4.35	6.23	2001	1.35
	1.5+1.5+3.5+3.5	1.44	1.44	3.36	3.36	3.35	9.60	11.16	0.55	2.21	2.60	2.50	10.12	11.91	95	4.35	A	A+	4.22	6.23	2066	1.37
	1.5+1.5+3.5+4.2	1.35	1.35	3.14	3.77	3.54	9.60	11.17	0.56	2.21	2.60	2.58	10.12	11.91	95	4.35	A	A+	4.23	6.23	2058	1.37
	1.5+1.5+3.5+5.0	1.25	1.25	2.92	4.17	3.76	9.60	11.29	0.58	2.13	2.60	2.67	9.75	11.91	95	4.52	A	A+	4.30	6.23	2024	1.35
	1.5+1.5+3.5+6.0	1.15	1.15	2.69	4.61	4.04	9.60	11.53	0.57	2.06	2.52	2.62	9.43	11.56	95	4.67	A	A+	4.34	6.23	2009	1.35
	1.5+1.5+3.5+7.1	1.06	1.06	2.47	5.01	4.35	9.60	11.58	0.63	2.05	2.52	2.88	9.39	11.51	95	4.69	A	A+	4.37	6.23	1994	1.35
	1.5+1.5+4.2+4.2	1.26	1.26	3.54	3.54	3.73	9.60	11.18	0.60	2.21	2.59	2.75	10.12	11.86	95	4.35	A	A+	4.25	6.23	2050	1.36
	1.5+1.5+4.2+5.0	1.18	1.18	3.30	3.93	3.96	9.60	11.30	0.60	2.13	2.60	2.75	9.75	11.91	95	4.52	A	A+	4.32	6.23	2017	1.35
	1.5+1.5+4.2+6.0	1.09	1.09	3.05	4.36	4.23	9.60	11.54	0.61	2.06	2.52	2.80	9.43	11.56	95	4.67	A	A+	4.35	6.23	2001	1.35
	1.5+1.5+4.2+7.1	1.01	1.01	2.82	4.77	4.54	9.60	11.58	0.65	2.05	2.52	2.97	9.39	11.51	95	4.69	A	A+	4.39	6.23	1986	1.34
	1.5+1.5+5.0+5.0	1.11	1.11	3.69	3.69	4.17	9.60	11.44	0.63	2.09	2.56	2.88	9.57	11.73	95	4.61	A	A+	4.34	6.23	2009	1.35
	1.5+1.5+5.0+6.0	1.03	1.03	3.43	4.11	4.45	9.60	11.68	0.63	1.97	2.49	2.88	9.02	11.38	95	4.88	A	A+	4.37	6.23	1993	1.34
	1.5+2.0+2.0+2.0	1.90	2.53	2.53	2.53	2.66	9.50	10.66	0.43	2.26	2.35	1.98	10.35	10.76	95	4.21	A	A+	4.10	6.23	2125	1.38
	1.5+2.0+2.0+2.5	1.80	2.40	2.40	3.00	2.79	9.60	10.75	0.45	2.26	2.36	2.06	10.35	10.80	95	4.25	A	A+	4.11	6.23	2122	1.38
	1.5+2.0+2.0+3.5	1.60	2.13	2.13	3.73	3.07	9.60	11.15	0.51	2.25	2.60	2.32	10.30	11.91	95	4.28	A	A+	4.12	6.23	2116	1.37
	1.5+2.0+2.0+4.2	1.48	1.98	1.98	4.16	3.26	9.60	11.16	0.52	2.23	2.60	2.37	10.21	11.91	95	4.31	A	A+	4.12	6.23	2113	1.37
	1.5+2.0+2.0+5.0	1.37	1.83	1.83	4.57	3.49	9.60	11.29	0.53	2.14	2.61	2.41	9.80	11.95	95	4.50	A	A+	4.19	6.23	2078	1.35
	1.5+2.0+2.0+6.0	1.25	1.67	1.67	5.01	3.76	9.60	11.53	0.54	2.06	2.53	2.45	9.43	11.60	95	4.67	A	A+	4.23	6.23	2061	1.35
	1.5+2.0+2.0+7.1	1.14	1.52	1.52	5.41	4.07	9.60	11.56	0.58	2.05	2.52	2.67	9.39	11.56	95	4.69	A	A+	4.26	6.23	2045	1.35
	1.5+2.0+2.5+2.5	1.69	2.26	2.82	2.82	2.94	9.60	10.75	0.49	2.22	2.31	2.24	10.17	10.57	95	4.33	A	A+	4.10	6.23	2128	1.37
	1.5+2.0+2.5+3.5	1.52	2.02	2.53	3.54	3.21	9.60	11.15	0.53	2.22	2.60	2.41	10.17	11.91	95	4.33	A	A+	4.13	6.23	2112	1.37
	1.5+2.0+2.5+4.2	1.41	1.88	2.35	3.95	3.41	9.60	11.16	0.55	2.21	2.60	2.50	10.12	11.91	95	4.35	A	A+	4.14	6.23	2104	1.36
	1.5+2.0+2.5+5.0	1.31	1.75	2.18	4.36	3.62	9.60	11.29	0.56	2.14	2.61	2.58	9.80	11.95	95	4.50	A	A+	4.21	6.23	2069	1.35
	1.5+2.0+2.5+6.0	1.20	1.60	2.00	4.80	3.90	9.60	11.53	0.55	2.06	2.53	2.54	9.43	11.60	95	4.67	A	A+	4.24	6.23	2053	1.35
	1.5+2.0+2.5+7.1	1.10	1.47	1.83	5.20	4.20	9.60	11.56	0.61	2.05	2.52	2.80	9.39	11.56	95	4.69	A	A+	4.28	6.23	2038	1.34
	1.5+2.0+3.5+3.5	1.37	1.83	3.20	3.20	3.49	9.60	11.16	0.56	2.21	2.60	2.58	10.12	11.91	95	4.35	A	A+	4.14	6.23	2103	1.36
	1.5+2.0+3.5+4.2	1.29	1.71	3.00	3.60	3.68	9.60	11.17	0.58	2.21	2.60	2.67	10.12	11.91	95	4.35	A	A+	4.16	6.23	2096	1.36
	1.5+2.0+3.5+5.0	1.20	1.60	2.80	4.00	3.90	9.60	11.29	0.60	2.13	2.60	2.75	9.75	11.91	95	4.52	A	A+	4.23	6.23	2061	1.35
	1.5+2.0+3.5+6.0	1.11	1.48	2.58	4.43	4.17	9.60	11.53	0.61	2.06	2.52	2.80	9.43	11.56	95	4.67	A	A+	4.26	6.23	2045	1.34
	1.5+2.0+3.5+7.1	1.02	1.36	2.38	4.83	4.48	9.60	11.58	0.65	2.05	2.52	2.97	9.39	11.51	95	4.69	A	A+	4.29	6.23	2030	1.34
	1.5+2.0+4.2+4.2	1.21	1.61	3.39	3.39	3.88	9.60	11.18	0.62	2.25	2.59	2.84	10.30	11.86	95	4.27	A	A+	4.17	6.23	2087	1.35
	1.5+2.0+4.2+5.0	1.13	1.51	3.17	3.78	4.09	9.60	11.30	0.63	2.13	2.60	2.88	9.75	11.91	95	4.52	A	A+	4.24	6.23	2053	1.34
	1.5+2.0+4.2+6.0	1.05	1.40	2.94	4.20	4.37	9.60	11.54	0.63	2.06	2.52	2.88	9.43	11.56	95	4.67	A	A+	4.28	6.23	2037	1.34
	1.5+2.0+5.0+5.0	1.07	1.42	3.56	3.56	4.31	9.60	11.44	0.65	2.09	2.56	2.97	9.57	11.73	95	4.61	A	A+	4.40	6.23	1979	1.34
	1.5+2.0+5.0+6.0	0.99	1.32	3.31	3.97	4.59	9.60	11.68	0.66	1.97	2.49	3.01	9.02	11.38	95	4.88	A	A+	4.44	6.23	1964	1.34
	1.5+2.5+2.5+2.5	1.60	2.67	2.67	2.67	3.07	9.60	11.14	0.51	2.22	2.61	2.32	10.17	11.95	95	4.33	A	A+	4.09	6.23	2129	1.36
	1.5+2.5+2.5+3.5	1.44	2.40	2.40	3.36	3.35	9.60	11.15	0.55	2.22	2.60	2.50	10.17	11.91	95	4.33	A	A+	4.12	6.23	2113	1.35
	1.5+2.5+2.5+4.2	1.35	2.24	2.24	3.77	3.54	9.60	11.16	0.56	2.21	2.60	2.58	10.12	11.91	95	4.35	A	A+	4.14	6.23	2105	1.35
	1.5+2.5+2.5+5.0	1.25	2.09	2.09	4.17	3.76	9.60	11.29	0.58	2.14	2.61	2.67	9.80	11.95	95	4.50	A	A+	4.21	6.23	2070	1.34
	1.5+2.5+2.5+6.0	1.15	1.92	1.92	4.61	4.04	9.60	11.53	0.57	2.06	2.53	2.62	9.43	11.60	95	4.67	A	A+	4.24	6.23	2054	1.33
	1.5+2.5+2.5+7.1	1.06	1.76	1.76	5.01	4.35	9.60	11.56	0.63	2.05	2.52	2.88	9.39	11.56	95	4.69	A	A+	4.28	6.23	2038	1.33
	1.5+2.5+3.5+3.5	1.31	2.18	3.05	3.05	3.62	9.60	11.16	0.58	2.21	2.60	2.67	10.12	11.91	95	4.35	A	A+	4.14	6.23	2104	1.35
	1.5+2.5+3.5+4.2	1.23	2.05	2.87	3.45	3.81	9.60	11.17	0.60	2.24	2.60	2.75	10.26	11.91	95	4.29	A	A+	4.15	6.23	2101	1.34
	1.5+2.5+3.5+5.0	1.15	1.92	2.69	3.84	4.04	9.60	11.29	0.63	2.13	2.60	2.88	9.75	11.91	95	4.52	A	A+	4.22	6.23	2066	1.33

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)				Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
4MXM80N2V1B	1.5+2.5+3.5+6.0	1.07	1.78	2.49	4.27	4.31	9.60	11.53	0.63	2.06	2.52	2.88	9.43	11.56	95	4.67	A	A+	4.45	6.23	1960	1.33
	1.5+2.5+4.2+4.2	1.16	1.94	3.25	3.25	4.01	9.60	11.18	0.65	2.25	2.59	2.97	10.30	11.86	95	4.28	A	A+	4.15	6.23	2099	1.34
	1.5+2.5+4.2+5.0	1.09	1.82	3.05	3.64	4.23	9.60	11.30	0.65	2.16	2.60	2.97	9.89	11.91	95	4.45	A	A+	4.20	6.23	2077	1.33
	1.5+2.5+4.2+6.0	1.01	1.69	2.84	4.06	4.51	9.60	11.54	0.66	2.06	2.52	3.01	9.43	11.56	95	4.67	A	A+	4.23	6.23	2061	1.32
	1.5+2.5+5.0+5.0	1.03	1.71	3.43	3.43	4.45	9.60	11.44	0.67	2.09	2.56	3.05	9.57	11.73	95	4.61	A	A+	4.26	6.23	2047	1.32
	1.5+3.5+3.5+3.5	1.20	2.80	2.80	2.80	3.90	9.60	11.17	0.62	2.21	2.60	2.84	10.12	11.91	95	4.35	A	A+	4.23	6.23	2062	1.31
	1.5+3.5+3.5+4.2	1.13	2.65	2.65	3.17	4.09	9.60	11.18	0.65	2.25	2.59	2.97	10.30	11.86	95	4.27	A	A+	4.24	6.23	2054	1.31
	1.5+3.5+3.5+5.0	1.07	2.49	2.49	3.56	4.31	9.60	11.30	0.67	2.13	2.60	3.05	9.75	11.91	95	4.52	A	A+	4.31	6.23	2021	1.30
	1.5+3.5+3.5+6.0	0.99	2.32	2.32	3.97	4.59	9.60	11.54	0.68	2.06	2.52	3.10	9.43	11.56	95	4.67	A	A+	4.35	6.23	2005	1.29
	1.5+3.5+4.2+4.2	1.07	2.51	3.01	3.01	4.28	9.60	11.18	0.69	2.25	2.59	3.14	10.30	11.86	95	4.28	A	A+	4.23	6.23	2058	1.31
	1.5+3.5+4.2+5.0	1.01	2.37	2.84	3.38	4.51	9.60	11.32	0.70	2.16	2.60	3.18	9.89	11.91	95	4.45	A	A+	4.30	6.23	2025	1.29
	1.5+4.2+4.2+4.2	1.02	2.86	2.86	2.86	4.48	9.60	11.19	0.71	2.23	2.59	3.27	10.21	11.86	95	4.32	A	A+	4.30	6.23	2026	1.30
	2.0+2.0+2.0+2.0	2.40	2.40	2.40	2.40	2.79	9.60	10.84	0.45	1.94	2.41	2.06	8.88	11.03	95	4.97	A	A+	4.55	6.23	1915	1.37
	2.0+2.0+2.0+2.5	2.26	2.26	2.26	2.82	2.94	9.60	10.93	0.49	2.35	2.42	2.24	10.76	11.08	95	4.09	A	A+	4.57	6.23	1908	1.37
	2.0+2.0+2.0+3.5	2.02	2.02	2.02	3.54	3.21	9.60	11.15	0.53	2.22	2.60	2.41	10.17	11.91	95	4.33	A	A++	4.60	6.23	1894	1.36
	2.0+2.0+2.0+4.2	1.88	1.88	1.88	3.95	3.41	9.60	11.16	0.55	2.21	2.60	2.50	10.12	11.91	95	4.35	A	A++	4.62	6.23	1887	1.36
	2.0+2.0+2.0+5.0	1.75	1.75	1.75	4.36	3.62	9.60	11.29	0.56	2.14	2.61	2.58	9.80	11.95	95	4.50	A	A++	4.69	6.23	1857	1.35
	2.0+2.0+2.0+6.0	1.60	1.60	1.60	4.80	3.90	9.60	11.53	0.55	2.06	2.53	2.54	9.43	11.60	95	4.67	A	A++	4.73	6.23	1843	1.34
	2.0+2.0+2.0+7.1	1.47	1.47	1.47	5.20	4.20	9.60	11.56	0.61	2.05	2.52	2.80	9.39	11.56	95	4.69	A	A++	4.77	6.23	1829	1.34
	2.0+2.0+2.5+2.5	2.13	2.13	2.67	2.67	3.07	9.60	11.14	0.51	2.22	2.61	2.32	10.17	11.95	95	4.33	A	A+	4.59	6.23	1900	1.37
	2.0+2.0+2.5+3.5	1.92	1.92	2.40	3.36	3.35	9.60	11.15	0.55	2.22	2.60	2.50	10.17	11.91	95	4.33	A	A++	4.62	6.23	1887	1.36
	2.0+2.0+2.5+4.2	1.79	1.79	2.24	3.77	3.54	9.60	11.16	0.56	2.21	2.60	2.58	10.12	11.91	95	4.35	A	A++	4.64	6.23	1880	1.35
	2.0+2.0+2.5+5.0	1.67	1.67	2.09	4.17	3.76	9.60	11.29	0.58	2.14	2.61	2.67	9.80	11.95	95	4.50	A	A++	4.71	6.23	1850	1.34
	2.0+2.0+2.5+6.0	1.54	1.54	1.92	4.61	4.04	9.60	11.53	0.57	2.06	2.53	2.62	9.43	11.60	95	4.67	A	A++	4.75	6.23	1836	1.34
	2.0+2.0+2.5+7.1	1.41	1.41	1.76	5.01	4.35	9.60	11.56	0.63	2.05	2.52	2.88	9.39	11.56	95	4.69	A	A++	4.78	6.23	1822	1.34
	2.0+2.0+3.5+3.5	1.75	1.75	3.05	3.05	3.62	9.60	11.16	0.58	2.21	2.60	2.67	10.12	11.91	95	4.35	A	A++	4.64	6.23	1879	1.35
	2.0+2.0+3.5+4.2	1.64	1.64	2.87	3.45	3.81	9.60	11.17	0.60	2.26	2.60	2.75	10.35	11.91	95	4.25	A	A++	4.65	6.23	1872	1.35
	2.0+2.0+3.5+5.0	1.54	1.54	2.69	3.84	4.04	9.60	11.29	0.63	2.13	2.60	2.88	9.75	11.91	95	4.52	A	A++	4.73	6.23	1843	1.34
	2.0+2.0+3.5+6.0	1.42	1.42	2.49	4.27	4.31	9.60	11.53	0.63	2.06	2.52	2.88	9.43	11.56	95	4.67	A	A++	4.77	6.23	1829	1.34
	2.0+2.0+4.2+4.2	1.55	1.55	3.25	3.25	4.01	9.60	11.18	0.62	2.25	2.59	2.84	10.30	11.86	95	4.28	A	A++	4.67	6.23	1865	1.35
	2.0+2.0+4.2+5.0	1.45	1.45	3.05	3.64	4.23	9.60	11.30	0.65	2.16	2.60	2.97	9.89	11.91	95	4.45	A	A++	4.75	6.23	1835	1.34
	2.0+2.0+4.2+6.0	1.35	1.35	2.84	4.06	4.51	9.60	11.54	0.66	2.06	2.52	3.01	9.43	11.56	95	4.67	A	A++	4.78	6.23	1822	1.33
	2.0+2.0+5.0+5.0	1.37	1.37	3.43	3.43	4.45	9.60	11.44	0.68	2.09	2.56	3.10	9.57	11.73	95	4.61	A	A++	4.77	6.23	1828	1.33
	2.0+2.5+2.5+2.5	2.02	2.53	2.53	2.53	3.21	9.60	11.14	0.53	2.22	2.61	2.41	10.17	11.95	95	4.33	A	A++	4.61	6.23	1892	1.35
	2.0+2.5+2.5+3.5	1.83	2.29	2.29	3.20	3.49	9.60	11.15	0.56	2.22	2.60	2.58	10.17	11.91	95	4.33	A	A++	4.64	6.23	1879	1.34
	2.0+2.5+2.5+4.2	1.71	2.14	2.14	3.60	3.68	9.60	11.16	0.58	2.26	2.60	2.67	10.35	11.91	95	4.25	A	A++	4.66	6.23	1872	1.34
	2.0+2.5+2.5+5.0	1.60	2.00	2.00	4.00	3.90	9.60	11.29	0.61	2.18	2.61	2.80	9.98	11.95	95	4.41	A	A++	4.73	6.23	1842	1.33
	2.0+2.5+2.5+6.0	1.48	1.85	1.85	4.43	4.17	9.60	11.53	0.61	2.06	2.53	2.80	9.43	11.60	95	4.67	A	A++	4.77	6.23	1828	1.32
	2.0+2.5+2.5+7.1	1.36	1.70	1.70	4.83	4.48	9.60	11.56	0.65	2.05	2.52	2.97	9.39	11.56	95	4.69	A	A++	4.80	6.23	1815	1.32
	2.0+2.5+3.5+3.5	1.67	2.09	2.92	2.92	3.76	9.60	11.16	0.60	2.25	2.60	2.75	10.30	11.91	95	4.27	A	A++	4.66	6.23	1871	1.34
	2.0+2.5+3.5+4.2	1.57	1.97	2.75	3.30	3.96	9.60	11.17	0.62	2.24	2.60	2.84	10.26	11.91	95	4.29	A	A++	4.67	6.23	1864	1.34
	2.0+2.5+3.5+5.0	1.48	1.85	2.58	3.69	4.17	9.60	11.29	0.65	2.16	2.60	2.97	9.89	11.91	95	4.45	A	A++	4.75	6.23	1835	1.32
	2.0+2.5+3.5+6.0	1.37	1.71	2.40	4.11	4.45	9.60	11.53	0.66	2.06	2.52	3.01	9.43	11.56	95	4.67	A	A++	4.79	6.23	1821	1.32
	2.0+2.5+4.2+4.2	1.49	1.86	3.13	3.13	4.15	9.60	11.18	0.65	2.23	2.59	2.97	10.21	11.86	95	4.32	A	A++	4.69	6.23	1857	1.33
	2.0+2.5+4.2+5.0	1.40	1.75	2.94	3.50	4.37	9.60	11.30	0.67	2.15	2.60	3.05	9.84	11.91	95	4.48	A	A++	4.77	6.23	1828	1.32
	2.0+2.5+5.0+5.0	1.32	1.66	3.31	3.31	4.59	9.60	11.44	0.70	2.12	2.56	3.18	9.71	11.73	95	4.53	A	A++	4.79	6.23	1821	1.32
	2.0+3.5+3.5+3.5	1.54	2.69	2.69	2.69	4.04	9.60	11.17	0.65	2.11	2.60	2.97	9.66	11.91	95	4.55	A	A++	4.66	6.23	1869	1.31
	2.0+3.5+3.5+4.2	1.45	2.55	2.55	3.05	4.23	9.60	11.18	0.67	2.25	2.59	3.05	10.30	11.86	95	4.28	A	A++	4.68	6.23	1862	1.30
	2.0+3.5+3.5+5.0	1.37	2.40	2.40	3.43	4.45	9.60	11.30	0.70	2.16	2.60	3.18	9.89	11.91	95	4.45	A	A++	4.76	6.23	1833	1.29
	2.0+3.5+4.2+4.2	1.38	2.42	2.90	2.90	4.43	9.60	11.18	0.71	2.23	2.59	3.27	10.21	11.86	95	4.32	A	A++	4.70	6.23	1855	1.30
	2.5+2.5+2.5+2.5	2.40	2.40	2.40	2.40	3.35	9.60	11.14	0.55	2.22	2.61	2.50	10.17	11.95	95	4.33	A	A++	4.62	6.23	1884	1.34
	2.5+2.5+2.5+3.5	2.18	2.18	2.18	3.05	3.62	9.60	11.15	0.58	2.26	2.60	2.67	10.35	11.91	95	4.25	A	A++	4.66	6.23	1871	1.34
	2.5+2.5+2.5+4.2	2.05	2.05	2.05	3.45	3.81	9.60	11.16	0.60	2.25	2.60	2.75	10.30	11.91	95	4.28	A	A++	4.68	6.23	1864	1.33
	2.5+2.5+2.5+5.0	1.92	1.92	1.92	3.84	4.04	9.60	11.29	0.63	2.16	2.61	2.88	9.89	11.95	95	4.45	A	A++	4.75	6.23	1835	1.32
	2.5+2.5+2.5+6.0	1.78	1.78	1.78	4.27	4.31	9.60	11.53	0.64	2.06	2.53	2.93	9.43	11.60	95	4.67	A	A++	4.79	6.23	1821	1.32
	2.5+2.5+3.5+3.5	2.00	2.00	2.80	2.80	3.90	9.60	11.16	0.63	2.25	2.60	2.88	10.30	11.91	95	4.28	A	A++	4.68	6.23	1863	1.33
	2.5+2.5+3.5+4.2	1.89	1.89	2.65	3.17	4.09	9.60	11.17	0.65	2.23	2.60	2.97	10.21	11.91	95	4.32	A	A++	4.69	6.23	1857	1.33
	2.5+2.5+3.5+5.0	1.78	1.78	2.49	3.56	4.31	9.60	11.29	0.67	2.15	2.60	3.05	9.84	11.91	95	4.48	A	A++	4.77	6.23	1828	1.32
	2.5+2.5+3.5+6.0	1.66	1.66	2.32	3.97	4.59	9.60	11.53	0.68	2.06	2.52	3.10	9.43	11.56	95	4.67	A	A++	4.80	6.23	1814	1.31
	2.5+2.5+4.2+4.2	1.79	1.79	3.01	3.01	4.28	9.60	11.18	0.67	2.21	2.59	3.05	10.12	11.86	95	4.35	A	A++	4.71	6.23	1850	1.32
	2.5+2.5+4.2+5.0	1.69	1.69	2.84	3.38	4.51	9.60	11.30	0.71	2.13	2.60	3.27	9.75	11.91	95	4.51	A	A++	4.79	6.23	1821	1.31
	2.5+3.5+3.5+3.5	1.85	2.58	2.58	2.58	4.17	9.60	11.17	0.67	2.25	2.60	3.05	10.30	11.91	95	4.28	A	A++	4.68	6.23	1861	1.30
	2.5+3.5+3.5+4.2	1.75	2.45	2.45	2.94	4.37	9.60	11.18	0.70	2.23	2.59	3.18	10.21	11.86	95	4.32	A	A++	4.70	6.23	1855	1.29
	2.5+3.5+3.5+5.0	1.66	2.32	2.32	3.31	4.59	9.60	11.30	0.71	2.15	2.60	3.27	9.84	11.91	95	4.48	A	A++	4.77	6.23	1826	1.28
	2.5+3.5+4.2+4.2	1.67	2.33	2.80	2.80	4.56	9.60	11.18	0.73	2.21	2.59	3.36	10.12	11.86	95	4.35	A	A++	4.72	6.23	1847	1.29
	3.5+3.5+3.5+3.5	2.40	2.40	2.40	2.40	4.45	9.60	11.18	0.71	2.19	2.59	3.27	10.03	11.86	95	4.40	A	A++	4.75	6.23	1835	1.29

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	E room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
5MXM90N2V1B	1.5	1.80	---	---	---	---	1.78	1.80	2.98	0.43	0.48	0.93	1.95	2.20	4.26	95	---	---	---	---	---	---	---
	2.0	2.00	---	---	---	---	1.86	2.00	3.09	0.44	0.56	0.99	2.00	2.57	4.53	95	---	---	---	---	---	---	---
	2.5	2.50	---	---	---	---	1.98	2.50	3.61	0.48	0.71	1.14	2.18	3.25	5.24	95	---	---	---	---	---	---	---
	3.5	3.50	---	---	---	---	2.03	3.50	4.92	0.50	1.14	1.43	2.31	5.22	6.53	95	---	---	---	---	---	---	---
	4.2	---	---	4.20	---	---	2.06	4.20	5.06	0.51	1.46	1.54	2.35	6.69	7.06	95	---	---	---	---	---	---	---
	5.0	---	---	5.00	---	---	2.20	5.00	5.94	0.48	1.52	1.74	2.18	6.96	7.95	95	---	---	---	---	---	---	---
	6.0	---	---	6.00	---	---	2.31	6.00	6.73	0.49	1.89	2.17	2.22	8.65	9.94	95	---	---	---	---	---	---	---
	7.1	---	---	7.10	---	---	2.43	7.10	7.53	0.51	2.57	2.66	2.35	11.77	12.16	95	---	---	---	---	---	---	---
	1.5+1.5	1.50	1.50	---	---	---	2.01	3.00	4.11	0.42	0.51	1.01	1.94	2.34	4.64	95	5.92	A	255	A++	7.08	3.0	149
	1.5+2.0	1.50	2.00	---	---	---	2.03	3.50	4.59	0.46	0.63	1.19	2.11	2.89	5.46	95	5.62	A	315	A++	7.22	3.5	170
	1.5+2.5	1.50	2.50	---	---	---	2.09	4.00	5.06	0.42	0.76	1.23	1.94	3.48	5.62	95	5.32	A	380	A++	7.31	4.0	192
	1.5+3.5	1.50	3.50	---	---	---	2.20	5.00	5.94	0.42	1.03	1.59	1.94	4.72	7.29	95	4.87	A	515	A++	7.45	5.0	235
	1.5+4.2	1.50	---	4.20	---	---	2.27	5.70	6.50	0.42	1.28	1.86	1.94	5.86	8.51	95	4.47	A	640	A++	7.45	5.7	268
	1.5+5.0	1.50	---	5.00	---	---	2.36	6.50	7.11	0.46	1.53	2.15	2.11	7.01	9.86	95	4.27	A	765	A++	7.51	6.5	303
	1.5+6.0	1.50	---	6.00	---	---	2.48	7.50	7.79	0.50	1.89	2.29	2.27	8.65	10.47	95	3.97	A	945	A++	7.45	7.5	352
	1.5+7.1	1.50	---	7.10	---	---	2.64	8.60	8.46	0.52	2.28	2.67	2.40	10.44	12.22	95	3.77	A	1140	A++	7.43	8.6	406
	2.0+2.0	2.00	2.00	---	---	---	2.09	4.00	5.41	0.46	0.75	1.59	2.11	3.44	7.29	95	5.34	A	375	A++	7.30	4.0	192
	2.0+2.5	2.00	2.50	---	---	---	2.14	4.50	5.84	0.46	0.91	1.59	2.11	4.17	7.29	95	4.99	A	455	A++	7.35	4.5	215
	2.0+3.5	2.00	3.50	---	---	---	2.25	5.50	6.49	0.46	1.18	1.86	2.11	5.41	8.51	95	4.67	A	590	A++	7.49	5.5	257
	2.0+4.2	2.00	---	4.20	---	---	2.33	6.20	6.89	0.46	1.43	2.09	2.11	6.55	9.57	95	4.35	A	715	A++	7.50	6.2	290
	2.0+5.0	2.00	---	5.00	---	---	2.42	7.00	7.46	0.46	1.66	2.31	2.11	7.60	10.55	95	4.22	A	830	A++	7.52	7.0	326
	2.0+6.0	1.88	---	5.63	---	---	2.55	7.50	8.12	0.50	1.85	2.50	2.27	8.47	11.45	95	4.05	A	925	A++	7.48	7.5	351
	2.0+7.1	1.76	---	6.24	---	---	2.71	8.00	8.64	0.52	2.00	2.79	2.40	9.16	12.75	95	4.01	A	1000	A++	7.49	8.0	374
	2.5+2.5	2.50	2.50	---	---	---	2.20	5.00	6.32	0.42	1.02	1.77	1.94	4.67	8.11	95	4.92	A	510	A++	7.46	5.0	235
	2.5+3.5	2.50	3.50	---	---	---	2.31	6.00	6.73	0.46	1.40	2.00	2.11	6.41	9.16	95	4.31	A	700	A++	7.48	6.0	281
	2.5+4.2	2.50	---	4.20	---	---	2.39	6.70	7.25	0.46	1.58	2.29	2.11	7.24	10.47	95	4.26	A	790	A++	7.55	6.7	311
	2.5+5.0	2.50	---	5.00	---	---	2.48	7.50	7.79	0.49	1.85	2.51	2.23	8.47	11.49	95	4.05	A	925	A++	7.46	7.5	352
	2.5+6.0	2.35	---	5.65	---	---	2.63	8.00	8.42	0.52	2.00	2.67	2.40	9.16	12.22	95	4.01	A	1000	A++	7.49	8.0	374
	2.5+7.1	2.21	---	6.29	---	---	2.79	8.50	8.64	0.55	2.17	2.79	2.53	9.94	12.75	95	3.93	A	1085	A++	7.47	8.5	398
	3.5+3.5	3.50	3.50	---	---	---	2.42	7.00	7.46	0.49	1.66	2.39	2.23	7.60	10.96	95	4.22	A	830	A++	7.53	7.0	326
	3.5+4.2	3.50	---	4.20	---	---	2.51	7.70	7.81	0.49	1.92	2.60	2.23	8.79	11.89	95	4.02	A	960	A++	7.48	7.7	360
	3.5+5.0	3.29	---	4.71	---	---	2.63	8.00	7.99	0.52	1.99	2.62	2.40	9.11	11.98	95	4.03	A	995	A++	7.46	8.0	375
	3.5+6.0	2.95	---	5.05	---	---	2.77	8.00	8.62	0.55	1.96	2.79	2.53	8.98	12.75	95	4.08	A	980	A++	7.47	8.0	375
	3.5+7.1	2.97	---	6.03	---	---	2.93	9.00	8.64	0.59	2.41	2.79	2.69	11.03	12.75	95	3.73	A	1205	A++	7.35	9.0	429
	4.2+4.2	4.00	---	4.00	---	---	2.61	8.00	7.82	0.52	2.07	2.60	2.36	9.48	11.89	95	3.87	A	1035	A++	7.42	8.0	377
	4.2+5.0	3.65	---	4.35	---	---	2.73	8.00	8.17	0.55	2.02	2.73	2.53	9.25	12.50	95	3.97	A	1010	A++	7.41	8.0	378
	4.2+6.0	3.50	---	5.00	---	---	2.88	8.50	8.63	0.55	2.21	2.79	2.53	10.12	12.75	95	3.85	A	1105	A++	7.38	8.5	404
	4.2+7.1	3.35	---	5.65	---	---	3.04	9.00	8.83	0.59	2.41	2.90	2.69	11.03	13.28	95	3.74	A	1205	A++	7.35	9.0	429
	5.0+5.0	4.25	---	4.25	---	---	2.85	8.50	8.34	0.55	2.10	2.84	2.53	9.62	12.99	95	4.05	A	1050	A++	7.49	8.5	397
	5.0+6.0	4.09	---	4.91	---	---	2.99	9.00	8.81	0.59	2.20	2.89	2.69	10.07	13.24	95	4.10	A	1100	A++	7.54	9.0	418
	5.0+7.1	3.72	---	5.28	---	---	3.16	9.00	9.06	0.62	2.17	3.02	2.82	9.94	13.81	95	4.15	A	1085	A++	7.55	9.0	417
	6.0+6.0	4.50	---	4.50	---	---	3.14	9.00	9.46	0.59	2.19	2.99	2.69	10.03	13.69	95	4.12	A	1095	A++	7.55	9.0	418
	6.0+7.1	4.12	---	4.88	---	---	3.30	9.00	9.48	0.63	2.16	2.99	2.86	9.89	13.69	95	4.17	A	1080	A++	7.56	9.0	417
	7.1+7.1	4.50	---	4.50	---	---	3.46	9.00	9.50	0.65	2.16	2.99	2.99	9.89	13.69	95	4.17	A	1080	A++	7.56	9.0	417
	1.5+1.5+1.5	1.50	1.50	1.50	---	---	2.14	4.50	5.51	0.43	0.83	1.24	1.98	3.80	5.66	95	5.42	A	415	A++	8.03	4.5	197
	1.5+1.5+2.0	1.50	1.50	2.00	---	---	2.20	5.00	5.94	0.43	0.96	1.40	1.98	4.40	6.39	95	5.24	A	480	A++	8.10	5.0	217
	1.5+1.5+2.5	1.50	1.50	2.50	---	---	2.25	5.50	6.34	0.43	1.09	1.57	1.98	4.99	7.17	95	5.06	A	545	A++	8.32	5.5	232
	1.5+1.5+3.5	1.50	1.50	3.50	---	---	2.36	6.50	7.11	0.46	1.38	1.93	2.11	6.32	8.84	95	4.71	A	690	A++	8.33	6.5	273
	1.5+1.5+4.2	1.50	1.50	4.20	---	---	2.44	7.20	7.60	0.46	1.61	2.18	2.11	7.37	9.98	95	4.49	A	805	A++	8.29	7.2	304
	1.5+1.5+5.0	1.41	1.41	4.69	---	---	2.55	7.50	8.12	0.50	1.75	2.41	2.27	8.01	11.04	95	4.30	A	875	A++	8.22	7.5	320
	1.5+1.5+6.0	1.33	1.33	5.33	---	---	2.70	8.00	8.70	0.53	1.96	2.51	2.44	8.98	11.49	95	4.08	A	980	A++	8.16	8.0	344
	1.5+1.5+7.1	1.26	1.26	5.98	---	---	2.86	8.50	9.25	0.56	2.20	2.87	2.57	10.07	13.12	95	3.86	A	1100	A++	8.09	8.5	368
	1.5+2.0+2.0	1.50	2.00	2.00	---	---	2.25	5.50	6.34	0.46	1.09	1.57	2.11	4.99	7.17	95	5.08	A	545	A++	8.30	5.5	232
	1.5+2.0+2.5	1.50	2.00	2.50	---	---	2.31	6.00	6.73	0.43	1.23	1.74	1.98	5.63	7.98	95	4.90	A	615	A++	8.30	6.0	253
	1.5+2.0+3.5	1.50	2.00	3.50	---	---	2.42	7.00	7.46	0.46	1.52	2.14	2.11	6.96	9.78	95	4.62	A	760	A++	8.32	7.0	295
	1.5+2.0+4.2	1.50	2.00	4.20	---	---	2.51	7.70	7.93	0.50	1.83	2.39	2.27	8.38	10.96	95	4.22	A	915	A++	8.23	7.7	328
	1.5+2.0+5.0	1.41	1.88	4.71	---	---	2.63	8.00	8.42	0.50	1.95	2.57	2.27	8.93	11.77	95	4.10	A	975	A++	8.14	8.0	344
	1.5+2.0+6.0	1.26	1.68	5.05	---	---	2.77	8.00	8.96	0.53	1.94	2.68	2.44	8.88	12.26	95	4.12	A	970	A++	8.14	8.0	344
	1.5+2.0+7.1	1.27	1.70	6.03	---	---	2.93	9.00	9.30	0.56	2.39	2.87	2.57	10.94	13.12	95	3.77	A	1195	A++	8.03	9.0	392
	1.5+2.5+2.5	1.50	2.50	2.50	---	---	2.36	6.50	7.11	0.46	1.39	1.93	2.11	6.37	8.84	95	4.70	A	695	A++	8.30	6.5	275
	1.5+2.5+3.5	1.50	2.50	3.50	---	---	2.48	7.50	7.79	0.50	1.72	2.29	2.27	7.88	10.47	95	4.37	A	860	A++	8.28	7.5	317
	1.5+2.5+4.2	1.46	2.44	4.10	---	---	2.58	8.00	8.24	0.50	1.99	2.56	2.27	9.11	11.73	95	4.02	A	995	A++	8.11	8.0	345
	1.5+2.5+5.0	1.33	2.22	4.44	---	---	2.70	8.00	8.70	0.52	1.95	2.75	2.40	8.93	12.59	95	4.10	A	975	A++	8.14	8.0	344
	1.5+2.5+6.0	1.28	2.13	5.10	---	---	2.85	8.50	9.21	0.53	2.20	2.87	2.44	10.07	13.12	95	3.86	A	1100	A++	8.09	8.5	368
	1.5+2.5+7.1	1.22	2.03	5.76	---	---	3.01	9.00	9.49	0.56	2.39	2.99	2.57	10.94	13.69	95	3.77	A	1195	A++	8.03	9.0	392
	1.5+3.5+3.5	1.41	3.29	3.29	---	---	2.63	8.00	8.42	0.52	2.00	2.67	2.40	9.16	12.22	95	4.00	A	1000	A++	8.11	8.0	346
	1.5+3.5+4.2	1.30	3.04	3.65	---	---	2.73	8.00	8.65	0.52	1.99	2.79	2.40	9.11	12.75	95	4.02	A	995	A++	8.10	8.0	346
	1.5+3.5+5.0	1.28	2.98	4.25	---	---	2.85	8.50	8.83	0.56	2.20	2.81	2.57	10.07	12.87	95	3.86	A	1100	A++	8.09	8.5	368
	1.5+3.5+6.0	1.23	2.86	4.91	---	---	2.99	9.00	9.29	0.56	2.39	2.87	2.57	10.94	13.12	95	3.77	A	1195	A++	8.03	9.0	392
	1.5+3.5+7.1	1.12	2.60	5.28	---	---	3.16	9.00	9.50	0.59	2.36	2.99	2.69	10.81	13.69	95	3.82	A	1180	A++	8.05	9.0	392
	1.5+4.2+4.2	1.50	---	4.20	4.20	---	2.83	9.90	8.66	0.55	2.45	2.79	2.53	11.22	12.75	95	4.04	A	1225	A++	8.26	9.9	419
	1.5+4.2+5.0	1.26	---	3.53	4.21	---	2.95	9.00	8.84	0.56	2.18	2.81	2.57	9.98	12.87	95	4.14	A	1090	A++	8.18	9.0	385
	1.5+4.2+6.0	1.15	---	3.23	4.62	---	3.10	9.00	9.49	0.59	2.15	2.99	2.69	9.84	13.69	95	4.19	A	1075	A++	8.19	9.0	385
	1.5+4.2+7.1	1.05	---	2.95	4.99	---	3.26	9.00	9.51	0.63	2.13	2.99	2.86	9.75	13.69	95	4.24	A	1065	A++	8.20	9.0	384
	1.5+5.0+5.0	1.17	---	3.91	3.91	---	3.07	9.00	9.20	0.59	2.04	2.95	2.69	9.34	13.52	95	4.42	A	1020	A++	8.21	9.0	384
	1.5+5.0+6.0	1.08	---	3.60	4.32	---	3.21	9.00	9.66	0.59	2.03	3.02	2.69	9.30	13.81	95	4.44	A	1015	A++	8.22	9.0	384
	1.5+5.0+7.1	0.99	---	3.31	4.70	---	3.38	9.00	9.68	0.63	2.01	3.02	2.86	9.20	13.81	95	4.49	A	1005	A++	8.22	9.0	383
	1.5+6.0+6.0	1.00	---	4.00	4.00	---	3.36	9.00	10.13	0.63	2.02	3.08	2.86	9.25	14.09	95	4.46	A	1010	A++	8.22	9.0	383
	1.5+6.0+7.1	1.19	---	3.58	4.23	---	3.51	9.00	10.15	0.65	2.00	3.08	2.99	9.16	14.09	95	4.51	A	1000	A++	8.23	9.0	383
	2.0+2.0+2.0	2.00	2.00	2.00	---	---	2.31	6.00	6.76	0.46	1.23	1.74	2.11	5.63	7.98	95	4.90	A	615	A++	8.30	6.0	253

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	E room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
	2.0+2.0+2.5	2.00	2.00	2.50	---	---	2.36	6.50	7.11	0.46	1.39	1.93	2.11	6.37	8.84	95	4.70	A	695	A++	8.30	6.5	275
	2.0+2.0+3.5	2.00	2.00	3.50	---	---	2.48	7.50	7.79	0.50	1.72	2.29	2.27	7.88	10.47	95	4.37	A	860	A++	8.28	7.5	317
	2.0+2.0+4.2	2.00	2.00	4.20	---	---	2.58	8.20	8.24	0.50	2.04	2.56	2.27	9.34	11.73	95	4.02	A	1020	A++	8.13	8.2	353
	2.0+2.0+5.0	1.78	1.78	4.44	---	---	2.70	8.00	8.70	0.52	1.95	2.75	2.40	8.93	12.59	95	4.10	A	975	A++	8.14	8.0	344
	2.0+2.0+6.0	1.70	1.70	5.10	---	---	2.85	8.50	9.21	0.53	2.20	2.87	2.44	10.07	13.12	95	3.86	A	1100	A++	8.08	8.5	368
	2.0+2.0+7.1	1.62	1.62	5.76	---	---	3.01	9.00	9.49	0.56	2.36	2.99	2.57	10.81	13.69	95	3.82	A	1180	A++	8.04	9.0	392
	2.0+2.5+2.5	2.00	2.50	2.50	---	---	2.42	7.00	7.46	0.46	1.52	2.14	2.11	6.96	9.78	95	4.62	A	760	A++	8.32	7.0	295
	2.0+2.5+3.5	1.88	2.34	3.28	---	---	2.55	7.50	8.12	0.50	1.72	2.50	2.27	7.88	11.45	95	4.38	A	860	A++	8.28	7.5	317
	2.0+2.5+4.2	1.84	2.30	3.86	---	---	2.66	8.00	8.53	0.52	1.99	2.73	2.40	9.11	12.50	95	4.03	A	995	A++	8.11	8.0	345
	2.0+2.5+5.0	1.68	2.11	4.21	---	---	2.77	8.00	8.82	0.52	1.95	2.80	2.40	8.93	12.83	95	4.11	A	975	A++	8.14	8.0	344
	2.0+2.5+6.0	1.66	2.07	4.97	---	---	2.92	8.70	9.28	0.56	2.29	2.87	2.57	10.49	13.12	95	3.80	A	1145	A++	8.05	8.7	378
	2.0+2.5+7.1	1.55	1.94	5.51	---	---	3.08	9.00	9.49	0.59	2.35	2.99	2.69	10.76	13.69	95	3.83	A	1175	A++	8.05	9.0	392
	2.0+3.5+3.5	1.78	3.11	3.11	---	---	2.70	8.00	8.64	0.52	1.98	2.79	2.40	9.07	12.75	95	4.04	A	990	A++	8.12	8.0	345
	2.0+3.5+4.2	1.75	3.07	3.68	---	---	2.80	8.50	8.65	0.55	2.17	2.79	2.53	9.94	12.75	95	3.93	A	1085	A++	8.07	8.5	369
	2.0+3.5+5.0	1.66	2.90	4.14	---	---	2.92	8.70	8.83	0.56	2.28	2.81	2.57	10.44	12.87	95	3.82	A	1140	A++	8.04	8.7	379
	2.0+3.5+6.0	1.57	2.74	4.70	---	---	3.07	9.00	9.48	0.59	2.35	2.99	2.69	10.76	13.69	95	3.83	A	1175	A++	8.05	9.0	392
	2.0+3.5+7.1	1.43	2.50	5.07	---	---	3.23	9.00	9.50	0.63	2.32	2.99	2.86	10.62	13.69	95	3.88	A	1160	A++	8.06	9.0	391
	2.0+4.2+4.2	1.67	---	3.51	3.51	---	2.91	8.70	8.66	0.55	2.24	2.79	2.53	10.26	12.75	95	3.89	A	1120	A++	8.06	8.7	378
	2.0+4.2+5.0	1.61	---	3.38	4.02	---	3.02	9.00	9.02	0.59	2.36	2.93	2.69	10.81	13.40	95	3.81	A	1180	A++	8.03	9.0	392
	2.0+4.2+6.0	1.48	---	3.10	4.43	---	3.17	9.00	9.49	0.59	2.33	2.99	2.69	10.67	13.69	95	3.86	A	1165	A++	8.05	9.0	392
	2.0+4.2+7.1	1.35	---	2.84	4.80	---	3.33	9.00	9.51	0.63	2.30	2.99	2.86	10.53	13.69	95	3.91	A	1150	A++	8.06	9.0	391
	2.0+5.0+5.0	1.50	---	3.75	3.75	---	3.14	9.00	9.20	0.59	2.22	2.95	2.69	10.17	13.52	95	4.06	A	1110	A++	8.09	9.0	390
	2.0+5.0+6.0	1.38	---	3.46	4.15	---	3.29	9.00	9.66	0.63	2.19	3.02	2.86	10.03	13.81	95	4.11	A	1095	A++	8.10	9.0	389
	2.0+5.0+7.1	1.28	---	3.19	4.53	---	3.45	9.00	9.68	0.65	2.17	3.02	2.99	9.94	13.81	95	4.16	A	1085	A++	8.11	9.0	388
	2.0+6.0+6.0	1.29	---	3.86	3.86	---	3.43	9.00	10.13	0.63	2.18	3.08	2.86	9.98	14.09	95	4.13	A	1090	A++	8.11	9.0	389
	2.0+6.0+7.1	1.19	---	3.58	4.23	---	3.59	9.00	10.61	0.65	2.16	3.56	2.99	9.89	16.29	95	4.18	A	1080	A++	8.12	9.0	388
	2.5+2.5+2.5	2.50	2.50	2.50	---	---	2.48	7.50	7.79	0.50	1.71	2.29	2.27	7.83	10.47	95	4.39	A	855	A++	8.28	7.5	317
	2.5+2.5+3.5	2.35	2.35	3.29	---	---	2.63	8.00	8.42	0.52	1.98	2.67	2.40	9.07	12.22	95	4.05	A	990	A++	8.13	8.0	345
	2.5+2.5+4.2	2.17	2.17	3.65	---	---	2.73	8.00	8.64	0.52	1.97	2.79	2.40	9.02	12.75	95	4.07	A	985	A++	8.14	8.0	344
	2.5+2.5+5.0	2.13	2.13	4.25	---	---	2.85	8.50	8.82	0.56	2.20	2.80	2.57	10.07	12.83	95	3.87	A	1100	A++	8.07	8.5	369
	2.5+2.5+6.0	2.05	2.05	4.91	---	---	2.99	9.00	9.28	0.56	2.35	2.87	2.57	10.76	13.12	95	3.83	A	1175	A++	8.05	9.0	391
	2.5+2.5+7.1	1.86	1.86	5.28	---	---	3.16	9.00	9.49	0.59	2.32	2.99	2.69	10.62	13.69	95	3.88	A	1160	A++	8.07	9.0	391
	2.5+3.5+3.5	2.11	2.95	2.95	---	---	2.77	8.00	8.64	0.55	1.96	2.79	2.53	8.98	12.75	95	4.08	A	980	A++	8.14	8.0	344
	2.5+3.5+4.2	2.08	2.92	3.50	---	---	2.88	8.50	8.65	0.55	2.19	2.79	2.53	10.03	12.75	95	3.88	A	1095	A++	8.09	8.5	368
	2.5+3.5+5.0	2.05	2.86	4.09	---	---	2.99	9.00	8.83	0.59	2.33	2.81	2.69	10.67	12.87	95	3.87	A	1165	A++	8.05	9.0	392
	2.5+3.5+6.0	1.88	2.63	4.50	---	---	3.14	9.00	9.48	0.59	2.30	2.99	2.69	10.53	13.69	95	3.92	A	1150	A++	8.06	9.0	391
	2.5+3.5+7.1	1.72	2.40	4.88	---	---	3.30	9.00	9.50	0.63	2.27	2.99	2.86	10.39	13.69	95	3.97	A	1135	A++	8.07	9.0	390
	2.5+4.2+4.2	2.06	---	3.47	3.47	---	2.98	9.00	8.61	0.59	2.41	2.79	2.69	11.03	12.75	95	3.74	A	1205	A++	8.01	9.0	394
	2.5+4.2+5.0	1.92	---	3.23	3.85	---	3.10	9.00	9.02	0.59	2.35	2.93	2.69	10.76	13.40	95	3.84	A	1175	A++	7.99	9.0	394
5MXM90N2V1B	2.5+4.2+6.0	1.77	---	2.98	4.25	---	3.24	9.00	9.49	0.63	2.32	2.99	2.86	10.62	13.69	95	3.89	A	1160	A++	8.01	9.0	394
	2.5+4.2+7.1	1.63	---	2.74	4.63	---	3.41	9.00	9.51	0.65	2.29	2.99	2.99	10.49	13.69	95	3.94	A	1145	A++	8.02	9.0	393
	2.5+5.0+5.0	1.80	---	3.60	3.60	---	3.21	9.00	9.20	0.62	2.21	3.00	2.82	10.12	13.73	95	4.08	A	1105	A++	8.10	9.0	389
	2.5+5.0+6.0	1.67	---	3.33	4.00	---	3.36	9.00	9.66	0.63	2.18	3.02	2.86	9.98	13.81	95	4.13	A	1090	A++	8.11	9.0	388
	2.5+5.0+7.1	1.54	---	3.08	4.38	---	3.51	9.00	9.68	0.65	2.16	3.02	2.99	9.89	13.81	95	4.18	A	1080	A++	8.12	9.0	388
	2.5+6.0+6.0	1.55	---	3.72	3.72	---	3.50	9.00	10.13	0.65	2.17	3.08	2.99	9.94	14.09	95	4.15	A	1085	A++	8.12	9.0	388
	2.5+6.0+7.1	1.44	---	3.46	4.10	---	3.66	9.00	10.61	0.65	2.15	3.56	2.99	9.84	16.29	95	4.20	A	1075	A++	8.13	9.0	388
	3.5+3.5+3.5	2.90	2.90	2.90	---	---	2.92	8.70	8.77	0.59	2.23	2.90	2.69	10.21	13.28	95	3.91	A	1115	A++	8.05	8.7	378
	3.5+3.5+4.2	2.81	2.81	3.38	---	---	3.02	9.00	8.83	0.59	2.40	2.90	2.69	10.99	13.28	95	3.76	A	1200	A++	7.98	9.0	395
	3.5+3.5+5.0	2.63	2.63	3.75	---	---	3.14	9.00	9.02	0.62	2.33	2.95	2.82	10.67	13.52	95	3.86	A	1165	A++	7.97	9.0	395
	3.5+3.5+6.0	2.42	2.42	4.15	---	---	3.29	9.00	9.49	0.63	2.30	2.99	2.86	10.53	13.69	95	3.91	A	1150	A++	7.99	9.0	395
	3.5+3.5+7.1	2.23	2.23	4.53	---	---	3.45	9.00	9.51	0.65	2.28	2.99	2.99	10.44	13.69	95	3.96	A	1140	A++	8.00	9.0	394
	3.5+4.2+4.2	2.65	---	3.18	3.18	---	3.13	9.00	8.97	0.62	2.38	2.90	2.82	10.90	13.28	95	3.78	A	1190	A++	7.99	9.0	394
	3.5+4.2+5.0	2.48	---	2.98	3.54	---	3.24	9.00	9.18	0.62	2.32	2.93	2.82	10.62	13.40	95	3.88	A	1160	A++	7.98	9.0	395
	3.5+4.2+6.0	2.30	---	2.76	3.94	---	3.39	9.00	9.50	0.65	2.29	2.99	2.99	10.49	13.69	95	3.93	A	1145	A++	7.99	9.0	394
	3.5+4.2+7.1	2.13	---	2.55	4.32	---	3.54	9.00	10.01	0.69	2.26	3.52	3.16	10.35	16.09	95	3.98	A	1130	A++	8.00	9.0	394
	3.5+5.0+5.0	2.33	---	3.33	3.33	---	3.36	9.00	9.20	0.65	2.19	2.98	2.99	10.03	13.65	95	4.12	A	1095	A++	8.11	9.0	388
	3.5+5.0+6.0	2.17	---	3.10	3.72	---	3.50	9.00	9.67	0.65	2.16	3.02	2.99	9.89	13.81	95	4.17	A	1080	A++	8.13	9.0	388
	3.5+5.0+7.1	2.02	---	2.88	4.10	---	3.66	9.00	10.14	0.69	2.14	3.48	3.16	9.80	15.93	95	4.22	A	1070	A++	8.14	9.0	387
	3.5+6.0+6.0	2.03	---	3.48	3.48	---	3.65	9.00	10.59	0.65	2.15	3.56	2.99	9.84	16.29	95	4.19	A	1075	A++	8.13	9.0	388
	4.2+4.2+4.2	3.00	---	3.00	3.00	---	3.23	9.00	9.18	0.65	2.37	2.91	2.99	10.85	13.32	95	3.80	A	1185	A++	8.00	9.0	394
	4.2+4.2+5.0	2.82	---	2.82	3.36	---	3.35	9.00	9.26	0.65	2.31	2.93	2.99	10.58	13.40	95	3.90	A	1155	A++	7.99	9.0	395
	4.2+4.2+6.0	2.63	---	2.63	3.75	---	3.48	9.00	9.51	0.65	2.28	2.99	2.99	10.44	13.69	95	3.95	A	1140	A++	8.00	9.0	394
	4.2+4.2+7.1	2.44	---	2.44	4.12	---	3.65	9.00	10.02	0.69	2.25	3.52	3.16	10.30	16.09	95	4.00	A	1125	A++	8.01	9.0	394
	4.2+5.0+5.0	2.66	---	3.17	3.17	---	3.46	9.00	9.21	0.68	2.30	2.95	3.12	10.53	13.52	95	3.92	A	1150	A++	7.99	9.0	394
	4.2+5.0+6.0	2.49	---	2.96	3.55	---	3.60	9.00	10.18	0.69	2.27	3.54	3.16	10.39	16.21	95	3.97	A	1135	A++	8.00	9.0	394
	5.0+5.0+5.0	3.00	---	3.00	3.00	---	3.57	9.00	9.98	0.69	2.29	3.62	3.16	10.49	16.58	95	3.94	A	1145	A++	8.00	9.0	394
	1.5+1.5+1.5+1.5	1.50	1.50	1.50	1.50	---	2.31	6.00	6.73	0.44	1.25	1.44	2.02	5.73	6.60	95	4.82	A	625	A++	8.33	6.0	252
	1.5+1.5+1.5+2.0	1.50	1.50	1.50	2.00	---	2.36	6.50	7.11	0.47	1.38	1.62	2.15	6.32	7.41	95	4.72	A	690	A++	8.44	6.5	270
	1.5+1.5+1.5+2.5	1.50	1.50	1.50	2.50	---	2.42	7.00	7.46	0.47	1.50	1.76	2.15	6.87	8.06	95	4.68	A	750	A+++	8.57	7.0	286
	1.5+1.5+1.5+3.5	1.41	1.41	1.41	3.28	---	2.55	7.50	8.12	0.50	1.63	2.06	2.27	7.46	9.45	95	4.62	A	815	A+++	8.58	7.5	306
	1.5+1.5+1.5+4.2	1.38	1.38	1.38	3.86	---	2.66	8.00	8.53	0.50	1.94	2.39	2.27	8.88	10.96	95	4.12	A	970	A++	8.38	8.0	335
	1.5+1.5+1.5+5.0	1.26	1.26	1.26	4.21	---	2.77	8.00	8.96	0.53	1.90	2.58	2.44	8.70	11.81	95	4.22	A	950	A++	8.37	8.0	335
	1.5+1.5+1.5+6.0	1.24	1.24	1.24	4.97	---	2.92	8.70	9.44	0.53	2.34	2.63	2.44	10.71	12.02	95	3.72	A	1170	A++	8.15	8.7	374
	1.5+1.5+1.5+7.1	1.16	1.16	1.16	5.51	---	3.08	9.00	9.86	0.56	2.39	2.88	2.57	10.94	13.20	95	3.77	A	1195	A++	8.20	9.0	385
	1.5+1.5+2.0+2.0	1.50	1.50	2.00	2.00	---	2.42	7.00	7.46	0.47	1.50	1.76	2.15	6.87	8.06	95	4.68	A	750	A+++	8.57	7.0	286
	1.5+1.5+2.0+2.5	1.50	1.50	2.00	2.50	---	2.48	7.50	7.79	0.47	1.63	1.91	2.15	7.46	8.76	95	4.61	A	815	A+++	8.57	7.5	307
	1.5+1.5+2.0+3.5	1.41	1.41	1.88	3.29	---	2.63	8.00	8.42	0.50	1.94	2.23	2.27	8.88	10.18	95	4.12	A	970	A++	8.38	8.0	335
	1.5+1.5+2.0+4.2	1.30	1.30	1.74	3.65	---	2.73	8.00	8.80	0.53	1.94	2.56	2.44	8.88	11.73	95	4.14	A	970	A++	8.38	8.0	334
	1.5+1.5+2.0+5.0	1.28	1.28	1.70	4.25	---	2.85	8.50	9.21	0.53	2.23	2.77	2.44	10.21	12.67	95	3.82	A	1115	A++	8.20	8.5	363

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	E room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
	1.5+1.5+2.0+6.0	1.23	1.23	1.64	4.91	---	2.99	9.00	9.64	0.56	2.39	2.75	2.57	10.94	12.59	95	3.77	A	1195	A++	8.20	9.0	385
	1.5+1.5+2.0+7.1	1.12	1.12	1.49	5.28	---	3.16	9.00	10.04	0.60	2.36	3.02	2.74	10.81	13.81	95	3.82	A	1180	A++	8.21	9.0	384
	1.5+1.5+2.5+2.5	1.41	1.41	2.34	2.34	---	2.55	7.50	8.12	0.50	1.63	2.06	2.27	7.46	9.45	95	4.61	A	815	A+++	8.57	7.5	307
	1.5+1.5+2.5+3.5	1.33	1.33	2.22	3.11	---	2.70	8.00	8.70	0.53	1.94	2.51	2.44	8.88	11.49	95	4.14	A	970	A++	8.39	8.0	334
	1.5+1.5+2.5+4.2	1.31	1.31	2.19	3.68	---	2.80	8.50	9.06	0.53	2.25	2.74	2.44	10.30	12.55	95	3.78	A	1125	A++	8.18	8.5	364
	1.5+1.5+2.5+5.0	1.24	1.24	2.07	4.14	---	2.92	8.70	9.44	0.56	2.33	2.89	2.57	10.67	13.24	95	3.74	A	1165	A++	8.16	8.7	373
	1.5+1.5+2.5+6.0	1.17	1.17	1.96	4.70	---	3.07	9.00	9.83	0.56	2.43	2.88	2.57	11.13	13.20	95	3.71	A	1215	A++	8.15	9.0	387
	1.5+1.5+2.5+7.1	1.07	1.07	1.79	5.07	---	3.23	9.00	10.16	0.60	2.40	3.08	2.74	10.99	14.09	95	3.76	A	1200	A++	8.17	9.0	386
	1.5+1.5+3.5+3.5	1.28	1.28	2.98	2.98	---	2.85	8.50	9.21	0.53	2.25	2.80	2.44	10.30	12.83	95	3.78	A	1125	A++	8.18	8.5	364
	1.5+1.5+3.5+4.2	1.26	1.26	2.94	3.53	---	2.95	9.00	9.32	0.56	2.47	2.87	2.57	11.31	13.12	95	3.65	A	1235	A++	8.13	9.0	388
	1.5+1.5+3.5+5.0	1.17	1.17	2.74	3.91	---	3.07	9.00	9.68	0.59	2.40	3.02	2.69	10.99	13.81	95	3.75	A	1200	A++	8.13	9.0	388
	1.5+1.5+3.5+6.0	1.08	1.08	2.52	4.32	---	3.21	9.00	10.15	0.59	2.37	3.08	2.69	10.85	14.09	95	3.80	A	1185	A++	8.15	9.0	387
	1.5+1.5+3.5+7.1	0.99	0.99	2.32	4.70	---	3.38	9.00	10.17	0.63	2.34	3.08	2.86	10.71	14.09	95	3.85	A	1170	A++	8.16	9.0	386
	1.5+1.5+4.2+4.2	1.18	1.18	3.32	3.32	---	3.05	9.00	9.52	0.59	2.45	2.99	2.69	11.22	13.69	95	3.67	A	1225	A++	8.14	9.0	387
	1.5+1.5+4.2+5.0	1.11	1.11	3.10	3.69	---	3.17	9.00	9.69	0.59	2.39	3.02	2.69	10.94	13.81	95	3.77	A	1195	A++	8.14	9.0	387
	1.5+1.5+4.2+6.0	1.02	1.02	2.86	4.09	---	3.32	9.00	10.16	0.60	2.36	3.08	2.74	10.81	14.09	95	3.82	A	1180	A++	8.15	9.0	387
	1.5+1.5+4.2+7.1	0.94	0.94	2.64	4.47	---	3.47	9.00	10.18	0.63	2.33	3.08	2.86	10.67	14.09	95	3.87	A	1165	A++	8.17	9.0	386
	1.5+1.5+5.0+5.0	1.04	1.04	3.46	3.46	---	3.29	9.00	9.87	0.63	2.24	3.04	2.86	10.26	13.93	95	4.02	A	1120	A++	8.19	9.0	385
	1.5+1.5+5.0+6.0	0.96	0.96	3.21	3.86	---	3.43	9.00	10.34	0.63	2.21	3.11	2.86	10.12	14.22	95	4.07	A	1105	A++	8.20	9.0	384
	1.5+1.5+5.0+7.1	0.89	0.89	2.98	4.23	---	3.59	9.00	10.67	0.65	2.19	3.45	2.99	10.03	15.80	95	4.12	A	1095	A++	8.21	9.0	384
	1.5+1.5+6.0+6.0	0.90	0.90	3.60	3.60	---	3.57	9.00	10.66	0.63	2.20	3.10	2.86	10.07	14.17	95	4.09	A	1100	A++	8.21	9.0	384
	1.5+2.0+2.0+2.0	1.50	2.00	2.00	2.00	---	2.48	7.50	7.79	0.47	1.63	1.91	2.15	7.46	8.76	95	4.61	A	815	A+++	8.57	7.5	307
	1.5+2.0+2.0+2.5	1.41	1.88	1.88	2.34	---	2.55	7.50	8.12	0.50	1.62	2.06	2.27	7.42	9.45	95	4.63	A	810	A++	8.44	7.5	311
	1.5+2.0+2.0+3.5	1.33	1.78	1.78	3.11	---	2.70	8.00	8.70	0.53	1.94	2.34	2.44	8.88	10.71	95	4.14	A	970	A++	8.39	8.0	334
	1.5+2.0+2.0+4.2	1.31	1.75	1.75	3.68	---	2.80	8.50	9.06	0.53	2.25	2.74	2.44	10.30	12.55	95	3.78	A	1125	A++	8.18	8.5	364
	1.5+2.0+2.0+5.0	1.24	1.66	1.66	4.14	---	2.92	8.70	9.44	0.56	2.34	2.89	2.57	10.71	13.24	95	3.72	A	1170	A++	8.15	8.7	374
	1.5+2.0+2.0+6.0	1.17	1.57	1.57	4.70	---	3.07	9.00	9.83	0.56	2.43	2.88	2.57	11.13	13.20	95	3.71	A	1215	A++	8.15	9.0	387
	1.5+2.0+2.0+7.1	1.07	1.43	1.43	5.07	---	3.23	9.00	10.16	0.60	2.40	3.08	2.74	10.99	14.09	95	3.76	A	1200	A++	8.17	9.0	386
	1.5+2.0+2.5+2.5	1.41	1.88	2.35	2.35	---	2.63	8.00	8.42	0.50	1.95	2.23	2.27	8.93	10.18	95	4.10	A	975	A++	8.35	8.0	336
	1.5+2.0+2.5+3.5	1.26	1.68	2.11	2.95	---	2.77	8.00	8.96	0.53	1.94	2.69	2.44	8.88	12.30	95	4.14	A	970	A++	8.37	8.0	335
	1.5+2.0+2.5+4.2	1.25	1.67	2.08	3.50	---	2.88	8.50	9.30	0.56	2.24	2.87	2.57	10.26	13.12	95	3.80	A	1120	A++	8.17	8.5	364
	1.5+2.0+2.5+5.0	1.23	1.64	2.05	4.09	---	2.99	9.00	9.49	0.56	2.44	2.89	2.57	11.17	13.24	95	3.69	A	1220	A++	8.14	9.0	387
	1.5+2.0+2.5+6.0	1.13	1.50	1.88	4.50	---	3.14	9.00	10.01	0.59	2.41	3.01	2.69	11.03	13.77	95	3.74	A	1205	A++	8.16	9.0	386
	1.5+2.0+2.5+7.1	1.03	1.37	1.72	4.88	---	3.30	9.00	10.16	0.60	2.38	3.08	2.74	10.90	14.09	95	3.79	A	1190	A++	8.17	9.0	386
	1.5+2.0+3.5+3.5	1.24	1.66	2.90	2.90	---	2.92	8.70	9.31	0.56	2.34	2.87	2.57	10.71	13.12	95	3.72	A	1170	A++	8.15	8.7	374
	1.5+2.0+3.5+4.2	1.21	1.61	2.81	3.38	---	3.02	9.00	9.51	0.56	2.45	2.99	2.57	11.22	13.69	95	3.67	A	1225	A++	8.14	9.0	387
	1.5+2.0+3.5+5.0	1.13	1.50	2.63	3.75	---	3.14	9.00	9.68	0.59	2.39	3.02	2.69	10.94	13.81	95	3.77	A	1195	A++	8.14	9.0	387
	1.5+2.0+3.5+6.0	1.04	1.38	2.42	4.15	---	3.29	9.00	10.15	0.59	2.36	3.08	2.69	10.81	14.09	95	3.82	A	1180	A++	8.15	9.0	387
	1.5+2.0+3.5+7.1	0.96	1.28	2.23	4.53	---	3.45	9.00	10.17	0.63	2.33	3.08	2.86	10.67	14.09	95	3.87	A	1165	A++	8.17	9.0	386
5MXM90N2V1B	1.5+2.0+4.2+4.2	1.13	1.51	3.18	3.18	---	3.13	9.00	9.52	0.59	2.44	2.99	2.69	11.17	13.69	95	3.69	A	1220	A++	8.15	9.0	387
	1.5+2.0+4.2+5.0	1.06	1.42	2.98	3.54	---	3.24	9.00	9.69	0.63	2.38	3.02	2.86	10.90	13.81	95	3.79	A	1190	A++	8.14	9.0	387
	1.5+2.0+4.2+6.0	0.99	1.31	2.76	3.94	---	3.39	9.00	10.16	0.63	2.35	3.08	2.86	10.76	14.09	95	3.84	A	1175	A++	8.16	9.0	386
	1.5+2.0+4.2+7.1	0.91	1.22	2.55	4.32	---	3.54	9.00	10.63	0.65	2.32	3.57	2.99	10.62	16.33	95	3.89	A	1160	A++	8.18	9.0	386
	1.5+2.0+5.0+5.0	1.00	1.33	3.33	3.33	---	3.36	9.00	9.87	0.63	2.26	3.04	2.86	10.35	13.93	95	3.99	A	1130	A++	8.19	9.0	385
	1.5+2.0+5.0+6.0	0.93	1.24	3.10	3.72	---	3.50	9.00	10.34	0.63	2.23	3.11	2.86	10.21	14.22	95	4.04	A	1115	A++	8.20	9.0	384
	1.5+2.0+5.0+7.1	0.87	1.15	2.88	4.10	---	3.66	9.00	10.71	0.65	2.20	3.45	2.99	10.07	15.80	95	4.09	A	1100	A++	8.22	9.0	384
	1.5+2.0+6.0+6.0	0.87	1.16	3.48	3.48	---	3.65	9.00	10.70	0.65	2.22	3.10	2.99	10.17	14.17	95	4.06	A	1110	A++	8.21	9.0	384
	1.5+2.5+2.5+2.5	1.33	2.22	2.22	2.22	---	2.70	8.00	8.70	0.53	1.94	2.39	2.44	8.88	10.96	95	4.14	A	970	A++	8.37	8.0	335
	1.5+2.5+2.5+3.5	1.28	2.13	2.13	2.98	---	2.85	8.50	9.21	0.53	2.24	2.87	2.44	10.26	13.12	95	3.80	A	1120	A++	8.17	8.5	364
	1.5+2.5+2.5+4.2	1.26	2.10	2.10	3.53	---	2.95	9.00	9.31	0.56	2.44	2.87	2.57	11.17	13.12	95	3.69	A	1220	A++	8.15	9.0	387
	1.5+2.5+2.5+5.0	1.17	1.96	1.96	3.91	---	3.07	9.00	9.68	0.59	2.38	3.02	2.69	10.90	13.81	95	3.79	A	1190	A++	8.14	9.0	387
	1.5+2.5+2.5+6.0	1.08	1.80	1.80	4.32	---	3.21	9.00	10.14	0.59	2.35	3.08	2.69	10.76	14.09	95	3.84	A	1175	A++	8.16	9.0	386
	1.5+2.5+2.5+7.1	0.99	1.65	1.65	4.70	---	3.38	9.00	10.16	0.63	2.32	3.08	2.86	10.62	14.09	95	3.89	A	1160	A++	8.18	9.0	386
	1.5+2.5+3.5+3.5	1.23	2.05	2.86	2.86	---	2.99	9.00	9.31	0.56	2.36	2.87	2.57	10.81	13.12	95	3.82	A	1180	A++	8.22	9.0	384
	1.5+2.5+3.5+4.2	1.15	1.92	2.69	3.23	---	3.10	9.00	9.51	0.59	2.35	2.99	2.69	10.76	13.69	95	3.84	A	1175	A++	8.22	9.0	383
	1.5+2.5+3.5+5.0	1.08	1.80	2.52	3.60	---	3.21	9.00	9.68	0.59	2.29	3.02	2.69	10.49	13.81	95	3.94	A	1145	A++	8.22	9.0	384
	1.5+2.5+3.5+6.0	1.00	1.67	2.33	4.00	---	3.36	9.00	10.15	0.63	2.26	3.08	2.86	10.35	14.09	95	3.99	A	1130	A++	8.23	9.0	383
	1.5+2.5+3.5+7.1	0.92	1.54	2.16	4.38	---	3.51	9.00	10.17	0.65	2.23	3.08	2.99	10.21	14.09	95	4.04	A	1115	A++	8.25	9.0	382
	1.5+2.5+4.2+4.2	1.09	1.81	3.05	3.05	---	3.20	9.00	9.52	0.59	2.33	2.99	2.69	10.67	13.69	95	3.86	A	1165	A++	8.23	9.0	383
	1.5+2.5+4.2+5.0	1.02	1.70	2.86	3.41	---	3.32	9.00	9.69	0.63	2.28	3.02	2.86	10.44	13.81	95	3.96	A	1140	A++	8.22	9.0	383
	1.5+2.5+4.2+6.0	0.95	1.58	2.66	3.80	---	3.46	9.00	10.16	0.63	2.25	3.08	2.86	10.30	14.09	95	4.01	A	1125	A++	8.24	9.0	383
	1.5+2.5+4.2+7.1	0.88	1.47	2.47	4.18	---	3.62	9.00	10.68	0.65	2.22	3.64	2.99	10.17	16.66	95	4.06	A	1110	A++	8.25	9.0	382
	1.5+2.5+5.0+5.0	0.96	1.61	3.21	3.21	---	3.20	9.00	9.52	0.59	2.26	2.99	2.69	10.35	13.69	95	3.98	A	1130	A++	8.23	9.0	383
	1.5+2.5+5.0+6.0	0.90	1.50	3.00	3.60	---	3.32	9.00	9.69	0.63	2.24	3.02	2.86	10.26	13.81	95	4.03	A	1120	A++	8.24	9.0	382
	1.5+3.5+3.5+3.5	1.13	2.63	2.63	2.63	---	3.14	9.00	9.51	0.59	2.35	2.99	2.69	10.76	13.69	95	3.84	A	1175	A++	8.21	9.0	384
	1.5+3.5+3.5+4.2	1.06	2.48	2.48	2.98	---	3.24	9.00	9.52	0.63	2.33	2.99	2.86	10.67	13.69	95	3.86	A	1165	A++	8.22	9.0	384
	1.5+3.5+3.5+5.0	1.00	2.33	2.33	3.33	---	3.36	9.00	9.69	0.63	2.28	3.02	2.86	10.44	13.81	95	3.96	A	1140	A++	8.21	9.0	384
	1.5+3.5+3.5+6.0	0.93	2.17	2.17	3.72	---	3.50	9.00	10.16	0.63	2.25	3.08	2.86	10.30	14.09	95	4.01	A	1125	A++	8.23	9.0	383
	1.5+3.5+3.5+7.1	0.87	2.02	2.02	4.10	---	3.66	9.00	10.71	0.65	2.22	3.71	2.99	10.17	16.99	95	4.06	A	1110	A++	8.24	9.0	383
	1.5+3.5+4.2+4.2	1.01	2.35	2.82	2.82	---	3.35	9.00	9.52	0.63	2.32	3.00	2.86	10.62	13.73	95	3.88	A	1160	A++	8.22	9.0	383
	1.5+3.5+4.2+5.0	0.95	2.22	2.66	3.17	---	3.46	9.00	9.70	0.65	2.26	3.02	2.99	10.35	13.81	95	3.98	A	1130	A++	8.22	9.0	384
	1.5+3.5+4.2+6.0	0.89	2.07	2.49	3.55	---	3.60	9.00	10.68	0.65	2.24	3.71	2.99	10.26	16.99	95	4.03	A	1120	A++	8.23	9.0	383
	1.5+3.5+5.0+5.0	0.90	2.10	3.00	3.00	---	3.57	9.00	10.47	0.65	2.25	3.73	2.99	10.30	17.07	95	4.00	A	1125	A++	8.22	9.0	383
	1.5+4.2+4.2+4.2	0.96	---	2.68	2.68	2.68	3.45	9.00	9.53	0.65	2.31	3.00	2.99	10.58	13.73	95	3.90	A	1155	A++	8.23	9.0	383
	1.5+4.2+4.2+5.0	0.91	---	2.54	2.54	3.02	3.56	9.00	10.29	0.65	2.25	3.69	2.99	10.30	16.90	95	4.00	A	1125	A++	8.22	9.0	383
	2.0+2.0+2.0+2.0	1.88	1.88	1.88	1.88	---	2.55	7.50	8.12	0.50	1.63	2.06	2.27	7.46	9.45	95	4.62	A	815	A+++	8.58	7.5	306
	2.0+2.0+2.0+2.5	1.88	1.88	1.88	2.35	---	2.63	8.00	8.42	0.50	1.90	2.23	2.27	8.70	10.18	95	4.22	A	950	A++	8.38	8.0	334
	2.0+2.0+2.0+3.5	1.68	1.68	1.68	2.95	---	2.77	8.00	8.96	0.53	1.89	2.51	2.44	8.65	11.49	95	4.24	A	945	A++	8.38	8.0	335
	2.0+2.0+2.0+4.2	1.67	1.67	1.67	3.50	---	2.88	8.50	9.30	0.56	2.33	2.87	2.57	10.67	13.12	95	3.65	A	1165	A++	8.02	8.5	371

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	E room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
	2.0+2.0+2.0+5.0	1.64	1.64	1.64	4.09	---	2.99	9.00	9.49	0.56	2.54	2.89	2.57	11.63	13.24	95	3.55	A	1270	A++	7.93	9.0	398
	2.0+2.0+2.0+6.0	1.50	1.50	1.50	4.50	---	3.14	9.00	10.01	0.60	2.50	3.01	2.74	11.45	13.77	95	3.60	A	1250	A++	7.96	9.0	396
	2.0+2.0+2.0+7.1	1.37	1.37	1.37	4.88	---	3.30	9.00	10.16	0.60	2.48	3.08	2.74	11.36	14.09	95	3.63	A	1240	A++	7.96	9.0	396
	2.0+2.0+2.5+2.5	1.73	1.73	2.17	2.17	---	2.70	7.80	8.70	0.53	1.81	2.39	2.44	8.29	10.96	95	4.32	A	905	A++	8.48	7.8	322
	2.0+2.0+2.5+3.5	1.70	1.70	2.13	2.98	---	2.85	8.50	9.21	0.53	2.33	2.87	2.44	10.67	13.12	95	3.65	A	1165	A++	8.02	8.5	371
	2.0+2.0+2.5+4.2	1.68	1.68	2.10	3.53	---	2.95	9.00	9.31	0.56	2.61	2.87	2.57	11.95	13.12	95	3.45	A	1305	A++	7.93	9.0	398
	2.0+2.0+2.5+5.0	1.57	1.57	1.96	3.91	---	3.07	9.00	9.68	0.59	2.54	3.02	2.69	11.63	13.81	95	3.55	A	1270	A++	7.93	9.0	397
	2.0+2.0+2.5+6.0	1.44	1.44	1.80	4.32	---	3.21	9.00	10.14	0.60	2.50	3.08	2.74	11.45	14.09	95	3.60	A	1250	A++	7.95	9.0	397
	2.0+2.0+2.5+7.1	1.32	1.32	1.65	4.70	---	3.38	9.00	10.16	0.63	2.47	3.08	2.86	11.31	14.09	95	3.65	A	1235	A++	7.97	9.0	396
	2.0+2.0+3.5+3.5	1.64	1.64	2.86	2.86	---	2.99	9.00	9.31	0.56	2.46	2.87	2.57	11.26	13.12	95	3.67	A	1230	A++	8.07	9.0	391
	2.0+2.0+3.5+4.2	1.54	1.54	2.69	3.23	---	3.10	9.00	9.51	0.59	2.44	2.99	2.69	11.17	13.69	95	3.69	A	1220	A++	8.07	9.0	391
	2.0+2.0+3.5+5.0	1.44	1.44	2.52	3.60	---	3.21	9.00	9.68	0.59	2.38	3.02	2.69	10.90	13.81	95	3.79	A	1190	A++	8.07	9.0	391
	2.0+2.0+3.5+6.0	1.33	1.33	2.33	4.00	---	3.36	9.00	10.15	0.63	2.35	3.08	2.86	10.76	14.09	95	3.84	A	1175	A++	8.08	9.0	390
	2.0+2.0+3.5+7.1	1.23	1.23	2.16	4.38	---	3.51	9.00	10.17	0.65	2.32	3.08	2.99	10.62	14.09	95	3.89	A	1160	A++	8.10	9.0	389
	2.0+2.0+4.2+4.2	1.45	1.45	3.05	3.05	---	3.20	9.00	9.52	0.59	2.43	2.99	2.69	11.13	13.69	95	3.71	A	1215	A++	8.08	9.0	390
	2.0+2.0+4.2+5.0	1.36	1.36	2.86	3.41	---	3.32	9.00	9.69	0.63	2.37	3.02	2.86	10.85	13.81	95	3.81	A	1185	A++	8.07	9.0	390
	2.0+2.0+4.2+6.0	1.27	1.27	2.66	3.80	---	3.46	9.00	10.16	0.63	2.33	3.08	2.86	10.67	14.09	95	3.86	A	1165	A++	8.09	9.0	390
	2.0+2.0+4.2+7.1	1.18	1.18	2.47	4.18	---	3.62	9.00	10.68	0.65	2.31	3.57	2.99	10.58	16.33	95	3.91	A	1155	A++	8.11	9.0	389
	2.0+2.0+5.0+5.0	1.29	1.29	3.21	3.21	---	3.43	9.00	9.87	0.63	2.35	3.04	2.86	10.76	13.93	95	3.83	A	1175	A++	8.08	9.0	390
	2.0+2.0+5.0+6.0	1.20	1.20	3.00	3.60	---	3.57	9.00	10.66	0.65	2.32	3.45	2.99	10.62	15.80	95	3.88	A	1160	A++	8.10	9.0	389
	2.0+2.5+2.5+2.5	1.68	2.11	2.11	2.11	---	2.77	8.00	8.96	0.53	1.89	2.51	2.44	8.65	11.49	95	4.24	A	945	A++	8.40	8.0	334
	2.0+2.5+2.5+3.5	1.66	2.07	2.07	2.90	---	2.92	8.70	9.30	0.56	2.39	2.87	2.57	10.94	13.12	95	3.65	A	1195	A++	8.03	8.7	379
	2.0+2.5+2.5+4.2	1.61	2.01	2.01	3.38	---	3.02	9.00	9.50	0.56	2.61	2.99	2.57	11.95	13.69	95	3.45	A	1305	A++	7.93	9.0	398
	2.0+2.5+2.5+5.0	1.50	1.88	1.88	3.75	---	3.14	9.00	9.68	0.59	2.54	3.02	2.69	11.63	13.81	95	3.55	A	1270	A++	7.93	9.0	397
	2.0+2.5+2.5+6.0	1.38	1.73	1.73	4.15	---	3.29	9.00	10.14	0.60	2.50	3.08	2.74	11.45	14.09	95	3.60	A	1250	A++	7.95	9.0	397
	2.0+2.5+2.5+7.1	1.28	1.60	1.60	4.53	---	3.45	9.00	10.16	0.63	2.47	3.08	2.86	11.31	14.09	95	3.65	A	1235	A++	7.97	9.0	396
	2.0+2.5+3.5+3.5	1.57	1.96	2.74	2.74	---	3.07	9.00	9.50	0.59	2.46	2.99	2.69	11.26	13.69	95	3.67	A	1230	A++	8.07	9.0	391
	2.0+2.5+3.5+4.2	1.48	1.84	2.58	3.10	---	3.17	9.00	9.51	0.59	2.44	2.99	2.69	11.17	13.69	95	3.69	A	1220	A++	8.07	9.0	391
	2.0+2.5+3.5+5.0	1.38	1.73	2.42	3.46	---	3.29	9.00	9.68	0.63	2.38	3.02	2.86	10.90	13.81	95	3.79	A	1190	A++	8.07	9.0	391
	2.0+2.5+3.5+6.0	1.29	1.61	2.25	3.86	---	3.43	9.00	10.15	0.63	2.35	3.08	2.86	10.76	14.09	95	3.84	A	1175	A++	8.08	9.0	390
	2.0+2.5+3.5+7.1	1.19	1.49	2.09	4.23	---	3.59	9.00	10.63	0.65	2.32	3.57	2.99	10.62	16.33	95	3.89	A	1160	A++	8.10	9.0	389
	2.0+2.5+4.2+4.2	1.40	1.74	2.93	2.93	---	3.27	9.00	9.52	0.63	2.43	2.99	2.86	11.13	13.69	95	3.71	A	1215	A++	8.08	9.0	390
	2.0+2.5+4.2+5.0	1.31	1.64	2.76	3.28	---	3.39	9.00	9.69	0.63	2.37	3.02	2.86	10.85	13.81	95	3.81	A	1185	A++	8.07	9.0	390
	2.0+2.5+4.2+6.0	1.22	1.53	2.57	3.67	---	3.53	9.00	10.62	0.65	2.33	3.56	2.99	10.67	16.29	95	3.86	A	1165	A++	8.09	9.0	390
	2.0+2.5+5.0+5.0	1.24	1.55	3.10	3.10	---	3.50	9.00	9.87	0.65	2.35	3.04	2.99	10.76	13.93	95	3.83	A	1175	A++	8.08	9.0	390
	2.0+2.5+5.0+6.0	1.16	1.45	2.90	3.48	---	3.65	9.00	10.70	0.65	2.32	3.52	2.99	10.62	16.13	95	3.88	A	1160	A++	8.10	9.0	389
	2.0+3.5+3.5+3.5	1.44	2.52	2.52	2.52	---	3.21	9.00	9.51	0.63	2.43	2.99	2.86	11.13	13.69	95	3.71	A	1215	A++	8.08	9.0	390
	2.0+3.5+3.5+4.2	1.36	2.39	2.39	2.86	---	3.32	9.00	9.52	0.63	2.42	2.99	2.86	11.08	13.69	95	3.73	A	1210	A++	8.08	9.0	390
	2.0+3.5+3.5+5.0	1.29	2.25	2.25	3.21	---	3.43	9.00	9.69	0.65	2.35	3.02	2.99	10.76	13.81	95	3.83	A	1175	A++	8.08	9.0	390
5MXM90N2V1B	2.0+3.5+3.5+6.0	1.20	2.10	2.10	3.60	---	3.57	9.00	10.61	0.65	2.32	3.57	2.99	10.62	16.33	95	3.88	A	1160	A++	8.10	9.0	389
	2.0+3.5+4.2+4.2	1.29	2.27	2.72	2.72	---	3.42	9.00	9.52	0.65	2.40	3.00	2.99	10.99	13.73	95	3.75	A	1200	A++	8.09	9.0	390
	2.0+3.5+4.2+5.0	1.22	2.14	2.57	3.06	---	3.53	9.00	10.20	0.65	2.34	3.55	2.99	10.71	16.25	95	3.85	A	1170	A++	8.09	9.0	390
	2.0+3.5+5.0+5.0	1.16	2.03	2.90	2.90	---	3.65	9.00	10.47	0.69	2.34	3.73	3.16	10.71	17.07	95	3.85	A	1170	A++	8.09	9.0	390
	2.0+4.2+4.2+4.2	1.23	---	2.59	2.59	2.59	3.51	9.00	9.53	0.65	2.39	3.00	2.99	10.94	13.73	95	3.77	A	1195	A++	8.10	9.0	389
	2.0+4.2+4.2+5.0	1.17	---	2.45	2.45	2.92	3.63	9.00	10.21	0.69	2.33	3.55	3.16	10.67	16.25	95	3.87	A	1165	A++	8.09	9.0	389
	2.5+2.5+2.5+2.5	2.13	2.13	2.13	2.13	---	2.85	8.50	9.21	0.53	2.28	2.87	2.44	10.44	13.12	95	3.73	A	1140	A++	8.07	8.5	369
	2.5+2.5+2.5+3.5	2.05	2.05	2.05	2.86	---	2.99	9.00	9.30	0.56	2.48	2.87	2.57	11.36	13.12	95	3.63	A	1240	A++	8.04	9.0	392
	2.5+2.5+2.5+4.2	1.92	1.92	1.92	3.23	---	3.10	9.00	9.50	0.59	2.47	2.99	2.69	11.31	13.69	95	3.65	A	1235	A++	8.05	9.0	392
	2.5+2.5+2.5+5.0	1.80	1.80	1.80	3.60	---	3.21	9.00	9.68	0.59	2.40	3.02	2.69	10.99	13.81	95	3.75	A	1200	A++	8.04	9.0	392
	2.5+2.5+2.5+6.0	1.67	1.67	1.67	4.00	---	3.36	9.00	10.14	0.63	2.37	3.08	2.86	10.85	14.09	95	3.80	A	1185	A++	8.06	9.0	391
	2.5+2.5+2.5+7.1	1.54	1.54	1.54	4.38	---	3.51	9.00	10.16	0.65	2.34	3.08	2.99	10.71	14.09	95	3.85	A	1170	A++	8.08	9.0	390
	2.5+2.5+3.5+3.5	1.88	1.88	2.63	2.63	---	3.14	9.00	9.50	0.59	2.47	2.99	2.69	11.31	13.69	95	3.65	A	1235	A++	8.05	9.0	392
	2.5+2.5+3.5+4.2	1.77	1.77	2.48	2.98	---	3.24	9.00	9.51	0.63	2.46	2.99	2.86	11.26	13.69	95	3.67	A	1230	A++	8.05	9.0	391
	2.5+2.5+3.5+5.0	1.67	1.67	2.33	3.33	---	3.36	9.00	9.68	0.63	2.39	3.02	2.86	10.94	13.81	95	3.77	A	1195	A++	8.05	9.0	391
	2.5+2.5+3.5+6.0	1.55	1.55	2.17	3.72	---	3.50	9.00	10.15	0.65	2.36	3.08	2.99	10.81	14.09	95	3.82	A	1180	A++	8.07	9.0	391
	2.5+2.5+3.5+7.1	1.44	1.44	2.02	4.10	---	3.66	9.00	10.63	0.65	2.33	3.57	2.99	10.67	16.33	95	3.87	A	1165	A++	8.09	9.0	390
	2.5+2.5+4.2+4.2	1.68	1.68	2.82	2.82	---	3.35	9.00	9.52	0.63	2.44	2.99	2.86	11.17	13.69	95	3.69	A	1220	A++	8.06	9.0	391
	2.5+2.5+4.2+5.0	1.58	1.58	2.66	3.17	---	3.46	9.00	9.69	0.65	2.38	3.02	2.99	10.90	13.81	95	3.79	A	1190	A++	8.06	9.0	391
	2.5+2.5+4.2+6.0	1.48	1.48	2.49	3.55	---	3.60	9.00	10.68	0.65	2.35	3.56	2.99	10.76	16.29	95	3.84	A	1175	A++	8.08	9.0	390
	2.5+2.5+5.0+5.0	1.50	1.50	3.00	3.00	---	3.57	9.00	10.46	0.65	2.37	3.72	2.99	10.85	17.03	95	3.81	A	1185	A++	8.07	9.0	391
	2.5+3.5+3.5+3.5	1.73	2.42	2.42	2.42	---	3.29	9.00	9.53	0.63	2.46	2.99	2.86	11.26	13.69	95	3.67	A	1230	A++	8.07	9.0	390
	2.5+3.5+3.5+4.2	1.64	2.30	2.30	2.76	---	3.39	9.00	9.52	0.65	2.44	2.99	2.99	11.17	13.69	95	3.69	A	1220	A++	8.08	9.0	390
	2.5+3.5+3.5+5.0	1.55	2.17	2.17	3.10	---	3.50	9.00	9.69	0.65	2.38	3.02	2.99	10.90	13.81	95	3.79	A	1190	A++	8.07	9.0	390
	2.5+3.5+3.5+6.0	1.45	2.03	2.03	3.48	---	3.65	9.00	10.61	0.65	2.35	3.57	2.99	10.76	16.33	95	3.84	A	1175	A++	8.09	9.0	390
	2.5+3.5+4.2+4.2	1.56	2.19	2.63	2.63	---	3.48	9.00	9.52	0.65	2.43	3.00	2.99	11.13	13.73	95	3.71	A	1215	A++	8.08	9.0	390
	2.5+3.5+4.2+5.0	1.48	2.07	2.49	2.96	---	3.60	9.00	10.20	0.69	2.37	3.55	3.16	10.85	16.25	95	3.81	A	1185	A++	8.08	9.0	390
	2.5+4.2+4.2+4.2	1.49	2.50	2.50	2.50	---	3.59	9.00	10.03	0.69	2.42	3.52	3.16	11.08	16.09	95	3.73	A	1210	A++	8.09	9.0	390
	3.5+3.5+3.5+3.5	2.25	2.25	2.25	2.25	---	3.43	9.00	9.51	0.65	2.44	2.99	2.99	11.17	13.69	95	3.69	A	1220	A++	8.08	9.0	390
	3.5+3.5+3.5+4.2	2.14	2.14	2.14	2.57	---	3.53	9.00	10.02	0.69	2.43	3.52	3.16	11.13	16.09	95	3.71	A	1215	A++	8.08	9.0	390
	3.5+3.5+3.5+5.0	2.03	2.03	2.03	2.90	---	3.65	9.00	10.15	0.69	2.37	3.48	3.16	10.85	15.93	95	3.81	A	1185	A++	8.08	9.0	390
	3.5+3.5+4.2+4.2	2.05	2.05	2.45	2.45	---	3.63	9.00	10.03	0.69	2.42	3.52	3.16	11.08	16.09	95	3.73	A	1210	A++	8.09	9.0	390
	1.5+1.5+1.5+1.5+1.5	1.50	1.50	1.50	1.50	1.50	2.48	7.50	7.79	0.48	1.55	1.79	2.19	7.10	8.19	95	4.85	A	775	A++	7.90	7.5	333
	1.5+1.5+1.5+1.5+2.0	1.41	1.41	1.41	1.41	1.88	2.55	7.50	8.12	0.48	1.55	1.94	2.19	7.10	8.88	95	4.87	A	775	A++	7.89	7.5	333
	1.5+1.5+1.5+1.5+2.5	1.41	1.41	1.41	1.41	2.35	2.63	8.00	8.42	0.51	1.75	2.10	2.32	8.01	9.61	95	4.59	A	875	A++	7.80	8.0	359
	1.5+1.5+1.5+1.5+3.5	1.26	1.26	1.26	1.26	2.95	2.77	8.00	8.96	0.53	1.73	2.39	2.44	7.92	10.92	95	4.63	A	865	A++	7.81	8.0	359
	1.5+1.5+1.5+1.5+4.2	1.32	1.32	1.32	1.32	3.71	2.88	9.00	9.30	0.53	2.20	2.56	2.44	10.07	11.73	95	4.10	A	1100	A++	7.66	9.0	411
	1.5+1.5+1.5+1.5+5.0	1.23	1.23	1.23	1.23	4.09	2.99	9.00	9.64	0.56	2.15	2.64	2.57	9.84	12.10	95	4.20	A	1075	A++	7.69	9.0	410
	1.5+1.5+1.5+1.5+6.0	1.13	1.13	1.13	1.13	4.50	3.14	9.00	10.01	0.57	2.12	2.69	2.61	9.71	12.30	95	4.25	A	1060	A++	7.71	9.0	409
	1.5+1.5+1.5+1.5+7.1	1.03	1.03	1.03	1.03	4.88	3.30	9.00	10.32	0.60	2.10	2.82	2.74	9.62	12.91	95	4.30	A	1050	A++	7.73	9.0	408

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	E room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
	1.5+1.5+1.5+2.0+2.0	1.41	1.41	1.41	1.88	1.88	2.63	8.00	8.42	0.51	1.75	2.10	2.32	8.01	9.61	95	4.59	A	875	A++	7.80	8.0	359
	1.5+1.5+1.5+2.0+2.5	1.33	1.33	1.33	1.78	2.22	2.70	8.00	8.70	0.51	1.75	2.22	2.32	8.01	10.14	95	4.59	A	875	A++	7.80	8.0	359
	1.5+1.5+1.5+2.0+3.5	1.28	1.28	1.28	1.70	2.98	2.85	8.50	9.21	0.53	1.95	2.50	2.44	8.93	11.45	95	4.37	A	975	A++	7.76	8.5	383
	1.5+1.5+1.5+2.0+4.2	1.26	1.26	1.26	1.68	3.53	2.95	9.00	9.52	0.53	2.06	2.69	2.44	9.43	12.30	95	4.37	A	1030	A++	7.81	9.0	404
	1.5+1.5+1.5+2.0+5.0	1.17	1.17	1.17	1.57	3.91	3.07	9.00	9.83	0.56	2.02	2.78	2.57	9.25	12.71	95	4.47	A	1010	A++	7.83	9.0	403
	1.5+1.5+1.5+2.0+6.0	1.08	1.08	1.08	1.44	4.32	3.21	9.00	10.16	0.57	2.00	2.75	2.61	9.16	12.59	95	4.52	A	1000	A++	7.85	9.0	402
	1.5+1.5+1.5+2.0+7.1	0.99	0.99	0.99	1.32	4.70	3.38	9.00	10.43	0.60	1.97	2.96	2.74	9.02	13.56	95	4.57	A	985	A++	7.86	9.0	401
	1.5+1.5+1.5+2.5+2.5	1.26	1.26	1.26	2.11	2.11	2.77	8.00	8.96	0.53	1.74	2.39	2.44	7.97	10.92	95	4.61	A	870	A++	7.81	8.0	359
	1.5+1.5+1.5+2.5+3.5	1.24	1.24	1.24	2.07	2.90	2.92	8.70	9.44	0.53	2.06	2.63	2.44	9.43	12.02	95	4.24	A	1030	A++	7.71	8.7	395
	1.5+1.5+1.5+2.5+4.2	1.21	1.21	1.21	2.01	3.38	3.02	9.00	9.72	0.56	2.19	2.82	2.57	10.03	12.91	95	4.12	A	1095	A++	7.66	9.0	411
	1.5+1.5+1.5+2.5+5.0	1.13	1.13	1.13	1.88	3.75	3.14	9.00	10.01	0.56	2.14	2.90	2.57	9.80	13.28	95	4.22	A	1070	A++	7.69	9.0	410
	1.5+1.5+1.5+2.5+6.0	1.04	1.04	1.04	1.73	4.15	3.29	9.00	10.29	0.60	2.11	2.82	2.74	9.66	12.91	95	4.27	A	1055	A++	7.70	9.0	409
	1.5+1.5+1.5+2.5+7.1	0.96	0.96	0.96	1.60	4.53	3.45	9.00	10.53	0.60	2.09	2.96	2.74	9.57	13.56	95	4.32	A	1045	A++	7.72	9.0	408
	1.5+1.5+1.5+3.5+3.5	1.17	1.17	1.17	2.74	2.74	3.07	9.00	9.83	0.56	2.18	2.88	2.57	9.98	13.20	95	4.14	A	1090	A++	7.68	9.0	411
	1.5+1.5+1.5+3.5+4.2	1.11	1.11	1.11	2.58	3.10	3.17	9.00	10.07	0.60	2.17	3.02	2.74	9.94	13.81	95	4.16	A	1085	A++	7.68	9.0	410
	1.5+1.5+1.5+3.5+5.0	1.04	1.04	1.04	2.42	3.46	3.29	9.00	10.29	0.60	2.12	3.11	2.74	9.71	14.22	95	4.26	A	1060	A++	7.70	9.0	409
	1.5+1.5+1.5+3.5+6.0	0.96	0.96	0.96	2.25	3.86	3.43	9.00	10.52	0.60	2.09	2.95	2.74	9.57	13.52	95	4.31	A	1045	A++	7.72	9.0	408
	1.5+1.5+1.5+3.5+7.1	0.89	0.89	0.89	2.09	4.23	3.59	9.00	10.67	0.63	2.07	3.10	2.86	9.48	14.17	95	4.36	A	1035	A++	7.74	9.0	407
	1.5+1.5+1.5+4.2+4.2	1.05	1.05	1.05	2.93	2.93	3.27	9.00	10.19	0.60	2.16	3.09	2.74	9.89	14.13	95	4.18	A	1080	A++	7.69	9.0	410
	1.5+1.5+1.5+4.2+5.0	0.99	0.99	0.99	2.76	3.28	3.39	9.00	10.36	0.63	2.11	3.11	2.86	9.66	14.22	95	4.28	A	1055	A++	7.71	9.0	409
	1.5+1.5+1.5+4.2+6.0	0.92	0.92	0.92	2.57	3.67	3.53	9.00	10.62	0.63	2.08	3.03	2.86	9.52	13.85	95	4.33	A	1040	A++	7.73	9.0	408
	1.5+1.5+1.5+5.0+5.0	0.93	0.93	0.93	3.10	3.10	3.50	9.00	10.55	0.63	2.10	3.13	2.86	9.62	14.34	95	4.30	A	1050	A++	7.72	9.0	408
	1.5+1.5+1.5+5.0+6.0	0.87	0.87	0.87	2.90	3.48	3.65	9.00	10.70	0.63	2.07	2.98	2.86	9.48	13.65	95	4.35	A	1035	A++	7.74	9.0	407
	1.5+1.5+2.0+2.0+2.0	1.30	1.30	1.73	1.73	1.73	2.70	7.80	8.70	0.51	1.65	2.22	2.32	7.56	10.14	95	4.73	A	825	A++	7.86	7.8	348
	1.5+1.5+2.0+2.0+2.5	1.26	1.26	1.68	1.68	2.11	2.77	8.00	8.96	0.53	1.74	2.39	2.44	7.97	10.92	95	4.61	A	870	A++	7.81	8.0	359
	1.5+1.5+2.0+2.0+3.5	1.24	1.24	1.66	1.66	2.90	2.92	8.70	9.44	0.53	2.05	2.63	2.44	9.39	12.02	95	4.26	A	1025	A++	7.72	8.7	395
	1.5+1.5+2.0+2.0+4.2	1.21	1.21	1.61	1.61	3.38	3.02	9.00	9.72	0.56	2.18	2.82	2.57	9.98	12.91	95	4.14	A	1090	A++	7.67	9.0	411
	1.5+1.5+2.0+2.0+5.0	1.13	1.13	1.50	1.50	3.75	3.14	9.00	10.01	0.56	2.13	2.90	2.57	9.75	13.28	95	4.24	A	1065	A++	7.71	9.0	409
	1.5+1.5+2.0+2.0+6.0	1.04	1.04	1.38	1.38	4.15	3.29	9.00	10.29	0.60	2.10	2.82	2.74	9.62	12.91	95	4.29	A	1050	A++	7.73	9.0	408
	1.5+1.5+2.0+2.0+7.1	0.96	0.96	1.28	1.28	4.53	3.45	9.00	10.53	0.60	2.08	2.96	2.74	9.52	13.56	95	4.34	A	1040	A++	7.75	9.0	407
	1.5+1.5+2.0+2.5+2.5	1.28	1.28	1.70	2.13	2.13	2.85	8.50	9.21	0.53	1.84	2.50	2.44	8.43	11.45	95	4.63	A	920	A++	7.83	8.5	380
	1.5+1.5+2.0+2.5+3.5	1.23	1.23	1.64	2.05	2.86	2.99	9.00	9.64	0.56	2.18	2.75	2.57	9.98	12.59	95	4.14	A	1090	A++	7.67	9.0	411
	1.5+1.5+2.0+2.5+4.2	1.15	1.15	1.54	1.92	3.23	3.10	9.00	9.90	0.56	2.17	2.95	2.57	9.94	13.48	95	4.16	A	1085	A++	7.68	9.0	411
	1.5+1.5+2.0+2.5+5.0	1.08	1.08	1.44	1.80	3.60	3.21	9.00	10.16	0.60	2.12	3.03	2.74	9.71	13.89	95	4.26	A	1060	A++	7.71	9.0	409
	1.5+1.5+2.0+2.5+6.0	1.00	1.00	1.33	1.67	4.00	3.36	9.00	10.41	0.60	2.09	2.95	2.74	9.57	13.52	95	4.31	A	1045	A++	7.73	9.0	408
	1.5+1.5+2.0+2.5+7.1	0.92	0.92	1.23	1.54	4.38	3.51	9.00	10.61	0.63	2.07	3.03	2.86	9.48	13.85	95	4.36	A	1035	A++	7.76	9.0	406
	1.5+1.5+2.0+3.5+3.5	1.13	1.13	1.50	2.63	2.63	3.14	9.00	10.01	0.56	2.17	3.02	2.57	9.94	13.81	95	4.16	A	1085	A++	7.68	9.0	410
	1.5+1.5+2.0+3.5+4.2	1.06	1.06	1.42	2.48	2.98	3.24	9.00	10.18	0.60	2.16	3.08	2.74	9.89	14.09	95	4.18	A	1080	A++	7.69	9.0	410
	1.5+1.5+2.0+3.5+5.0	1.00	1.00	1.33	2.33	3.33	3.36	9.00	10.36	0.60	2.11	3.11	2.74	9.66	14.22	95	4.28	A	1055	A++	7.72	9.0	408
5MXM90N2V1B	1.5+1.5+2.0+3.5+6.0	0.93	0.93	1.24	2.17	3.72	3.50	9.00	10.59	0.63	2.08	3.03	2.86	9.52	13.85	95	4.33	A	1040	A++	7.74	9.0	407
	1.5+1.5+2.0+3.5+7.1	0.87	0.87	1.15	2.02	4.10	3.66	9.00	10.71	0.65	2.06	3.10	2.99	9.43	14.17	95	4.38	A	1030	A++	7.76	9.0	406
	1.5+1.5+2.0+4.2+4.2	1.01	1.01	1.34	2.82	2.82	3.35	9.00	10.19	0.63	2.15	3.09	2.86	9.84	14.13	95	4.20	A	1075	A++	7.70	9.0	409
	1.5+1.5+2.0+4.2+5.0	0.95	0.95	1.27	2.66	3.17	3.46	9.00	10.36	0.63	2.10	3.11	2.86	9.62	14.22	95	4.30	A	1050	A++	7.73	9.0	408
	1.5+1.5+2.0+4.2+6.0	0.89	0.89	1.18	2.49	3.55	3.60	9.00	10.68	0.63	2.07	3.10	2.86	9.48	14.17	95	4.35	A	1035	A++	7.75	9.0	407
	1.5+1.5+2.0+5.0+5.0	0.90	0.90	1.20	3.00	3.00	3.57	9.00	10.66	0.63	2.00	3.28	2.86	9.16	14.99	95	4.50	A	1000	A++	7.70	9.0	410
	1.5+1.5+2.5+2.5+2.5	1.24	1.24	2.07	2.07	2.07	2.92	8.70	9.44	0.53	2.04	2.63	2.44	9.34	12.02	95	4.28	A	1020	A++	7.72	8.7	395
	1.5+1.5+2.5+2.5+3.5	1.17	1.17	1.96	1.96	2.74	3.07	9.00	9.83	0.56	2.17	2.88	2.57	9.94	13.20	95	4.16	A	1085	A++	7.67	9.0	411
	1.5+1.5+2.5+2.5+4.2	1.11	1.11	1.84	1.84	3.10	3.17	9.00	10.07	0.60	2.16	3.02	2.74	9.89	13.81	95	4.18	A	1080	A++	7.68	9.0	411
	1.5+1.5+2.5+2.5+5.0	1.04	1.04	1.73	1.73	3.46	3.29	9.00	10.29	0.60	2.11	3.11	2.74	9.66	14.22	95	4.28	A	1055	A++	7.71	9.0	409
	1.5+1.5+2.5+2.5+6.0	0.96	0.96	1.61	1.61	3.86	3.43	9.00	10.52	0.60	2.08	3.03	2.74	9.52	13.85	95	4.33	A	1040	A++	7.73	9.0	408
	1.5+1.5+2.5+2.5+7.1	0.89	0.89	1.49	1.49	4.23	3.59	9.00	10.67	0.63	2.06	3.10	2.86	9.43	14.17	95	4.38	A	1030	A++	7.75	9.0	406
	1.5+1.5+2.5+3.5+3.5	1.08	1.08	1.80	2.52	2.52	3.21	9.00	10.16	0.60	2.16	3.08	2.74	9.89	14.09	95	4.18	A	1080	A++	7.68	9.0	410
	1.5+1.5+2.5+3.5+4.2	1.02	1.02	1.70	2.39	2.86	3.32	9.00	10.18	0.60	2.15	3.08	2.74	9.84	14.09	95	4.20	A	1075	A++	7.69	9.0	410
	1.5+1.5+2.5+3.5+5.0	0.96	0.96	1.61	2.25	3.21	3.43	9.00	10.36	0.63	2.10	3.11	2.86	9.62	14.22	95	4.30	A	1050	A++	7.72	9.0	408
	1.5+1.5+2.5+3.5+6.0	0.90	0.90	1.50	2.10	3.60	3.57	9.00	10.66	0.63	2.07	3.10	2.86	9.48	14.17	95	4.35	A	1035	A++	7.74	9.0	407
	1.5+1.5+2.5+4.2+4.2	0.97	0.97	1.62	2.72	2.72	3.42	9.00	10.19	0.63	2.14	3.09	2.86	9.80	14.13	95	4.22	A	1070	A++	7.70	9.0	410
	1.5+1.5+2.5+4.2+5.0	0.92	0.92	1.53	2.57	3.06	3.53	9.00	10.62	0.63	2.09	3.39	2.86	9.57	15.52	95	4.32	A	1045	A++	7.73	9.0	408
	1.5+1.5+2.5+5.0+5.0	0.87	0.87	1.45	2.90	2.90	3.65	9.00	10.70	0.65	2.02	3.28	2.99	9.25	14.99	95	4.47	A	1010	A++	7.67	9.0	411
	1.5+1.5+3.5+3.5+3.5	1.00	1.00	2.33	2.33	2.33	3.36	9.00	10.18	0.63	2.15	3.08	2.86	9.84	14.09	95	4.20	A	1075	A++	7.69	9.0	410
	1.5+1.5+3.5+3.5+4.2	0.95	0.95	2.22	2.22	2.66	3.46	9.00	10.19	0.63	2.14	3.09	2.86	9.80	14.13	95	4.22	A	1070	A++	7.70	9.0	410
	1.5+1.5+3.5+3.5+5.0	0.90	0.90	2.10	2.10	3.00	3.57	9.00	10.66	0.65	2.09	3.38	2.99	9.57	15.48	95	4.32	A	1045	A++	7.73	9.0	408
	1.5+1.5+3.5+4.2+4.2	0.91	0.91	2.11	2.54	2.54	3.56	9.00	10.65	0.65	2.13	3.57	2.99	9.75	16.33	95	4.24	A	1065	A++	7.71	9.0	409
	1.5+2.0+2.0+2.0+2.0	1.26	1.68	1.68	1.68	1.68	2.77	8.00	8.96	0.53	1.73	2.39	2.44	7.92	10.92	95	4.63	A	865	A++	7.81	8.0	359
	1.5+2.0+2.0+2.0+2.5	1.28	1.70	1.70	1.70	2.13	2.85	8.50	9.21	0.53	1.83	2.50	2.44	8.38	11.45	95	4.65	A	915	A++	7.83	8.5	380
	1.5+2.0+2.0+2.0+3.5	1.23	1.64	1.64	1.64	2.86	2.99	9.00	9.64	0.56	2.17	2.75	2.57	9.94	12.59	95	4.16	A	1085	A++	7.67	9.0	411
	1.5+2.0+2.0+2.0+4.2	1.15	1.54	1.54	1.54	3.23	3.10	9.00	9.90	0.56	2.16	2.95	2.57	9.89	13.48	95	4.18	A	1080	A++	7.68	9.0	411
	1.5+2.0+2.0+2.0+5.0	1.08	1.44	1.44	1.44	3.60	3.21	9.00	10.16	0.60	2.11	3.03	2.74	9.66	13.89	95	4.28	A	1055	A++	7.71	9.0	409
	1.5+2.0+2.0+2.0+6.0	1.00	1.33	1.33	1.33	4.00	3.36	9.00	10.41	0.60	2.08	2.95	2.74	9.52	13.52	95	4.33	A	1040	A++	7.73	9.0	408
	1.5+2.0+2.0+2.0+7.1	0.92	1.23	1.23	1.23	4.38	3.51	9.00	10.61	0.63	2.06	3.03	2.86	9.43	13.85	95	4.38	A	1030	A++	7.76	9.0	406
	1.5+2.0+2.0+2.5+2.5	1.24	1.66	1.66	2.07	2.07	2.92	8.70	9.44	0.53	1.87	2.63	2.44	8.56	12.02	95	4.67	A	935	A++	7.86	8.7	388
	1.5+2.0+2.0+2.5+3.5	1.17	1.57	1.57	1.96	2.74	3.07	9.00	9.83	0.56	1.92	2.88	2.57	8.79	13.20	95	4.71	A	960	A++	7.90	9.0	399
	1.5+2.0+2.0+2.5+4.2	1.11	1.48	1.48	1.84	3.10	3.17	9.00	10.07	0.60	1.91	3.02	2.74	8.75	13.81	95	4.73	A	955	A++	7.90	9.0	399
	1.5+2.0+2.0+2.5+5.0	1.04	1.38	1.38	1.73	3.46	3.29	9.00	10.29	0.60	1.87	3.11	2.74	8.56	14.22	95	4.83	A	935	A++	7.93	9.0	397
	1.5+2.0+2.0+2.5+6.0	0.96	1.29	1.29	1.61	3.86	3.43	9.00	10.52	0.60	1.85	3.03	2.74	8.47	13.85	95	4.88	A	925	A++	7.95	9.0	396
	1.5+2.0+2.0+2.5+7.1	0.89	1.19	1.19	1.49	4.23	3.59	9.00	10.67	0.63	1.83	3.10	2.86	8.38	14.17	95	4.93	A	915	A++	7.97	9.0	395
	1.5+2.0+2.0+3.5+3.5	1.08	1.44	1.44	2.52	2.52	3.21	9.00	10.16	0.60	1.91	3.08	2.74	8.75	14.09	95	4.73	A	955	A++	7.91	9.0	399
	1.5+2.0+2.0+3.5+4.2	1.02	1.36	1.36	2.39	2.86	3.32	9.00	10.18	0.60	1.90	3.08	2.74	8.70	14.09	95	4.75	A	950	A++	7.91	9.0	398
	1.5+2.0+2.0+3.5+5.0	0.96	1.29	1.29	2.25	3.21	3.43	9.00	10.36	0.63	1.86	3.11	2.86	8.52	14.22	95	4.85	A	930	A++	7.94	9.0	397
	1.5+2.0+2.0+3.5+6.0	0.90	1.20	1.20	2.10	3.60	3.57	9.00	10.66	0.63	1.84	3.10	2.86	8.43	14.17	95	4.90	A	920	A++	7.96	9.0	396

Combination tables

Cooling

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	EER	Energy label	AEC (kWh)	Seasonal data			
		A room	B room	C room	D room	E room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.					Label	SEER	Pdesign	AEC
5MXM90N2V1B	1.5+2.0+2.0+4.2+4.2	0.97	1.29	1.29	2.72	2.72	3.42	9.00	10.19	0.63	1.89	3.09	2.86	8.65	14.13	95	4.77	A	945	A++	7.92	9.0	398
	1.5+2.0+2.0+4.2+5.0	0.92	1.22	1.22	2.57	3.06	3.53	9.00	10.62	0.63	1.85	3.39	2.86	8.47	15.52	95	4.87	A	925	A++	7.95	9.0	396
	1.5+2.0+2.0+5.0+5.0	0.87	1.16	1.16	2.90	2.90	3.65	9.00	10.70	0.65	1.85	3.28	2.99	8.47	14.99	95	4.87	A	925	A++	7.95	9.0	396
	1.5+2.0+2.5+2.5+2.5	1.23	1.64	2.05	2.05	2.05	2.99	9.00	9.64	0.56	1.92	2.75	2.57	8.79	12.59	95	4.71	A	960	A++	7.89	9.0	399
	1.5+2.0+2.5+2.5+3.5	1.13	1.50	1.88	1.88	2.63	3.14	9.00	10.01	0.56	1.90	3.02	2.57	8.70	13.81	95	4.75	A	950	A++	7.91	9.0	399
	1.5+2.0+2.5+2.5+4.2	1.06	1.42	1.77	1.77	2.98	3.24	9.00	10.17	0.60	1.89	3.08	2.74	8.65	14.09	95	4.77	A	945	A++	7.91	9.0	398
	1.5+2.0+2.5+2.5+5.0	1.00	1.33	1.67	1.67	3.33	3.36	9.00	10.35	0.60	1.85	3.11	2.74	8.47	14.22	95	4.87	A	925	A++	7.94	9.0	397
	1.5+2.0+2.5+2.5+6.0	0.93	1.24	1.55	1.55	3.72	3.50	9.00	10.59	0.63	1.83	3.03	2.86	8.38	13.85	95	4.92	A	915	A++	7.96	9.0	396
	1.5+2.0+2.5+2.5+7.1	0.87	1.15	1.44	1.44	4.10	3.66	9.00	10.71	0.65	1.82	3.10	2.99	8.33	14.17	95	4.97	A	910	A++	7.98	9.0	395
	1.5+2.0+2.5+3.5+3.5	1.04	1.38	1.73	2.42	2.42	3.29	9.00	10.17	0.60	1.89	3.08	2.74	8.65	14.09	95	4.77	A	945	A++	7.92	9.0	398
	1.5+2.0+2.5+3.5+4.2	0.99	1.31	1.64	2.30	2.76	3.39	9.00	10.18	0.63	1.88	3.08	2.86	8.61	14.09	95	4.79	A	940	A++	7.92	9.0	398
	1.5+2.0+2.5+3.5+5.0	0.93	1.24	1.55	2.17	3.10	3.50	9.00	10.36	0.63	1.85	3.11	2.86	8.47	14.22	95	4.89	A	925	A++	7.95	9.0	396
	1.5+2.0+2.5+3.5+6.0	0.87	1.16	1.45	2.03	3.48	3.65	9.00	10.70	0.65	1.83	3.10	2.99	8.38	14.17	95	4.94	A	915	A++	7.97	9.0	396
	1.5+2.0+2.5+4.2+4.2	0.94	1.25	1.56	2.63	2.63	3.48	9.00	10.19	0.63	1.88	3.09	2.86	8.61	14.13	95	4.81	A	940	A++	7.93	9.0	398
	1.5+2.0+2.5+4.2+5.0	0.89	1.18	1.48	2.49	2.96	3.60	9.00	10.68	0.65	1.84	3.46	2.99	8.43	15.84	95	4.91	A	920	A++	7.96	9.0	396
	1.5+2.0+3.5+3.5+3.5	0.96	1.29	2.25	2.25	2.25	3.43	9.00	10.18	0.63	1.88	3.08	2.86	8.61	14.09	95	4.79	A	940	A++	7.93	9.0	398
	1.5+2.0+3.5+3.5+4.2	0.92	1.22	2.14	2.14	2.57	3.53	9.00	10.62	0.65	1.88	3.57	2.99	8.61	16.33	95	4.81	A	940	A++	7.93	9.0	398
	1.5+2.0+3.5+3.5+5.0	0.87	1.16	2.03	2.03	2.90	3.65	9.00	10.70	0.65	1.84	3.45	2.99	8.43	15.80	95	4.91	A	920	A++	7.96	9.0	396
	1.5+2.0+3.5+4.2+4.2	0.88	1.17	2.05	2.45	2.45	3.63	9.00	10.69	0.65	1.87	3.64	2.99	8.56	16.66	95	4.83	A	935	A++	7.94	9.0	397
	1.5+2.5+2.5+2.5+2.5	1.17	1.96	1.96	1.96	1.96	3.07	9.00	9.83	0.56	1.91	2.88	2.57	8.75	13.20	95	4.73	A	955	A++	7.88	9.0	400
	1.5+2.5+2.5+2.5+3.5	1.08	1.80	1.80	1.80	2.52	3.21	9.00	10.16	0.60	1.89	3.08	2.74	8.65	14.09	95	4.77	A	945	A++	7.89	9.0	399
	1.5+2.5+2.5+2.5+4.2	1.02	1.70	1.70	1.70	2.86	3.32	9.00	10.17	0.60	1.88	3.08	2.74	8.61	14.09	95	4.79	A	940	A++	7.89	9.0	399
	1.5+2.5+2.5+2.5+5.0	0.96	1.61	1.61	1.61	3.21	3.43	9.00	10.35	0.63	1.85	3.11	2.86	8.47	14.22	95	4.89	A	925	A++	7.92	9.0	398
	1.5+2.5+2.5+2.5+6.0	0.90	1.50	1.50	1.50	3.60	3.57	9.00	10.66	0.63	1.83	3.10	2.86	8.38	14.17	95	4.94	A	915	A++	7.94	9.0	397
	1.5+2.5+2.5+3.5+3.5	1.00	1.67	1.67	2.33	2.33	3.36	9.00	10.17	0.63	1.88	3.08	2.86	8.61	14.09	95	4.79	A	940	A++	7.90	9.0	399
	1.5+2.5+2.5+3.5+4.2	0.95	1.58	1.58	2.22	2.66	3.46	9.00	10.18	0.63	1.88	3.08	2.86	8.61	14.09	95	4.81	A	940	A++	7.90	9.0	399
	1.5+2.5+2.5+3.5+5.0	0.90	1.50	1.50	2.10	3.00	3.57	9.00	10.66	0.65	1.84	3.38	2.99	8.43	15.48	95	4.91	A	920	A++	7.93	9.0	397
	1.5+2.5+2.5+4.2+4.2	0.91	1.51	1.51	2.54	2.54	3.56	9.00	10.65	0.65	1.87	3.64	2.99	8.56	16.66	95	4.83	A	935	A++	7.91	9.0	398
	1.5+2.5+3.5+3.5+3.5	0.93	1.55	2.17	2.17	2.17	3.50	9.00	10.18	0.63	1.88	3.08	2.86	8.61	14.09	95	4.81	A	940	A++	7.91	9.0	399
	1.5+2.5+3.5+3.5+4.2	0.89	1.48	2.07	2.07	2.49	3.60	9.00	10.68	0.65	1.87	3.64	2.99	8.56	16.66	95	4.83	A	935	A++	7.91	9.0	398
	1.5+3.5+3.5+3.5+3.5	0.87	2.03	2.03	2.03	2.03	3.65	9.00	10.70	0.65	1.87	3.71	2.99	8.56	16.99	95	4.83	A	935	A++	7.92	9.0	398
	2.0+2.0+2.0+2.0+2.0	1.70	1.70	1.70	1.70	1.70	2.85	8.50	9.21	0.53	1.83	2.50	2.44	8.38	11.45	95	4.67	A	915	A++	7.83	8.5	380
	2.0+2.0+2.0+2.0+2.5	1.66	1.66	1.66	1.66	2.07	2.92	8.70	9.44	0.53	2.03	2.63	2.44	9.30	12.02	95	4.30	A	1015	A++	7.72	8.7	395
	2.0+2.0+2.0+2.0+3.5	1.57	1.57	1.57	1.57	2.74	3.07	9.00	9.83	0.56	1.90	2.88	2.57	8.70	13.20	95	4.75	A	950	A++	7.86	9.0	401
	2.0+2.0+2.0+2.0+4.2	1.48	1.48	1.48	1.48	3.10	3.17	9.00	10.07	0.60	1.89	3.02	2.74	8.65	13.81	95	4.77	A	945	A++	7.86	9.0	401
	2.0+2.0+2.0+2.0+5.0	1.38	1.38	1.38	1.38	3.46	3.29	9.00	10.29	0.60	1.85	3.11	2.74	8.47	14.22	95	4.87	A	925	A++	7.89	9.0	399
	2.0+2.0+2.0+2.0+6.0	1.29	1.29	1.29	1.29	3.86	3.43	9.00	10.52	0.60	1.83	3.03	2.74	8.38	13.85	95	4.92	A	915	A++	7.91	9.0	399
	2.0+2.0+2.0+2.0+7.1	1.19	1.19	1.19	1.19	4.23	3.59	9.00	10.67	0.63	1.82	3.10	2.86	8.33	14.17	95	4.97	A	910	A++	7.93	9.0	398
	2.0+2.0+2.0+2.5+2.5	1.64	1.64	1.64	2.05	2.05	2.99	9.00	9.64	0.56	2.09	2.75	2.57	9.57	12.59	95	4.32	A	1045	A++	7.76	9.0	406
	2.0+2.0+2.0+2.5+3.5	1.50	1.50	1.50	1.88	2.63	3.14	9.00	10.01	0.56	2.07	3.02	2.57	9.48	13.81	95	4.36	A	1035	A++	7.77	9.0	405
	2.0+2.0+2.0+2.5+4.2	1.42	1.42	1.42	1.77	2.98	3.24	9.00	10.17	0.60	2.06	3.08	2.74	9.43	14.09	95	4.38	A	1030	A++	7.78	9.0	405
	2.0+2.0+2.0+2.5+5.0	1.33	1.33	1.33	1.67	3.33	3.36	9.00	10.35	0.60	2.01	3.11	2.74	9.20	14.22	95	4.48	A	1005	A++	7.81	9.0	404
	2.0+2.0+2.0+2.5+6.0	1.24	1.24	1.24	1.55	3.72	3.50	9.00	10.59	0.63	1.99	3.03	2.86	9.11	13.85	95	4.53	A	995	A++	7.83	9.0	403
	2.0+2.0+2.0+2.5+7.1	1.15	1.15	1.15	1.44	4.10	3.66	9.00	10.71	0.65	1.97	3.10	2.99	9.02	14.17	95	4.58	A	985	A++	7.85	9.0	401
	2.0+2.0+2.0+3.5+3.5	1.38	1.38	1.38	2.42	2.42	2.99	9.00	9.64	0.56	2.06	2.75	2.57	9.43	12.59	95	4.38	A	1030	A++	7.78	9.0	405
	2.0+2.0+2.0+3.5+4.2	1.31	1.31	1.31	2.30	2.76	3.39	9.00	10.18	0.63	2.05	3.08	2.86	9.39	14.09	95	4.40	A	1025	A++	7.79	9.0	405
	2.0+2.0+2.0+3.5+5.0	1.24	1.24	1.24	2.17	3.10	3.50	9.00	10.36	0.63	2.00	3.11	2.86	9.16	14.22	95	4.50	A	1000	A++	7.82	9.0	403
	2.0+2.0+2.0+3.5+6.0	1.16	1.16	1.16	2.03	3.48	3.65	9.00	10.70	0.65	1.98	3.10	2.99	9.07	14.17	95	4.55	A	990	A++	7.84	9.0	402
	2.0+2.0+2.0+4.2+4.2	1.25	1.25	1.25	2.63	2.63	3.48	9.00	10.19	0.63	2.04	3.09	2.86	9.34	14.13	95	4.42	A	1020	A++	7.80	9.0	404
	2.0+2.0+2.0+4.2+5.0	1.18	1.18	1.18	2.49	2.96	3.60	9.00	10.68	0.65	2.00	3.46	2.99	9.16	15.84	95	4.52	A	1000	A++	7.83	9.0	403
	2.0+2.0+2.5+2.5+2.5	1.57	1.57	1.96	1.96	1.96	3.07	9.00	9.83	0.56	2.08	2.88	2.57	9.52	13.20	95	4.34	A	1040	A++	7.74	9.0	407
	2.0+2.0+2.5+2.5+3.5	1.44	1.44	1.80	1.80	2.52	3.21	9.00	10.16	0.60	2.06	3.08	2.74	9.43	14.09	95	4.38	A	1030	A++	7.76	9.0	406
	2.0+2.0+2.5+2.5+4.2	1.36	1.36	1.70	1.70	2.86	3.32	9.00	9.85	0.60	2.05	3.08	2.74	9.39	14.09	95	4.40	A	1025	A++	7.76	9.0	406
	2.0+2.0+2.5+2.5+5.0	1.29	1.29	1.61	1.61	3.21	3.43	9.00	10.35	0.63	2.00	3.11	2.86	9.16	14.22	95	4.50	A	1000	A++	7.79	9.0	404
	2.0+2.0+2.5+2.5+6.0	1.20	1.20	1.50	1.50	3.60	3.57	9.00	10.66	0.63	1.98	3.10	2.86	9.07	14.17	95	4.55	A	990	A++	7.81	9.0	403
	2.0+2.0+2.5+3.5+3.5	1.33	1.33	1.67	2.33	2.33	3.36	9.00	10.17	0.63	2.05	3.08	2.86	9.39	14.09	95	4.40	A	1025	A++	7.77	9.0	406
	2.0+2.0+2.5+3.5+4.2	1.27	1.27	1.58	2.22	2.66	3.46	9.00	9.85	0.63	2.04	3.08	2.86	9.34	14.09	95	4.42	A	1020	A++	7.77	9.0	406
	2.0+2.0+2.5+3.5+5.0	1.20	1.20	1.50	2.10	3.00	3.57	9.00	10.66	0.65	2.00	3.38	2.99	9.16	15.48	95	4.52	A	1000	A++	7.80	9.0	404
	2.0+2.0+2.5+4.2+4.2	1.21	1.21	1.51	2.54	2.54	3.56	9.00	10.65	0.65	2.03	3.57	2.99	9.30	16.33	95	4.44	A	1015	A++	7.78	9.0	405
	2.0+2.0+3.5+3.5+3.5	1.24	1.24	2.17	2.17	2.17	3.50	9.00	10.18	0.63	2.04	3.08	2.86	9.34	14.09	95	4.42	A	1020	A++	7.77	9.0	405
	2.0+2.0+3.5+3.5+4.2	1.18	1.18	2.07	2.07	2.49	3.60	9.00	10.68	0.65	2.03	3.57	2.99	9.30	16.33	95	4.44	A	1015	A++	7.78	9.0	405
	2.0+2.5+2.5+2.5+2.5	1.50	1.88	1.88	1.88	1.88	3.14	9.00	10.01	0.56	2.07	3.02	2.57	9.48	13.81	95	4.36	A	1035	A++	7.75	9.0	407
	2.0+2.5+2.5+2.5+3.5	1.38	1.73	1.73	1.73	2.42	3.29	9.00	10.16	0.60	2.05	3.08	2.74	9.39	14.09	95	4.40	A	1025	A++	7.76	9.0	406
	2.0+2.5+2.5+2.5+4.2	1.31	1.64	1.64	1.64	2.76	3.39	9.00	10.17	0.63	2.04	3.08	2.86	9.34	14.09	95	4.42	A	1020	A++	7.76	9.0	406
	2.0+2.5+2.5+2.5+5.0	1.24	1.55	1.55	1.55	3.10	3.50	9.00	10.35	0.63	2.00	3.11	2.86	9.16	14.22	95	4.52	A	1000	A++	7.80	9.0	404
	2.0+2.5+2.5+2.5+6.0	1.16	1.45	1.45	1.45	3.48	3.65	9.00	10.70	0.65	1.97	3.10	2.99	9.02	14.17	95	4.57	A	985	A++	7.82	9.0	403
	2.0+2.5+2.5+3.5+3.5	1.29	1.61	1.61	2.25	2.25	3.43	9.00	10.17	0.63	2.04	3.08	2.86	9.34	14.09	95	4.42	A	1020	A++	7.77	9.0	406
	2.0+2.5+2.5+3.5+4.2	1.22	1.53	1.53	2.14	2.57	3.53	9.00	10.62	0.65	2.03	3.57	2.99	9.30	16.33	95	4.44	A	1015	A++	7.77	9.0	405
	2.0+2.5+2.5+3.5+5.0	1.16	1.45	1.45	2.03	2.90	3.65	9.00	10.70	0.65	1.97	3.45	2.99	9.02	15.80	95	4.59	A	985	A++	7.83	9.0	403
	2.0+2.5+2.5+4.2+4.2	1.17	1.46	1.46	2.45	2.45	3.60	9.00	10.68	0.65	2.03	3.57	2.99	9.30	16.33	95	4.45	A	1015	A++	7.77	9.0	406
	2.0+2.5+3.5+3.5+3.5	1.20	1.50	2.10	2.10	2.10	3.57	9.00	10.63	0.65	2.02	3.57	2.99	9.25	16.33	95	4.47	A	1010	A++	7.78	9.0	405
	2.5+2.5+2.5+2.5+2.5	1.80	1.80	1.80	1.80	1.80	3.21	9.00	10.15	0.60	2.02	3.08	2.74	9.25	14.09	95	4.47	A	1010	A++	7.73	9.0	408
	2.5+2.5+2.5+2.5+3.5	1.67	1.67	1.67	1.67	2.33	3.36	9.00	10.16	0.63	2.01	3.08	2.86	9.20	14.09	95	4.49	A	1005	A++	7.74	9.0	407
	2.5+2.5+2.5+2.5+4.2	1.58	1.58	1.58	1.58	2.66	3.46	9.00	10.17	0.63	2.01	3.08	2.86	9.20	14.09	95	4.49	A	1005	A++	7.75	9.0	407
	2.5+2.5+2.5+2.5+5.0	1.50	1.50	1.50	1.50	3.00	3.57	9.00	10.66	0.65	2.00	3.45	2.99	9.16	15.80	95	4.51	A	1000	A++	7.75	9.0	407
	2.5+2.5+2.5+3.5+3.5	1.55	1.55	1.55	2.17	2.17	3.50	9.00	10.17	0.63	2.00	3.08	2.86	9.16	14.09	95	4.51	A	1000	A++	7.76	9.0	406
	2.5+2.5+2.5+3.5+4.2	1.48	1.48	1.48	2.07	2.49	3.60	9.00	10.68	0.65	1.99	3.57	2.99	9.11	16.33	95	4.53	A	995	A++	7.76	9.0	406
	2.5+2.5+3.5+3.5+3.5	1.45	1.45	2.03	2.03	2.03	3.65	9.00	10.63	0.65	1.99	3.57	2.99	9.11	16.33	95	4.53	A	995	A++	7.77	9.0	406

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
	1.5	1.90	---	---	---	---	1.28	1.90	4.15	0.28	0.53	1.31	1.29	2.43	5.98	95	3.59	---	---	---	---	---	---
	2.0	2.49	---	---	---	---	1.33	2.49	4.37	0.34	0.67	1.37	1.55	3.05	6.25	95	3.73	---	---	---	---	---	---
	2.5	3.11	---	---	---	---	1.39	3.11	4.84	0.36	0.88	1.47	1.64	4.04	6.71	95	3.53	---	---	---	---	---	---
	3.5	4.36	---	---	---	---	1.51	4.36	5.31	0.38	1.40	1.93	1.73	6.42	8.84	95	3.11	---	---	---	---	---	---
	4.2	5.23	---	---	---	---	1.56	5.23	6.16	0.40	1.63	2.06	1.82	7.45	9.42	95	3.22	---	---	---	---	---	---
	5.0	6.21	---	---	---	---	1.94	6.21	7.75	0.47	1.76	2.39	2.13	8.08	10.92	95	3.52	---	---	---	---	---	---
	6.0	7.46	---	---	---	---	2.23	7.46	9.05	0.58	2.25	2.86	2.66	10.32	13.09	95	3.31	---	---	---	---	---	---
	7.1	8.82	---	---	---	---	2.55	8.82	9.38	0.65	2.81	3.01	2.97	12.88	13.77	95	3.14	---	---	---	---	---	---
	1.5+1.5	1.85	1.85	---	---	---	1.51	3.70	7.45	0.37	0.88	1.85	1.68	4.03	8.47	95	4.21	A	A	3.87	3.50	1264	0.32
	1.5+2.0	1.84	2.46	---	---	---	1.57	4.30	7.83	0.35	1.04	2.01	1.59	4.76	9.20	95	4.16	A	A	3.88	3.50	1262	0.32
	1.5+2.5	1.84	3.06	---	---	---	1.72	4.90	8.02	0.37	1.20	2.08	1.68	5.50	9.52	95	4.09	A	A	3.89	3.50	1259	0.32
	1.5+3.5	1.83	4.27	---	---	---	2.02	6.10	8.57	0.44	1.68	2.37	2.02	7.69	10.85	95	3.64	A	A	3.91	3.80	1360	0.44
	1.5+4.2	1.84	5.16	---	---	---	2.23	7.00	8.92	0.42	1.99	2.59	1.94	9.11	11.85	95	3.52	B	A	3.92	3.80	1357	0.43
	1.5+5.0	1.85	6.15	---	---	---	2.48	8.00	10.45	0.44	2.17	2.93	2.02	9.94	13.41	95	3.70	A	A+	4.00	4.50	1573	0.73
	1.5+6.0	1.80	7.20	---	---	---	2.77	9.00	10.65	0.48	2.47	2.72	2.19	11.31	12.45	95	3.65	A	A+	4.01	4.50	1570	0.72
	1.5+7.1	1.74	8.26	---	---	---	3.09	10.00	10.67	0.52	2.90	2.70	2.37	13.28	12.36	95	3.45	B	A+	4.02	4.50	1567	0.7
	2.0+2.0	2.45	2.45	---	---	---	1.72	4.90	8.02	0.37	1.19	2.33	1.68	5.45	10.66	95	4.13	A	A	3.86	3.50	1267	0.32
	2.0+2.5	2.44	3.06	---	---	---	1.88	5.50	8.19	0.39	1.37	2.34	1.76	6.28	10.71	95	4.03	A	A	3.87	3.50	1265	0.31
	2.0+3.5	2.44	4.26	---	---	---	2.17	6.70	8.74	0.47	1.75	2.45	2.15	8.01	11.21	95	3.85	A	A	3.92	3.80	1355	0.43
	2.0+4.2	2.45	5.15	---	---	---	2.39	7.60	9.10	0.58	2.04	2.68	2.67	9.34	12.27	95	3.74	A	A	3.93	3.80	1353	0.43
	2.0+5.0	2.43	6.07	---	---	---	2.62	8.50	10.63	0.59	2.35	3.02	2.71	10.76	13.82	95	3.63	A	A+	4.03	4.50	1564	0.73
	2.0+6.0	2.33	6.98	---	---	---	2.92	9.30	10.82	0.61	2.62	2.72	2.80	12.00	12.45	95	3.55	B	A+	4.03	4.50	1560	0.71
	2.0+7.1	2.20	7.80	---	---	---	3.23	10.00	10.92	0.65	2.90	2.93	2.97	13.28	13.41	95	3.46	B	A+	4.04	4.50	1557	0.69
	2.5+2.5	3.05	3.05	---	---	---	2.02	6.10	8.52	0.44	1.73	2.38	2.02	7.92	10.89	95	3.54	B	A	3.88	3.50	1263	0.31
	2.5+3.5	3.04	4.26	---	---	---	2.33	7.30	9.12	0.56	2.08	2.70	2.58	9.52	12.36	95	3.52	B	A	3.93	3.80	1352	0.43
	2.5+4.2	3.06	5.14	---	---	---	2.54	8.20	9.38	0.61	2.35	2.93	2.80	10.76	13.41	95	3.50	B	A	3.94	3.80	1349	0.43
	2.5+5.0	3.00	6.00	---	---	---	2.77	9.00	10.72	0.62	2.58	3.11	2.84	11.81	14.23	95	3.49	B	A+	4.05	4.50	1552	0.73
	2.5+6.0	2.82	6.78	---	---	---	3.06	9.60	10.92	0.63	2.76	2.79	2.88	12.64	12.77	95	3.48	B	A+	4.06	4.50	1549	0.71
	2.5+7.1	2.60	7.40	---	---	---	3.38	10.00	11.20	0.68	2.89	3.18	3.10	13.23	14.55	95	3.47	B	A+	4.07	4.50	1546	0.69
	3.5+3.5	4.25	4.25	---	---	---	2.62	8.50	9.57	0.61	2.54	2.90	2.80	11.63	13.27	95	3.35	C	A+	4.03	4.50	1561	0.74
	3.5+4.2	4.09	4.91	---	---	---	2.83	9.00	10.18	0.66	2.77	3.25	3.01	12.68	14.87	95	3.25	C	A+	4.04	4.50	1558	0.73
	3.5+5.0	3.91	5.59	---	---	---	3.06	9.50	10.94	0.67	2.73	3.15	3.05	12.50	14.42	95	3.48	B	A+	4.09	5.20	1777	1.04
	3.5+6.0	3.68	6.32	---	---	---	3.35	10.00	11.18	0.68	2.77	3.16	3.10	12.68	14.46	95	3.62	A	A+	4.11	5.20	1770	1.02
	3.5+7.1	3.30	6.70	---	---	---	3.66	10.00	11.21	0.72	2.73	3.01	3.31	12.50	13.78	95	3.67	A	A+	4.13	5.20	1763	1
	4.2+4.2	4.75	4.75	---	---	---	3.03	9.50	9.99	0.68	2.62	3.25	3.10	12.00	14.87	95	3.63	A	A+	4.05	4.50	1555	0.73
	4.2+5.0	4.57	5.43	---	---	---	3.26	10.00	10.95	0.69	2.78	3.21	3.14	12.73	14.69	95	3.61	A	A+	4.16	5.20	1748	1.03
	4.2+6.0	4.12	5.88	---	---	---	3.55	10.00	11.19	0.71	2.74	3.15	3.23	12.55	14.42	95	3.66	A	A+	4.18	5.20	1741	1.01
	4.2+7.1	3.72	6.28	---	---	---	3.87	10.00	11.21	0.74	2.69	3.07	3.40	12.32	14.05	95	3.72	A	A+	4.19	5.20	1734	1
	5.0+5.0	5.00	5.00	---	---	---	3.49	10.00	11.12	0.71	2.71	3.13	3.27	12.41	14.32	95	3.70	A	A+	4.05	6.46	2229	1.59
5MXM90N2V1B	5.0+6.0	4.55	5.45	---	---	---	3.77	10.00	11.32	0.71	2.67	3.05	3.23	12.22	13.96	95	3.75	A	A+	4.07	6.46	2220	1.57
	5.0+7.1	4.13	5.87	---	---	---	4.09	10.00	11.35	0.78	2.63	2.83	3.57	12.04	12.95	95	3.80	A	A+	4.09	6.46	2211	1.55
	6.0+6.0	5.00	5.00	---	---	---	4.07	10.00	11.14	0.71	2.65	2.80	3.27	12.13	12.81	95	3.79	A	A+	4.08	6.46	2215	1.57
	6.0+7.1	4.58	5.42	---	---	---	4.39	10.00	11.17	0.79	2.62	2.79	3.61	12.00	12.77	95	3.82	A	A+	4.10	6.46	2206	1.55
	7.1+7.1	5.00	5.00	---	---	---	4.70	10.00	11.20	0.84	2.60	2.78	3.83	11.90	12.72	95	3.86	A	A+	4.09	6.46	2207	1.54
	1.5+1.5+1.5	1.83	1.83	1.83	---	---	1.88	5.50	9.97	0.44	1.20	2.28	2.02	5.50	10.43	95	4.59	A	A+	4.00	4.80	1679	0.83
	1.5+1.5+2.0	1.83	1.83	2.44	---	---	2.02	6.10	10.15	0.46	1.38	2.36	2.11	6.32	10.80	95	4.43	A	A+	4.01	4.80	1674	0.83
	1.5+1.5+2.5	1.83	1.83	3.05	---	---	2.17	6.70	10.23	0.48	1.59	2.39	2.19	7.28	10.94	95	4.23	A	A+	4.02	4.80	1669	0.82
	1.5+1.5+3.5	1.85	1.85	4.31	---	---	2.48	8.00	10.34	0.52	2.05	2.51	2.37	9.39	11.49	95	3.91	A	A+	4.02	5.50	1914	1.12
	1.5+1.5+4.2	1.81	1.81	5.08	---	---	2.68	8.70	10.34	0.56	2.29	2.51	2.58	10.49	11.49	95	3.81	A	A+	4.03	5.50	1908	1.12
	1.5+1.5+5.0	1.74	1.74	5.81	---	---	2.92	9.30	10.51	0.56	2.48	2.61	2.58	11.36	11.95	95	3.76	A	A+	4.12	6.46	2191	1.54
	1.5+1.5+6.0	1.58	1.58	6.33	---	---	3.20	9.50	11.14	0.57	2.48	2.80	2.62	11.36	12.81	95	3.84	A	A+	4.15	6.46	2175	1.52
	1.5+1.5+7.1	1.49	1.49	7.03	---	---	3.52	10.00	11.18	0.61	2.70	2.79	2.80	12.36	12.77	95	3.71	A	A+	4.18	6.46	2159	1.5
	1.5+2.0+2.0	1.83	2.44	2.44	---	---	2.17	6.70	10.31	0.48	1.60	2.43	2.19	7.33	11.12	95	4.21	A	A+	4.01	4.80	1672	0.82
	1.5+2.0+2.5	1.83	2.43	3.04	---	---	2.33	7.30	10.41	0.50	1.77	2.46	2.28	8.11	11.26	95	4.14	A	A+	4.04	4.80	1663	0.82
	1.5+2.0+3.5	1.82	2.43	4.25	---	---	2.63	8.50	10.50	0.54	2.21	2.60	2.45	10.12	11.90	95	3.86	A	A+	4.02	5.50	1912	1.12
	1.5+2.0+4.2	1.75	2.34	4.91	---	---	2.83	9.00	10.51	0.58	2.39	2.66	2.67	10.94	12.17	95	3.77	A	A+	4.03	5.50	1906	1.11
	1.5+2.0+5.0	1.76	2.35	5.88	---	---	3.06	10.00	10.93	0.58	2.77	2.66	2.67	12.68	12.17	95	3.62	A	A+	4.13	6.46	2189	1.53
	1.5+2.0+6.0	1.58	2.11	6.32	---	---	3.35	10.00	11.14	0.60	2.71	2.80	2.75	12.41	12.81	95	3.70	A	A+	4.16	6.46	2173	1.51
	1.5+2.0+7.1	1.42	1.89	6.70	---	---	3.66	10.00	11.18	0.64	2.69	2.79	2.93	12.32	12.77	95	3.73	A	A+	4.19	6.46	2157	1.49
	1.5+2.5+2.5	1.85	3.08	3.08	---	---	2.48	8.00	10.52	0.52	2.00	2.46	2.37	9.16	11.26	95	4.01	A	A+	4.05	4.80	1657	0.82
	1.5+2.5+3.5	1.80	3.00	4.20	---	---	2.77	9.00	10.63	0.56	2.35	2.66	2.58	10.76	12.17	95	3.83	A	A+	4.05	5.50	1901	1.11
	1.5+2.5+4.2	1.83	3.05	5.12	---	---	2.97	10.00	10.63	0.60	2.74	2.66	2.75	12.55	12.17	95	3.66	A	A+	4.06	5.50	1895	1.11
	1.5+2.5+5.0	1.67	2.78	5.56	---	---	3.20	10.00	11.05	0.61	2.63	2.82	2.80	12.04	12.91	95	3.81	A	A+	4.15	6.46	2176	1.53
	1.5+2.5+6.0	1.50	2.50	6.00	---	---	3.49	10.00	11.14	0.62	2.58	2.80	2.84	11.81	12.81	95	3.89	A	A+	4.18	6.46	2160	1.51
	1.5+2.5+7.1	1.35	2.25	6.40	---	---	3.80	10.00	11.18	0.66	2.53	2.79	3.01	11.58	12.77	95	3.97	A	A+	4.21	6.46	2145	1.49
	1.5+3.5+3.5	1.76	4.12	4.12	---	---	3.06	10.00	10.64	0.60	2.74	2.66	2.75	12.55	12.17	95	3.66	A	A+	4.09	6.46	2208	1.54
	1.5+3.5+4.2	1.63	3.80	4.57	---	---	3.26	10.00	10.78	0.65	2.72	2.87	2.97	12.45	13.14	95	3.69	A	A+	4.10	6.46	2201	1.54
	1.5+3.5+5.0	1.50	3.50	5.00	---	---	3.49	10.00	10.98	0.66	2.61	2.82	3.01	11.95	12.91	95	3.84	A	A+	4.16	6.46	2169	1.52
	1.5+3.5+6.0	1.36	3.18	5.45	---	---	3.77	10.00	11.15	0.67	2.56	2.80	3.05	11.72	12.81	95	3.92	A	A+	4.20	6.46	2154	1.51
	1.5+3.5+7.1	1.24	2.89	5.87	---	---	4.09	10.00	11.18	0.73	2.51	2.79	3.36	11.49	12.77	95	4.00	A	A+	4.23	6.46	2138	1.49
	1.5+4.2+4.2	1.52	4.24	4.24	---	---	3.46	10.00	10.90	0.68	2.69	2.92	3.10	12.32	13.36	95	3.72	A	A+	4.12	6.46	2194	1.53
	1.5+4.2+5.0	1.40	3.93	4.67	---	---	3.69	10.00	11.03	0.71	2.59	2.82	3.23	11.86	12.91	95	3.87	A	A+	4.18	6.46	2162	1.52
	1.5+4.2+6.0	1.28	3.59	5.13	---	---	3.98	10.00	11.27	0.71	2.54	2.80	3.27	11.63	12.81	95	3.95	A	A+	4.21	6.46	2147	1.5
	1.5+4.2+7.1	1.17	3.28	5.55	---	---	4.29	10.00	11.30	0.76	2.49	2.78	3.48	11.40	12.72	95	4.03	A	A+	4.24	6.46	2132	1.48
	1.5+5.0+5.0	1.30	4.35	4.35	---	---	3.92	10.00	11.17	0.71	2.50	2.83	3.23	11.45	12.95	95	4.00	A	A+	4.19	6.46	2156	1.52
	1.5+5.0+6.0	1.20	4.00	4.80	---	---	4.21	10.00	11.41	0.71	2.46	2.75	3.27	11.26	12.59	95	4.08	A	A+	4.22	6.46	2140	1.5
	1.5+5.0+7.1	1.10	3.68	5.22	---	---	4.53	10.00	11.44	0.79	2.41	2.73	3.61	11.03	12.49	95	4.16	A	A+	4.25	6.46	2125	1.48
	1.5+6.0+6.0	1.11	4.44	4.44	---	---	4.50	10.00	11.65	0.72	2.42	2.67	3.31	11.08	12.22	95	4.14	A	A+	4.24	6.46	2133	1.49
	1.5+6.0+7.1	1.32	3.97	4.70	---	---	4.81	10.00	11.68	0.79	2.40	2.66	3.61	10.99	12.17	95	4.18	A	A+	4.26	6.46	2119	1.48

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
	2.0+2.0+2.0	2.50	2.50	2.50	---	---	2.33	7.50	10.49	0.50	1.77	2.50	2.28	8.11	11.44	95	4.24	A	A+	4.03	4.80	1665	0.81
	2.0+2.0+2.5	2.46	2.46	3.08	---	---	2.48	8.00	10.57	0.52	1.92	2.54	2.37	8.79	11.62	95	4.18	A	A+	4.04	4.80	1660	0.8
	2.0+2.0+3.5	2.40	2.40	4.20	---	---	2.77	9.00	10.68	0.56	2.27	2.66	2.58	10.39	12.17	95	3.98	A	A+	4.06	5.60	1931	1.15
	2.0+2.0+4.2	2.29	2.29	4.81	---	---	2.97	9.40	10.68	0.60	2.47	2.66	2.75	11.31	12.17	95	3.81	A	A+	4.07	5.60	1925	1.14
	2.0+2.0+5.0	2.22	2.22	5.56	---	---	3.20	10.00	10.90	0.61	2.76	2.82	2.80	12.64	12.91	95	3.63	A	A+	4.16	6.46	2174	1.52
	2.0+2.0+6.0	2.00	2.00	6.00	---	---	3.49	10.00	11.14	0.62	2.72	2.80	2.84	12.45	12.81	95	3.68	A	A+	4.19	6.46	2158	1.5
	2.0+2.0+7.1	1.80	1.80	6.40	---	---	3.80	10.00	11.18	0.66	2.67	2.79	3.01	12.22	12.77	95	3.75	A	A+	4.22	6.46	2142	1.48
	2.0+2.5+2.5	2.43	3.04	3.04	---	---	2.62	8.50	10.59	0.54	2.15	2.63	2.45	9.84	12.04	95	3.97	A	A+	4.07	5.00	1716	0.89
	2.0+2.5+3.5	2.33	2.91	4.07	---	---	2.92	9.30	10.68	0.58	2.45	2.66	2.67	11.22	12.17	95	3.80	A	A+	4.09	5.60	1913	1.14
	2.0+2.5+4.2	2.30	2.87	4.83	---	---	3.12	10.00	10.77	0.63	2.77	2.87	2.88	12.68	13.14	95	3.62	A	A+	4.11	5.60	1908	1.14
	2.0+2.5+5.0	2.11	2.63	5.26	---	---	3.35	10.00	11.11	0.63	2.73	2.82	2.88	12.50	12.91	95	3.67	A	A+	4.19	6.46	2154	1.51
	2.0+2.5+6.0	1.90	2.38	5.71	---	---	3.63	10.00	11.14	0.64	2.68	2.80	2.93	12.27	12.81	95	3.74	A	A+	4.22	6.46	2139	1.49
	2.0+2.5+7.1	1.72	2.16	6.12	---	---	3.95	10.00	11.18	0.69	2.66	2.79	3.14	12.18	12.77	95	3.77	A	A+	4.25	6.46	2124	1.48
	2.0+3.5+3.5	2.22	3.89	3.89	---	---	3.20	10.00	10.77	0.65	2.76	2.87	2.97	12.64	13.14	95	3.63	A	A+	4.25	6.46	2126	1.52
	2.0+3.5+4.2	2.06	3.61	4.33	---	---	3.41	10.00	10.97	0.68	2.75	2.97	3.10	12.59	13.59	95	3.64	A	A+	4.26	6.46	2120	1.52
	2.0+3.5+5.0	1.90	3.33	4.76	---	---	3.63	10.00	11.34	0.68	2.73	3.04	3.10	12.50	13.91	95	3.67	A	A+	4.32	6.46	2090	1.51
	2.0+3.5+6.0	1.74	3.04	5.22	---	---	3.92	10.00	11.34	0.69	2.68	2.80	3.14	12.27	12.81	95	3.74	A	A+	4.35	6.46	2076	1.49
	2.0+3.5+7.1	1.59	2.78	5.63	---	---	4.23	10.00	11.35	0.76	2.72	2.79	3.48	12.45	12.77	95	3.69	A	A+	4.38	6.46	2062	1.47
	2.0+4.2+4.2	1.92	4.04	4.04	---	---	3.60	10.00	10.98	0.70	2.73	2.97	3.18	12.50	13.59	95	3.67	A	A+	4.28	6.46	2113	1.52
	2.0+4.2+5.0	1.79	3.75	4.46	---	---	3.84	10.00	11.35	0.72	2.71	3.04	3.31	12.41	13.91	95	3.70	A	A+	4.34	6.46	2084	1.51
	2.0+4.2+6.0	1.64	3.44	4.92	---	---	4.12	10.00	11.37	0.73	2.60	2.80	3.36	11.90	12.81	95	3.85	A	A+	4.37	6.46	2069	1.49
	2.0+4.2+7.1	1.50	3.16	5.34	---	---	4.44	10.00	11.40	0.78	2.55	2.78	3.57	11.68	12.72	95	3.92	A	A+	4.40	6.46	2055	1.47
	2.0+5.0+5.0	1.67	4.17	4.17	---	---	4.07	10.00	11.06	0.75	2.59	2.83	3.44	11.86	12.95	95	3.87	A	A+	4.35	6.46	2077	1.5
	2.0+5.0+6.0	1.54	3.85	4.62	---	---	4.36	10.00	11.29	0.74	2.55	2.75	3.40	11.68	12.59	95	3.92	A	A+	4.38	6.46	2063	1.48
	2.0+5.0+7.1	1.42	3.55	5.04	---	---	4.67	10.00	11.33	0.81	2.53	2.73	3.70	11.58	12.49	95	3.95	A	A+	4.41	6.46	2049	1.46
	2.0+6.0+6.0	1.43	4.29	4.29	---	---	4.64	10.00	11.53	0.77	2.44	2.67	3.53	11.17	12.22	95	4.11	A	A+	4.39	6.46	2057	1.48
	2.0+6.0+7.1	1.32	3.97	4.70	---	---	4.96	10.00	11.56	0.82	2.39	2.66	3.74	10.94	12.17	95	4.20	A	A+	4.42	6.46	2043	1.46
	2.5+2.5+2.5	3.33	3.33	3.33	---	---	2.77	10.00	10.72	0.56	2.67	2.66	2.58	12.22	12.17	95	3.76	A	A+	4.09	5.00	1709	0.88
	2.5+2.5+3.5	2.94	2.94	4.12	---	---	3.06	10.00	10.92	0.63	2.63	2.74	2.88	12.04	12.54	95	3.81	A	A+	4.11	5.60	1906	1.13
	2.5+2.5+4.2	2.72	2.72	4.57	---	---	3.26	10.00	11.04	0.65	2.61	2.87	2.97	11.95	13.14	95	3.84	A	A+	4.12	5.60	1900	1.13
	2.5+2.5+5.0	2.50	2.50	5.00	---	---	3.49	10.00	11.33	0.66	2.51	3.04	3.01	11.49	13.91	95	4.00	A	A+	4.20	6.46	2152	1.5
	2.5+2.5+6.0	2.27	2.27	5.45	---	---	3.77	10.00	11.35	0.67	2.46	2.80	3.05	11.26	12.81	95	4.07	A	A+	4.23	6.46	2136	1.48
	2.5+2.5+7.1	2.07	2.07	5.87	---	---	4.09	10.00	11.37	0.73	2.41	2.79	3.36	11.03	12.77	95	4.15	A	A+	4.26	6.46	2121	1.46
	2.5+3.5+3.5	2.63	3.68	3.68	---	---	3.35	10.00	11.19	0.68	2.57	3.08	3.10	11.77	14.10	95	3.90	A	A+	4.15	6.46	2176	1.51
	2.5+3.5+4.2	2.45	3.43	4.12	---	---	3.55	10.00	11.20	0.70	2.55	3.08	3.18	11.68	14.10	95	3.93	A	A+	4.16	6.46	2170	1.51
	2.5+3.5+5.0	2.27	3.18	4.55	---	---	3.77	10.00	11.34	0.71	2.45	3.04	3.23	11.22	13.91	95	4.09	A	A+	4.22	6.46	2139	1.49
	2.5+3.5+6.0	2.08	2.92	5.00	---	---	4.07	10.00	11.35	0.71	2.40	2.80	3.27	10.99	12.81	95	4.17	A	A+	4.25	6.46	2124	1.48
	2.5+3.5+7.1	1.91	2.67	5.42	---	---	4.39	10.00	11.40	0.78	2.36	2.79	3.57	10.81	12.77	95	4.25	A	A+	4.28	6.46	2110	1.46
	2.5+4.2+4.2	2.29	3.85	3.85	---	---	3.75	10.00	11.20	0.72	2.53	3.08	3.31	11.58	14.10	95	3.96	A	A+	4.18	6.46	2163	1.5
5MXM90N2V1B	2.5+4.2+5.0	2.14	3.59	4.27	---	---	3.98	10.00	11.35	0.75	2.43	3.04	3.44	11.13	13.91	95	4.12	A	A+	4.24	6.46	2133	1.49
	2.5+4.2+6.0	1.97	3.31	4.72	---	---	4.26	10.00	11.37	0.76	2.39	2.80	3.48	10.94	12.81	95	4.20	A	A+	4.27	6.46	2118	1.47
	2.5+4.2+7.1	1.81	3.04	5.14	---	---	4.58	10.00	11.40	0.81	2.34	2.78	3.70	10.71	12.72	95	4.28	A	A+	4.30	6.46	2103	1.45
	2.5+5.0+5.0	2.00	4.00	4.00	---	---	4.21	10.00	11.06	0.78	2.41	2.83	3.57	11.03	12.95	95	4.15	A	A+	4.25	6.46	2126	1.49
	2.5+5.0+6.0	1.85	3.70	4.44	---	---	4.50	10.00	11.29	0.79	2.37	2.75	3.61	10.85	12.59	95	4.23	A	A+	4.28	6.46	2111	1.47
	2.5+5.0+7.1	1.71	3.42	4.86	---	---	4.81	10.00	11.33	0.84	2.33	2.73	3.83	10.67	12.49	95	4.31	A	A+	4.31	6.46	2097	1.45
	2.5+6.0+6.0	1.72	4.14	4.14	---	---	4.78	10.00	11.53	0.80	2.35	2.67	3.66	10.76	12.22	95	4.26	A	A+	4.29	6.46	2105	1.46
	2.5+6.0+7.1	1.60	3.85	4.55	---	---	5.10	10.00	11.56	0.85	2.31	2.66	3.87	10.58	12.17	95	4.34	A	A+	4.32	6.46	2091	1.45
	3.5+3.5+3.5	3.33	3.33	3.33	---	---	3.63	10.00	11.19	0.72	2.66	3.08	3.31	12.18	14.10	95	3.77	A	A+	4.28	6.46	2111	1.48
	3.5+3.5+4.2	3.13	3.13	3.75	---	---	3.84	10.00	11.20	0.75	2.63	3.08	3.44	12.04	14.10	95	3.80	A	A+	4.29	6.46	2105	1.48
	3.5+3.5+5.0	2.92	2.92	4.17	---	---	4.07	10.00	11.35	0.78	2.53	3.04	3.57	11.58	13.91	95	3.96	A	A+	4.35	6.46	2076	1.47
	3.5+3.5+6.0	2.69	2.69	4.62	---	---	4.36	10.00	11.38	0.79	2.48	2.80	3.61	11.36	12.81	95	4.04	A	A+	4.38	6.46	2062	1.45
	3.5+3.5+7.1	2.48	2.48	5.04	---	---	4.67	10.00	11.39	0.84	2.43	2.78	3.83	11.13	12.72	95	4.12	A	A+	4.41	6.46	2048	1.43
	3.5+4.2+4.2	2.94	3.53	3.53	---	---	4.04	10.00	11.21	0.80	2.61	3.07	3.66	11.95	14.05	95	3.84	A	A+	4.31	6.46	2098	1.48
	3.5+4.2+5.0	2.76	3.31	3.94	---	---	4.26	10.00	11.22	0.80	2.51	2.87	3.66	11.49	13.14	95	4.00	A	A+	4.37	6.46	2070	1.46
	3.5+4.2+6.0	2.55	3.07	4.38	---	---	4.55	10.00	11.25	0.82	2.46	2.79	3.74	11.26	12.77	95	4.07	A	A+	4.40	6.46	2055	1.45
	3.5+4.2+7.1	2.36	2.84	4.80	---	---	4.88	10.00	11.27	0.89	2.41	2.78	4.09	11.03	12.72	95	4.15	A	A+	4.43	6.46	2042	1.43
	3.5+5.0+5.0	2.59	3.70	3.70	---	---	4.50	10.00	11.07	0.84	2.49	2.82	3.83	11.40	12.91	95	4.03	A	A+	4.38	6.46	2063	1.46
	3.5+5.0+6.0	2.41	3.45	4.14	---	---	4.78	10.00	11.29	0.85	2.44	2.74	3.87	11.17	12.54	95	4.11	A	A+	4.41	6.46	2049	1.44
	3.5+5.0+7.1	2.24	3.21	4.55	---	---	5.10	10.00	11.34	0.89	2.39	2.73	4.09	10.94	12.49	95	4.19	A	A+	4.44	6.46	2036	1.42
	3.5+6.0+6.0	2.26	3.87	3.87	---	---	5.07	10.00	11.53	0.86	2.42	2.67	3.91	11.08	12.22	95	4.14	A	A+	4.42	6.46	2043	1.44
	4.2+4.2+4.2	3.33	3.33	3.33	---	---	4.23	10.00	11.22	0.83	2.59	3.07	3.79	11.86	14.05	95	3.87	A	A+	4.32	6.46	2091	1.47
	4.2+4.2+5.0	3.13	3.13	3.73	---	---	4.47	10.00	11.25	0.86	2.49	2.87	3.91	11.40	13.14	95	4.03	A	A+	4.38	6.46	2063	1.46
	4.2+4.2+6.0	2.92	2.92	4.17	---	---	4.75	10.00	11.27	0.86	2.44	2.79	3.96	11.17	12.77	95	4.11	A	A+	4.41	6.46	2049	1.44
	4.2+4.2+7.1	2.71	2.71	4.58	---	---	5.07	10.00	11.30	0.92	2.39	2.78	4.22	10.94	12.72	95	4.19	A	A+	4.44	6.46	2036	1.42
	4.2+5.0+5.0	2.96	3.52	3.52	---	---	4.70	10.00	11.07	0.86	2.47	2.82	3.91	11.31	12.91	95	4.06	A	A+	4.39	6.46	2057	1.46
	4.2+5.0+6.0	2.76	3.29	3.95	---	---	4.99	10.00	11.30	0.87	2.42	2.74	4.00	11.08	12.54	95	4.14	A	A+	4.42	6.46	2043	1.44
	5.0+5.0+5.0	3.33	3.33	3.33	---	---	4.93	10.00	11.20	0.89	2.45	2.78	4.09	11.22	12.72	95	4.09	A	A+	4.41	6.46	2051	1.45
	1.5+1.5+1.5+1.5	1.83	1.83	1.83	1.83	---	2.33	7.30	10.12	0.43	1.71	2.14	1.98	7.83	9.79	95	4.29	A	A+	4.01	6.46	2252	1.5
	1.5+1.5+1.5+2.0	1.85	1.85	1.85	2.46	---	2.48	8.00	10.30	0.45	1.93	2.24	2.06	8.84	10.25	95	4.15	A	A+	4.03	6.46	2242	1.49
	1.5+1.5+1.5+2.5	1.82	1.82	1.82	3.04	---	2.63	8.50	10.41	0.47	2.07	2.24	2.15	9.48	10.25	95	4.11	A	A+	4.05	6.46	2233	1.49
	1.5+1.5+1.5+3.5	1.74	1.74	1.74	4.07	---	2.92	9.30	10.60	0.51	2.32	2.53	2.32	10.62	11.58	95	4.02	A	A+	4.08	6.46	2214	1.48
	1.5+1.5+1.5+4.2	1.72	1.72	1.72	4.83	---	3.12	10.00	11.17	0.55	2.60	2.79	2.54	11.90	12.77	95	3.85	A	A+	4.08	6.46	2216	1.48
	1.5+1.5+1.5+5.0	1.58	1.58	1.58	5.26	---	3.35	10.00	11.29	0.55	2.50	2.74	2.54	11.45	12.54	95	4.01	A	A+	4.15	6.46	2179	1.47
	1.5+1.5+1.5+6.0	1.43	1.43	1.43	5.71	---	3.63	10.00	11.53	0.56	2.45	2.67	2.58	11.22	12.22	95	4.09	A	A+	4.18	6.46	2161	1.46
	1.5+1.5+1.5+7.1	1.29	1.29	1.29	6.12	---	3.95	10.00	11.56	0.62	2.40	2.65	2.84	10.99	12.13	95	4.18	A	A+	4.21	6.46	2145	1.46
	1.5+1.5+2.0+2.0	1.82	1.82	2.43	2.43	---	2.63	8.50	10.49	0.47	2.04	2.28	2.15	9.34	10.43	95	4.18	A	A+	4.13	6.46	2187	1.49
	1.5+1.5+2.0+2.5	1.80	1.80	2.40	3.00	---	2.77	9.00	10.59	0.49	2.19	2.54	2.24	10.03	11.62	95	4.12	A	A+	4.15	6.46	2178	1.49
	1.5+1.5+2.0+3.5	1.76	1.76	2.35	4.12	---	3.06	10.00	10.69	0.55	2.52	2.53	2.54	11.54	11.58	95	3.98	A	A+	4.18	6.46	2160	1.48
	1.5+1.5+2.0+4.2	1.63	1.63	2.17	4.57	---	3.26	10.00	11.17	0.57	2.50	2.79	2.62	11.45	12.77	95	4.01	A	A+	4.18	6.46	2163	1.48

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
	1.5+1.5+2.0+5.0	1.50	1.50	2.00	5.00	---	3.49	10.00	11.29	0.60	2.40	2.74	2.75	10.99	12.54	95	4.18	A	A+	4.25	6.46	2128	1.46
	1.5+1.5+2.0+6.0	1.36	1.36	1.82	5.45	---	3.77	10.00	11.53	0.58	2.35	2.67	2.67	10.76	12.22	95	4.26	A	A+	4.28	6.46	2112	1.46
	1.5+1.5+2.0+7.1	1.24	1.24	1.65	5.87	---	4.09	10.00	11.56	0.65	2.31	2.65	2.97	10.58	12.13	95	4.34	A	A+	4.31	6.46	2096	1.46
	1.5+1.5+2.5+2.5	1.88	1.88	3.13	3.13	---	2.92	10.00	10.59	0.54	2.54	2.54	2.45	11.63	11.62	95	3.95	A	A+	4.17	6.46	2168	1.48
	1.5+1.5+2.5+3.5	1.67	1.67	2.78	3.89	---	3.20	10.00	11.16	0.57	2.50	2.80	2.62	11.45	12.81	95	4.01	A	A+	4.18	6.46	2162	1.48
	1.5+1.5+2.5+4.2	1.55	1.55	2.58	4.33	---	3.41	10.00	11.17	0.59	2.48	2.79	2.71	11.36	12.77	95	4.05	A	A+	4.19	6.46	2154	1.47
	1.5+1.5+2.5+5.0	1.43	1.43	2.38	4.76	---	3.63	10.00	11.29	0.62	2.38	2.74	2.84	10.90	12.54	95	4.21	A	A+	4.26	6.46	2120	1.46
	1.5+1.5+2.5+6.0	1.30	1.30	2.17	5.22	---	3.92	10.00	11.53	0.63	2.34	2.67	2.88	10.71	12.22	95	4.29	A	A+	4.30	6.46	2104	1.46
	1.5+1.5+2.5+7.1	1.19	1.19	1.98	5.63	---	4.23	10.00	11.56	0.67	2.29	2.65	3.05	10.49	12.13	95	4.37	A	A+	4.33	6.46	2088	1.45
	1.5+1.5+3.5+3.5	1.50	1.50	3.50	3.50	---	3.49	10.00	11.17	0.62	2.48	2.79	2.84	11.36	12.77	95	4.05	A	A+	4.20	6.46	2154	1.47
	1.5+1.5+3.5+4.2	1.40	1.40	3.27	3.93	---	3.69	10.00	11.17	0.64	2.46	2.79	2.93	11.26	12.77	95	4.08	A	A+	4.21	6.46	2146	1.47
	1.5+1.5+3.5+5.0	1.30	1.30	3.04	4.35	---	3.92	10.00	11.30	0.67	2.36	2.74	3.05	10.81	12.54	95	4.24	A	A+	4.28	6.46	2112	1.46
	1.5+1.5+3.5+6.0	1.20	1.20	2.80	4.80	---	4.21	10.00	11.54	0.68	2.32	2.66	3.10	10.62	12.17	95	4.32	A	A+	4.31	6.46	2096	1.45
	1.5+1.5+3.5+7.1	1.10	1.10	2.57	5.22	---	4.53	10.00	11.58	0.74	2.28	2.65	3.40	10.44	12.13	95	4.40	A	A+	4.34	6.46	2080	1.45
	1.5+1.5+4.2+4.2	1.32	1.32	3.68	3.68	---	3.90	10.00	11.18	0.69	2.44	2.79	3.14	11.17	12.77	95	4.11	A	A+	4.23	6.46	2137	1.46
	1.5+1.5+4.2+5.0	1.23	1.23	3.44	4.10	---	4.12	10.00	11.32	0.71	2.34	2.74	3.27	10.71	12.54	95	4.27	A	A+	4.30	6.46	2103	1.45
	1.5+1.5+4.2+6.0	1.14	1.14	3.18	4.55	---	4.41	10.00	11.55	0.72	2.30	2.66	3.31	10.53	12.17	95	4.36	A	A+	4.33	6.46	2088	1.45
	1.5+1.5+4.2+7.1	1.05	1.05	2.94	4.97	---	4.72	10.00	11.59	0.76	2.26	2.65	3.48	10.35	12.13	95	4.44	A	A+	4.36	6.46	2072	1.45
	1.5+1.5+5.0+5.0	1.15	1.15	3.85	3.85	---	4.36	10.00	11.45	0.71	2.33	2.70	3.27	10.67	12.36	95	4.31	A	A+	4.31	6.46	2095	1.45
	1.5+1.5+5.0+6.0	1.07	1.07	3.57	4.29	---	4.64	10.00	11.68	0.72	2.28	2.67	3.31	10.44	12.22	95	4.39	A	A+	4.34	6.46	2080	1.45
	1.5+1.5+5.0+7.1	0.99	0.99	3.31	4.70	---	4.96	10.00	11.72	0.79	2.24	2.65	3.61	10.26	12.13	95	4.47	A	A+	4.38	6.46	2065	1.44
	1.5+1.5+6.0+6.0	1.00	1.00	4.00	4.00	---	4.93	10.00	11.92	0.75	2.27	2.59	3.44	10.39	11.85	95	4.42	A	A+	4.36	6.46	2072	1.44
	1.5+2.0+2.0+2.0	1.90	2.53	2.53	2.53	---	2.77	9.50	10.68	0.49	2.31	2.54	2.24	10.58	11.62	95	4.11	A	A+	4.15	6.46	2176	1.48
	1.5+2.0+2.0+2.5	1.88	2.50	2.50	3.13	---	2.92	10.00	10.77	0.54	2.42	2.54	2.45	11.08	11.62	95	4.15	A	A+	4.17	6.46	2167	1.48
	1.5+2.0+2.0+3.5	1.67	2.22	2.22	3.89	---	3.20	10.00	11.16	0.57	2.40	2.80	2.62	10.99	12.81	95	4.18	A	A+	4.18	6.46	2161	1.47
	1.5+2.0+2.0+4.2	1.55	2.06	2.06	4.33	---	3.41	10.00	11.17	0.59	2.38	2.79	2.71	10.90	12.77	95	4.21	A	A+	4.20	6.46	2153	1.47
	1.5+2.0+2.0+5.0	1.43	1.90	1.90	4.76	---	3.63	10.00	11.29	0.62	2.35	2.74	2.84	10.76	12.54	95	4.26	A	A+	4.26	6.46	2119	1.46
	1.5+2.0+2.0+6.0	1.30	1.74	1.74	5.22	---	3.92	10.00	11.53	0.63	2.31	2.67	2.88	10.58	12.22	95	4.34	A	A+	4.30	6.46	2103	1.45
	1.5+2.0+2.0+7.1	1.19	1.59	1.59	5.63	---	4.23	10.00	11.56	0.67	2.29	2.65	3.05	10.49	12.13	95	4.38	A	A+	4.33	6.46	2087	1.45
	1.5+2.0+2.5+2.5	1.76	2.35	2.94	2.94	---	3.06	10.00	10.77	0.55	2.51	2.54	2.54	11.49	11.62	95	3.99	A	A+	4.19	6.46	2158	1.48
	1.5+2.0+2.5+3.5	1.58	2.11	2.63	3.68	---	3.35	10.00	11.16	0.59	2.47	2.80	2.71	11.31	12.81	95	4.05	A	A+	4.20	6.46	2153	1.47
	1.5+2.0+2.5+4.2	1.47	1.96	2.45	4.12	---	3.55	10.00	11.17	0.62	2.45	2.79	2.84	11.22	12.77	95	4.09	A	A+	4.21	6.46	2145	1.46
	1.5+2.0+2.5+5.0	1.36	1.82	2.27	4.55	---	3.77	10.00	11.29	0.64	2.36	2.74	2.93	10.81	12.54	95	4.25	A	A+	4.28	6.46	2111	1.45
	1.5+2.0+2.5+6.0	1.25	1.67	2.08	5.00	---	4.07	10.00	11.53	0.65	2.31	2.67	2.97	10.58	12.22	95	4.33	A	A+	4.31	6.46	2095	1.45
	1.5+2.0+2.5+7.1	1.15	1.53	1.91	5.42	---	4.39	10.00	11.56	0.70	2.27	2.65	3.18	10.39	12.13	95	4.41	A	A+	4.35	6.46	2079	1.45
	1.5+2.0+3.5+3.5	1.43	1.90	3.33	3.33	---	3.63	10.00	11.17	0.64	2.45	2.79	2.93	11.22	12.77	95	4.09	A	A+	4.21	6.46	2144	1.46
	1.5+2.0+3.5+4.2	1.34	1.79	3.13	3.75	---	3.84	10.00	11.17	0.69	2.43	2.79	3.14	11.13	12.77	95	4.12	A	A+	4.23	6.46	2136	1.46
	1.5+2.0+3.5+5.0	1.25	1.67	2.92	4.17	---	4.07	10.00	11.30	0.69	2.34	2.74	3.14	10.71	12.54	95	4.28	A	A+	4.30	6.46	2102	1.45
	1.5+2.0+3.5+6.0	1.15	1.54	2.69	4.62	---	4.36	10.00	11.54	0.70	2.30	2.66	3.18	10.53	12.17	95	4.36	A	A+	4.33	6.46	2087	1.45
5MXM90N2V1B	1.5+2.0+3.5+7.1	1.06	1.42	2.48	5.04	---	4.67	10.00	11.58	0.76	2.25	2.65	3.48	10.30	12.13	95	4.45	A	A+	4.36	6.46	2071	1.44
	1.5+2.0+4.2+4.2	1.26	1.68	3.53	3.53	---	4.04	10.00	11.18	0.71	2.41	2.79	3.23	11.03	12.77	95	4.15	A	A+	4.25	6.46	2128	1.46
	1.5+2.0+4.2+5.0	1.18	1.57	3.31	3.94	---	4.26	10.00	11.32	0.73	2.32	2.74	3.36	10.62	12.54	95	4.31	A	A+	4.31	6.46	2094	1.45
	1.5+2.0+4.2+6.0	1.09	1.46	3.07	4.38	---	4.55	10.00	11.55	0.74	2.28	2.66	3.40	10.44	12.17	95	4.40	A	A+	4.35	6.46	2079	1.44
	1.5+2.0+4.2+7.1	1.01	1.35	2.84	4.80	---	4.88	10.00	11.59	0.79	2.24	2.65	3.61	10.26	12.13	95	4.48	A	A+	4.38	6.46	2064	1.44
	1.5+2.0+5.0+5.0	1.11	1.48	3.70	3.70	---	4.50	10.00	11.45	0.74	2.31	2.70	3.40	10.58	12.36	95	4.35	A	A+	4.33	6.46	2086	1.44
	1.5+2.0+5.0+6.0	1.03	1.38	3.45	4.14	---	4.78	10.00	11.68	0.77	2.26	2.67	3.53	10.35	12.22	95	4.43	A	A+	4.36	6.46	2071	1.44
	1.5+2.0+5.0+7.1	0.96	1.28	3.21	4.55	---	5.10	10.00	11.72	0.82	2.22	2.65	3.74	10.17	12.13	95	4.51	A	A+	4.40	6.46	2056	1.43
	1.5+2.0+6.0+6.0	0.97	1.29	3.87	3.87	---	5.07	10.00	11.92	0.78	2.25	2.59	3.57	10.30	11.85	95	4.46	A	A+	4.38	6.46	2063	1.43
	1.5+2.5+2.5+2.5	1.67	2.78	2.78	2.78	---	3.20	10.00	11.15	0.57	2.49	2.80	2.62	11.40	12.81	95	4.02	A	A+	4.19	6.46	2158	1.46
	1.5+2.5+2.5+3.5	1.50	2.50	2.50	3.50	---	3.49	10.00	11.16	0.62	2.45	2.80	2.84	11.22	12.81	95	4.09	A	A+	4.22	6.46	2143	1.45
	1.5+2.5+2.5+4.2	1.40	2.34	2.34	3.93	---	3.69	10.00	11.17	0.64	2.43	2.79	2.93	11.13	12.77	95	4.12	A	A+	4.23	6.46	2135	1.45
	1.5+2.5+2.5+5.0	1.30	2.17	2.17	4.35	---	3.92	10.00	11.29	0.67	2.34	2.74	3.05	10.71	12.54	95	4.28	A	A+	4.30	6.46	2101	1.44
	1.5+2.5+2.5+6.0	1.20	2.00	2.00	4.80	---	4.21	10.00	11.53	0.68	2.30	2.67	3.10	10.53	12.22	95	4.36	A	A+	4.33	6.46	2085	1.43
	1.5+2.5+2.5+7.1	1.10	1.84	1.84	5.22	---	4.53	10.00	11.56	0.74	2.25	2.65	3.40	10.30	12.13	95	4.45	A	A+	4.36	6.46	2070	1.43
	1.5+2.5+3.5+3.5	1.36	2.27	3.18	3.18	---	3.77	10.00	11.17	0.67	2.43	2.79	3.05	11.13	12.77	95	4.12	A	A+	4.23	6.46	2134	1.45
	1.5+2.5+3.5+4.2	1.28	2.14	2.99	3.59	---	3.98	10.00	11.17	0.71	2.41	2.79	3.27	11.03	12.77	95	4.15	A	A+	4.25	6.46	2127	1.45
	1.5+2.5+3.5+5.0	1.20	2.00	2.80	4.00	---	4.21	10.00	11.30	0.71	2.32	2.74	3.27	10.62	12.54	95	4.31	A	A+	4.32	6.46	2093	1.43
	1.5+2.5+3.5+6.0	1.11	1.85	2.59	4.44	---	4.50	10.00	11.54	0.72	2.28	2.66	3.31	10.44	12.17	95	4.40	A	A+	4.35	6.46	2078	1.43
	1.5+2.5+3.5+7.1	1.03	1.71	2.40	4.86	---	4.81	10.00	11.58	0.79	2.24	2.65	3.61	10.26	12.13	95	4.48	A	A+	4.38	6.46	2062	1.43
	1.5+2.5+4.2+4.2	1.21	2.02	3.39	3.39	---	4.18	10.00	11.18	0.73	2.40	2.79	3.36	10.99	12.77	95	4.18	A	A+	4.27	6.46	2118	1.44
	1.5+2.5+4.2+5.0	1.14	1.89	3.18	3.79	---	4.41	10.00	11.32	0.76	2.31	2.74	3.48	10.58	12.54	95	4.35	A	A+	4.33	6.46	2085	1.43
	1.5+2.5+4.2+6.0	1.06	1.76	2.96	4.23	---	4.70	10.00	11.55	0.77	2.26	2.66	3.53	10.35	12.17	95	4.43	A	A+	4.37	6.46	2070	1.43
	1.5+2.5+4.2+7.1	0.98	1.63	2.75	4.64	---	5.02	10.00	11.59	0.85	2.22	2.65	3.87	10.17	12.13	95	4.51	A	A+	4.40	6.46	2055	1.42
	1.5+2.5+5.0+5.0	1.07	1.79	3.57	3.57	---	4.18	10.00	11.46	0.73	2.29	2.79	3.36	10.49	12.77	95	4.38	A	A+	4.35	6.46	2077	1.43
	1.5+2.5+5.0+6.0	1.00	1.67	3.33	4.00	---	4.41	10.00	11.48	0.76	2.25	2.74	3.48	10.30	12.54	95	4.46	A	A+	4.38	6.46	2062	1.42
	1.5+3.5+3.5+3.5	1.25	2.92	2.92	2.92	---	4.07	10.00	11.17	0.71	2.43	2.79	3.27	11.13	12.77	95	4.12	A	A+	4.24	6.46	2132	1.42
	1.5+3.5+3.5+4.2	1.18	2.76	2.76	3.31	---	4.26	10.00	11.18	0.76	2.41	2.79	3.48	11.03	12.77	95	4.15	A	A+	4.25	6.46	2124	1.41
	1.5+3.5+3.5+5.0	1.11	2.59	2.59	3.70	---	4.50	10.00	11.32	0.79	2.32	2.74	3.61	10.62	12.54	95	4.31	A	A+	4.32	6.46	2091	1.4
	1.5+3.5+3.5+6.0	1.03	2.41	2.41	4.14	---	4.78	10.00	11.55	0.80	2.28	2.66	3.66	10.44	12.17	95	4.40	A	A+	4.35	6.46	2075	1.4
	1.5+3.5+3.5+7.1	0.96	2.24	2.24	4.55	---	5.10	10.00	11.59	0.85	2.24	2.65	3.87	10.26	12.13	95	4.48	A	A+	4.39	6.46	2060	1.39
	1.5+3.5+4.2+4.2	1.12	2.61	3.13	3.13	---	4.47	10.00	11.19	0.78	2.40	2.78	3.57	10.99	12.72	95	4.18	A	A+	4.27	6.46	2116	1.41
	1.5+3.5+4.2+5.0	1.06	2.46	2.96	3.52	---	4.70	10.00	11.33	0.81	2.31	2.74	3.70	10.58	12.54	95	4.35	A	A+	4.34	6.46	2083	1.4
	1.5+3.5+4.2+6.0	0.99	2.30	2.76	3.95	---	4.99	10.00	11.56	0.82	2.26	2.66	3.74	10.35	12.17	95	4.43	A	A+	4.37	6.46	2067	1.39
	1.5+3.5+5.0+5.0	1.00	2.33	3.33	3.33	---	4.93	10.00	11.45	0.85	2.29	2.70	3.87	10.49	12.36	95	4.38	A	A+	4.36	6.46	2075	1.39
	1.5+4.2+4.2+4.2	1.06	2.98	2.98	2.98	---	4.67	10.00	11.20	0.84	2.38	2.78	3.83	10.90	12.72	95	4.22	A	A+	4.29	6.46	2107	1.4
	1.5+4.2+4.2+5.0	1.01	2.82	2.82	3.36	---	4.90	10.00	11.34	0.86	2.29	2.73	3.96	10.49	12.49	95	4.38	A	A+	4.36	6.46	2075	1.39
	2.0+2.0+2.0+2.0	2.50	2.50	2.50	2.50	---	2.92	10.00	10.86	0.54	2.53	2.54	2.45	11.58	11.62	95	3.96	A	A+	4.17	6.46	2166	1.48
	2.0+2.0+2.0+2.5	2.35	2.35	2.35	2.94	---	3.06	10.00	10.95	0.55	2.51	2.54	2.54	11.49	11.62	95	3.99	A	A+	4.19	6.46	2157	1.47
	2.0+2.0+2.0+3.5	2.11	2.11	2.11	3.68	---	3.35	10.00	11.16	0.59	2.47	2.80	2.71	11.31	12.81	95	4.05	A	A+	4.20	6.46	2152	1.46

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
5MXM90N2V1B	2.0+2.0+2.0+4.2	1.96	1.96	1.96	4.12	---	3.55	10.00	11.17	0.62	2.45	2.79	2.84	11.22	12.77	95	4.09	A	A+	4.21	6.46	2144	1.46
	2.0+2.0+2.0+5.0	1.82	1.82	1.82	4.55	---	3.77	10.00	11.29	0.64	2.36	2.75	2.93	10.81	12.59	95	4.25	A	A+	4.28	6.46	2110	1.45
	2.0+2.0+2.0+6.0	1.67	1.67	1.67	5.00	---	4.07	10.00	11.53	0.65	2.31	2.67	2.97	10.58	12.22	95	4.33	A	A+	4.32	6.46	2094	1.45
	2.0+2.0+2.0+7.1	1.53	1.53	1.53	5.42	---	4.39	10.00	11.56	0.70	2.27	2.65	3.18	10.39	12.13	95	4.41	A	A+	4.35	6.46	2078	1.44
	2.0+2.0+2.5+2.5	2.22	2.22	2.78	2.78	---	3.20	10.00	11.15	0.57	2.49	2.80	2.62	11.40	12.81	95	4.02	A	A+	4.19	6.46	2159	1.47
	2.0+2.0+2.5+3.5	2.00	2.00	2.50	3.50	---	3.49	10.00	11.16	0.62	2.45	2.80	2.84	11.22	12.81	95	4.09	A	A+	4.22	6.46	2143	1.46
	2.0+2.0+2.5+4.2	1.87	1.87	2.34	3.93	---	3.69	10.00	11.17	0.64	2.43	2.79	2.93	11.13	12.77	95	4.12	A	A+	4.23	6.46	2135	1.46
	2.0+2.0+2.5+5.0	1.74	1.74	2.17	4.35	---	3.92	10.00	11.29	0.67	2.34	2.75	3.05	10.71	12.59	95	4.28	A	A+	4.30	6.46	2102	1.45
	2.0+2.0+2.5+6.0	1.60	1.60	2.00	4.80	---	4.21	10.00	11.53	0.68	2.30	2.67	3.10	10.53	12.22	95	4.36	A	A+	4.33	6.46	2086	1.44
	2.0+2.0+2.5+7.1	1.47	1.47	1.84	5.22	---	4.53	10.00	11.56	0.74	2.25	2.65	3.40	10.30	12.13	95	4.45	A	A+	4.36	6.46	2070	1.44
	2.0+2.0+3.5+3.5	1.82	1.82	3.18	3.18	---	3.77	10.00	11.17	0.67	2.43	2.79	3.05	11.13	12.77	95	4.12	A	A+	4.23	6.46	2135	1.46
	2.0+2.0+3.5+4.2	1.71	1.71	2.99	3.59	---	3.98	10.00	11.17	0.71	2.41	2.79	3.27	11.03	12.77	95	4.15	A	A+	4.25	6.46	2127	1.45
	2.0+2.0+3.5+5.0	1.60	1.60	2.80	4.00	---	4.21	10.00	11.30	0.71	2.32	2.74	3.27	10.62	12.54	95	4.31	A	A+	4.32	6.46	2093	1.44
	2.0+2.0+3.5+6.0	1.48	1.48	2.59	4.44	---	4.50	10.00	11.54	0.72	2.28	2.66	3.31	10.44	12.17	95	4.40	A	A+	4.35	6.46	2078	1.44
	2.0+2.0+3.5+7.1	1.37	1.37	2.40	4.86	---	4.81	10.00	11.58	0.79	2.24	2.65	3.61	10.26	12.13	95	4.48	A	A+	4.38	6.46	2063	1.43
	2.0+2.0+4.2+4.2	1.61	1.61	3.39	3.39	---	4.18	10.00	11.18	0.73	2.40	2.79	3.36	10.99	12.77	95	4.18	A	A+	4.26	6.46	2119	1.45
	2.0+2.0+4.2+5.0	1.52	1.52	3.18	3.79	---	4.41	10.00	11.32	0.76	2.31	2.74	3.48	10.58	12.54	95	4.35	A	A+	4.33	6.46	2085	1.44
	2.0+2.0+4.2+6.0	1.41	1.41	2.96	4.23	---	4.70	10.00	11.55	0.77	2.26	2.66	3.53	10.35	12.17	95	4.43	A	A+	4.37	6.46	2070	1.43
	2.0+2.0+4.2+7.1	1.31	1.31	2.75	4.64	---	5.02	10.00	11.59	0.85	2.22	2.65	3.87	10.17	12.13	95	4.51	A	A+	4.40	6.46	2055	1.43
	2.0+2.0+5.0+5.0	1.43	1.43	3.57	3.57	---	4.64	10.00	11.45	0.79	2.29	2.70	3.61	10.49	12.36	95	4.38	A	A+	4.35	6.46	2077	1.43
	2.0+2.0+5.0+6.0	1.33	1.33	3.33	4.00	---	4.93	10.00	11.68	0.80	2.25	2.67	3.66	10.30	12.22	95	4.46	A	A+	4.38	6.46	2062	1.43
	2.0+2.5+2.5+2.5	2.11	2.63	2.63	2.63	---	3.35	10.00	11.15	0.60	2.47	2.80	2.75	11.31	12.81	95	4.05	A	A+	4.20	6.46	2149	1.45
	2.0+2.5+2.5+3.5	1.90	2.38	2.38	3.33	---	3.63	10.00	11.16	0.64	2.43	2.80	2.93	11.13	12.81	95	4.12	A	A+	4.23	6.46	2134	1.45
	2.0+2.5+2.5+4.2	1.79	2.23	2.23	3.75	---	3.84	10.00	11.17	0.69	2.41	2.79	3.14	11.03	12.77	95	4.15	A	A+	4.25	6.46	2126	1.44
	2.0+2.5+2.5+5.0	1.67	2.08	2.08	4.17	---	4.07	10.00	11.29	0.69	2.32	2.75	3.14	10.62	12.59	95	4.31	A	A+	4.32	6.46	2093	1.43
	2.0+2.5+2.5+6.0	1.54	1.92	1.92	4.62	---	4.36	10.00	11.53	0.70	2.28	2.67	3.18	10.44	12.22	95	4.40	A	A+	4.35	6.46	2077	1.43
	2.0+2.5+2.5+7.1	1.42	1.77	1.77	5.04	---	4.67	10.00	11.56	0.77	2.24	2.65	3.53	10.26	12.13	95	4.48	A	A+	4.38	6.46	2062	1.42
	2.0+2.5+3.5+3.5	1.74	2.17	3.04	3.04	---	3.92	10.00	11.17	0.69	2.41	2.79	3.14	11.03	12.77	95	4.15	A	A+	4.25	6.46	2126	1.44
	2.0+2.5+3.5+4.2	1.64	2.05	2.87	3.44	---	4.12	10.00	11.17	0.73	2.40	2.79	3.36	10.99	12.77	95	4.18	A	A+	4.27	6.46	2118	1.44
	2.0+2.5+3.5+5.0	1.54	1.92	2.69	3.85	---	4.36	10.00	11.30	0.73	2.31	2.74	3.36	10.58	12.54	95	4.35	A	A+	4.33	6.46	2085	1.43
	2.0+2.5+3.5+6.0	1.43	1.79	2.50	4.29	---	4.64	10.00	11.54	0.77	2.26	2.66	3.53	10.35	12.17	95	4.43	A	A+	4.37	6.46	2070	1.42
	2.0+2.5+3.5+7.1	1.32	1.66	2.32	4.70	---	4.96	10.00	11.58	0.82	2.22	2.65	3.74	10.17	12.13	95	4.51	A	A+	4.40	6.46	2055	1.42
	2.0+2.5+4.2+4.2	1.55	1.94	3.26	3.26	---	4.32	10.00	11.18	0.76	2.38	2.79	3.48	10.90	12.77	95	4.22	A	A+	4.28	6.46	2110	1.43
	2.0+2.5+4.2+5.0	1.46	1.82	3.07	3.65	---	4.55	10.00	11.32	0.79	2.29	2.74	3.61	10.49	12.54	95	4.38	A	A+	4.35	6.46	2077	1.42
	2.0+2.5+4.2+6.0	1.36	1.70	2.86	4.08	---	4.85	10.00	11.55	0.80	2.25	2.66	3.66	10.30	12.17	95	4.46	A	A+	4.38	6.46	2062	1.42
	2.0+2.5+5.0+5.0	1.38	1.72	3.45	3.45	---	4.78	10.00	11.45	0.82	2.27	2.70	3.74	10.39	12.36	95	4.41	A	A+	4.37	6.46	2069	1.42
	2.0+2.5+5.0+6.0	1.29	1.61	3.23	3.87	---	5.07	10.00	11.68	0.83	2.23	2.67	3.79	10.21	12.22	95	4.49	A	A+	4.40	6.46	2054	1.42
	2.0+3.5+3.5+3.5	1.60	2.80	2.80	2.80	---	4.21	10.00	11.17	0.73	2.41	2.79	3.36	11.03	12.77	95	4.15	A	A+	4.26	6.46	2123	1.41
	2.0+3.5+3.5+4.2	1.52	2.65	2.65	3.18	---	4.41	10.00	11.18	0.79	2.40	2.79	3.61	10.99	12.77	95	4.18	A	A+	4.27	6.46	2115	1.4
	2.0+3.5+3.5+5.0	1.43	2.50	2.50	3.57	---	4.64	10.00	11.32	0.82	2.31	2.74	3.74	10.58	12.54	95	4.35	A	A+	4.34	6.46	2082	1.39
	2.0+3.5+3.5+6.0	1.33	2.33	2.33	4.00	---	4.93	10.00	11.55	0.82	2.26	2.66	3.74	10.35	12.17	95	4.43	A	A+	4.37	6.46	2067	1.39
	2.0+3.5+4.2+4.2	1.44	2.52	3.02	3.02	---	4.61	10.00	11.19	0.84	2.38	2.78	3.83	10.90	12.72	95	4.22	A	A+	4.29	6.46	2107	1.4
	2.0+3.5+4.2+5.0	1.36	2.38	2.86	3.40	---	4.85	10.00	11.33	0.84	2.29	2.74	3.83	10.49	12.54	95	4.38	A	A+	4.36	6.46	2075	1.39
	2.0+3.5+5.0+5.0	1.29	2.26	3.23	3.23	---	5.07	10.00	11.45	0.86	2.29	2.70	3.96	10.49	12.36	95	4.38	A	A+	4.36	6.46	2075	1.39
	2.0+4.2+4.2+4.2	1.37	2.88	2.88	2.88	---	4.81	10.00	11.20	0.86	2.36	2.78	3.96	10.81	12.72	95	4.25	A	A+	4.30	6.46	2099	1.4
	2.0+4.2+4.2+5.0	1.30	2.73	2.73	3.25	---	5.04	10.00	11.34	0.89	2.27	2.73	4.09	10.39	12.49	95	4.41	A	A+	4.37	6.46	2067	1.39
	2.5+2.5+2.5+2.5	2.50	2.50	2.50	2.50	---	3.49	10.00	11.15	0.62	2.45	2.80	2.84	11.22	12.81	95	4.09	A	A+	4.22	6.46	2141	1.45
	2.5+2.5+2.5+3.5	2.27	2.27	2.27	3.18	---	3.77	10.00	11.16	0.67	2.41	2.80	3.05	11.03	12.81	95	4.15	A	A+	4.25	6.46	2125	1.44
	2.5+2.5+2.5+4.2	2.14	2.14	2.14	3.59	---	3.98	10.00	11.17	0.71	2.40	2.79	3.27	10.99	12.77	95	4.18	A	A+	4.27	6.46	2118	1.43
	2.5+2.5+2.5+5.0	2.00	2.00	2.00	4.00	---	4.21	10.00	11.29	0.71	2.31	2.75	3.27	10.58	12.59	95	4.35	A	A+	4.33	6.46	2085	1.42
	2.5+2.5+2.5+6.0	1.85	1.85	1.85	4.44	---	4.50	10.00	11.53	0.72	2.26	2.67	3.31	10.35	12.22	95	4.43	A	A+	4.37	6.46	2069	1.42
	2.5+2.5+2.5+7.1	1.71	1.71	1.71	4.86	---	4.81	10.00	11.56	0.79	2.22	2.65	3.61	10.17	12.13	95	4.51	A	A+	4.40	6.46	2054	1.42
	2.5+2.5+3.5+3.5	2.08	2.08	2.92	2.92	---	4.07	10.00	11.17	0.71	2.40	2.79	3.27	10.99	12.77	95	4.18	A	A+	4.27	6.46	2117	1.43
	2.5+2.5+3.5+4.2	1.97	1.97	2.76	3.31	---	4.26	10.00	11.17	0.76	2.38	2.79	3.48	10.90	12.77	95	4.22	A	A+	4.28	6.46	2109	1.43
	2.5+2.5+3.5+5.0	1.85	1.85	2.59	3.70	---	4.50	10.00	11.30	0.79	2.29	2.74	3.61	10.49	12.54	95	4.38	A	A+	4.35	6.46	2077	1.42
	2.5+2.5+3.5+6.0	1.72	1.72	2.41	4.14	---	4.78	10.00	11.54	0.80	2.25	2.66	3.66	10.30	12.17	95	4.46	A	A+	4.38	6.46	2062	1.42
	2.5+2.5+3.5+7.1	1.60	1.60	2.24	4.55	---	5.10	10.00	11.58	0.85	2.21	2.65	3.87	10.12	12.13	95	4.54	A	A+	4.41	6.46	2047	1.41
	2.5+2.5+4.2+4.2	1.87	1.87	3.13	3.13	---	4.47	10.00	11.18	0.79	2.36	2.79	3.61	10.81	12.77	95	4.25	A	A+	4.30	6.46	2101	1.43
	2.5+2.5+4.2+5.0	1.76	1.76	2.96	3.52	---	4.70	10.00	11.32	0.82	2.27	2.74	3.74	10.39	12.54	95	4.41	A	A+	4.37	6.46	2069	1.42
	2.5+2.5+4.2+6.0	1.64	1.64	2.76	3.95	---	4.99	10.00	11.55	0.82	2.23	2.66	3.74	10.21	12.17	95	4.49	A	A+	4.40	6.46	2054	1.41
	2.5+2.5+5.0+5.0	1.67	1.67	3.33	3.33	---	4.93	10.00	11.45	0.85	2.25	2.70	3.87	10.30	12.36	95	4.45	A	A+	4.38	6.46	2061	1.41
	2.5+3.5+3.5+3.5	1.92	2.69	2.69	2.69	---	4.36	10.00	11.17	0.79	2.40	2.79	3.61	10.99	12.77	95	4.18	A	A+	4.27	6.46	2114	1.4
	2.5+3.5+3.5+4.2	1.82	2.55	2.55	3.07	---	4.55	10.00	11.18	0.81	2.38	2.79	3.70	10.90	12.77	95	4.22	A	A+	4.29	6.46	2107	1.4
	2.5+3.5+3.5+5.0	1.72	2.41	2.41	3.45	---	4.78	10.00	11.32	0.84	2.29	2.74	3.83	10.49	12.54	95	4.38	A	A+	4.36	6.46	2074	1.39
	2.5+3.5+3.5+6.0	1.61	2.26	2.26	3.87	---	5.07	10.00	11.55	0.85	2.25	2.66	3.87	10.30	12.17	95	4.46	A	A+	4.39	6.46	2059	1.38
	2.5+3.5+4.2+4.2	1.74	2.43	2.92	2.92	---	4.75	10.00	11.19	0.86	2.36	2.78	3.96	10.81	12.72	95	4.25	A	A+	4.31	6.46	2099	1.39
	2.5+3.5+4.2+5.0	1.64	2.30	2.76	3.29	---	4.99	10.00	11.33	0.86	2.27	2.74	3.96	10.39	12.54	95	4.41	A	A+	4.37	6.46	2066	1.38
	2.5+4.2+4.2+4.2	1.66	2.78	2.78	2.78	---	4.96	10.00	11.20	0.89	2.34	2.78	4.09	10.71	12.72	95	4.28	A	A+	4.32	6.46	2091	1.39
	3.5+3.5+3.5+3.5	2.50	2.50	2.50	2.50	---	4.64	10.00	11.18	0.84	2.33	2.79	3.83	10.67	12.77	95	4.30	A	A+	4.33	6.46	2085	1.4
	3.5+3.5+3.5+4.2	2.38	2.38	2.38	2.86	---	4.85	10.00	11.19	0.86	2.31	2.78	3.96	10.58	12.72	95	4.33	A	A+	4.35	6.46	2077	1.39
	3.5+3.5+3.5+5.0	2.26	2.26	2.26	3.23	---	5.07	10.00	11.33	0.89	2.23	2.74	4.09	10.21	12.54	95	4.49	A	A+	4.42	6.46	2046	1.38
	3.5+3.5+4.2+4.2	2.27	2.27	2.73	2.73	---	5.04	10.00	11.20	0.92	2.30	2.78	4.22	10.53	12.72	95	4.36	A	A+	4.37	6.46	2069	1.39
	1.5+1.5+1.5+1.5+1.5	2.00	2.00	2.00	2.00	2.00	2.77	10.00	10.90	0.42	2.14	2.47	1.94	9.80	11.30	95	4.68	A	A+	4.25	6.46	2127	1.25
	1.5+1.5+1.5+1.5+2.0	1.88	1.88	1.88	1.88	2.50	2.92	10.00	10.90	0.44	2.13	2.47	2.02	9.75	11.30	95	4.72	A	A+	4.26	6.46	2119	1.24
	1.5+1.5+1.5+1.5+2.5	1.76	1.76	1.76	1.76	2.94	3.06	10.00	10.90	0.48	2.11	2.47	2.19	9.66	11.30	95	4.75	A	A+	4.28	6.46	2111	1.24
	1.5+1.5+1.5+1.5+3.5	1.58	1.58	1.58	1.58	3.68	3.35	10.00	11.55	0.52	2.08	2.66	2.37	9.52	12.17	95	4.81	A	A+	4.31	6.46	2096	1.23
	1.5+1.5+1.5+1.5+4.2	1.47	1.47	1.47	1.47	4.12	3.55	10.00	11.55	0.55	2.07	2.66	2.54	9.48	12.17	95	4.84	A	A+	4.33	6.46	2088	1.23
	1.5+1.5+1.5+1.5+5.0	1.36	1.36	1.36	1.36	4.55	3.77	10.00	11.69	0.56	2.00	2.67	2.58	9.16	12.22	95	5.00	A	A+	4.40	6.46	2055	1.22

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
	1.5+1.5+1.5+1.5+6.0	1.25	1.25	1.25	1.25	5.00	4.07	10.00	11.93	0.56	1.99	2.59	2.58	9.11	11.85	95	5.04	A	A+	4.42	6.46	2043	1.21
	1.5+1.5+1.5+1.5+7.1	1.15	1.15	1.15	1.15	5.42	4.39	10.00	11.96	0.62	1.96	2.57	2.84	8.98	11.76	95	5.12	A	A+	4.43	6.46	2039	1.21
	1.5+1.5+1.5+2.0+2.0	1.76	1.76	1.76	2.35	2.35	3.06	10.00	10.90	0.48	2.11	2.47	2.19	9.66	11.30	95	4.75	A	A+	4.28	6.46	2110	1.24
	1.5+1.5+1.5+2.0+2.5	1.67	1.67	1.67	2.22	2.78	3.20	10.00	11.54	0.50	2.10	2.66	2.28	9.62	12.17	95	4.78	A	A+	4.30	6.46	2102	1.24
	1.5+1.5+1.5+2.0+3.5	1.50	1.50	1.50	2.00	3.50	3.49	10.00	11.55	0.54	2.07	2.66	2.45	9.48	12.17	95	4.84	A	A+	4.33	6.46	2087	1.23
	1.5+1.5+1.5+2.0+4.2	1.40	1.40	1.40	1.87	3.93	3.69	10.00	11.55	0.58	2.06	2.66	2.67	9.43	12.17	95	4.88	A	A+	4.35	6.46	2079	1.22
	1.5+1.5+1.5+2.0+5.0	1.30	1.30	1.30	1.74	4.35	3.92	10.00	11.69	0.58	1.99	2.67	2.67	9.11	12.22	95	5.04	A	A+	4.42	6.46	2046	1.21
	1.5+1.5+1.5+2.0+6.0	1.20	1.20	1.20	1.60	4.80	4.21	10.00	11.93	0.61	1.96	2.59	2.80	8.98	11.85	95	5.12	A	A+	4.45	6.46	2031	1.21
	1.5+1.5+1.5+2.0+7.1	1.10	1.10	1.10	1.47	5.22	4.53	10.00	11.96	0.65	1.93	2.57	2.97	8.84	11.76	95	5.20	A	A+	4.48	6.46	2018	1.21
	1.5+1.5+1.5+2.5+2.5	1.58	1.58	1.58	2.63	2.63	3.35	10.00	11.54	0.52	2.08	2.66	2.37	9.52	12.17	95	4.81	A	A+	4.32	6.46	2094	1.23
	1.5+1.5+1.5+2.5+3.5	1.43	1.43	1.43	2.38	3.33	3.63	10.00	11.55	0.56	2.06	2.66	2.58	9.43	12.17	95	4.88	A	A+	4.35	6.46	2078	1.22
	1.5+1.5+1.5+2.5+4.2	1.34	1.34	1.34	2.23	3.75	3.84	10.00	11.55	0.60	2.04	2.66	2.75	9.34	12.17	95	4.91	A	A+	4.36	6.46	2071	1.22
	1.5+1.5+1.5+2.5+5.0	1.25	1.25	1.25	2.08	4.17	4.07	10.00	11.69	0.62	1.98	2.67	2.84	9.07	12.22	95	5.07	A	A+	4.43	6.46	2038	1.21
	1.5+1.5+1.5+2.5+6.0	1.15	1.15	1.15	1.92	4.62	4.36	10.00	11.93	0.63	1.95	2.59	2.88	8.93	11.85	95	5.15	A	A+	4.44	6.46	2034	1.21
	1.5+1.5+1.5+2.5+7.1	1.06	1.06	1.06	1.77	5.04	4.67	10.00	11.96	0.67	1.92	2.57	3.05	8.79	11.76	95	5.23	A	A+	4.47	6.46	2022	1.2
	1.5+1.5+1.5+3.5+3.5	1.30	1.30	1.30	3.04	3.04	3.92	10.00	11.55	0.62	2.04	2.66	2.84	9.34	12.17	95	4.91	A	A+	4.37	6.46	2070	1.22
	1.5+1.5+1.5+3.5+4.2	1.23	1.23	1.23	2.87	3.44	4.12	10.00	11.56	0.65	2.03	2.66	2.97	9.30	12.17	95	4.94	A	A+	4.38	6.46	2062	1.22
	1.5+1.5+1.5+3.5+5.0	1.15	1.15	1.15	2.69	3.85	4.36	10.00	11.70	0.67	1.97	2.66	3.05	9.02	12.17	95	5.10	A	A+	4.45	6.46	2030	1.21
	1.5+1.5+1.5+3.5+6.0	1.07	1.07	1.07	2.50	4.29	4.64	10.00	11.94	0.68	1.94	2.58	3.10	8.88	11.81	95	5.18	A	A+	4.46	6.46	2027	1.2
	1.5+1.5+1.5+3.5+7.1	0.99	0.99	0.99	2.32	4.70	4.96	10.00	11.97	0.74	1.91	2.57	3.40	8.75	11.76	95	5.26	A	A+	4.48	6.46	2015	1.2
	1.5+1.5+1.5+4.2+4.2	1.16	1.16	1.16	3.26	3.26	4.32	10.00	11.58	0.69	2.02	2.65	3.14	9.25	12.13	95	4.97	A	A+	4.40	6.46	2054	1.21
	1.5+1.5+1.5+4.2+5.0	1.09	1.09	1.09	3.07	3.65	4.55	10.00	11.71	0.71	1.97	2.66	3.27	9.02	12.17	95	5.08	A	A+	4.44	6.46	2037	1.2
	1.5+1.5+1.5+4.2+6.0	1.02	1.02	1.02	2.86	4.08	4.85	10.00	11.95	0.72	1.91	2.58	3.31	8.75	11.81	95	5.26	A	A+	4.49	6.46	2013	1.2
	1.5+1.5+1.5+5.0+5.0	1.03	1.03	1.03	3.45	3.45	4.78	10.00	11.84	0.71	1.90	2.61	3.27	8.70	11.95	95	5.28	A	A+	4.52	6.46	2000	1.2
	1.5+1.5+1.5+5.0+6.0	0.97	0.97	0.97	3.23	3.87	5.07	10.00	12.07	0.74	1.87	2.53	3.40	8.56	11.58	95	5.36	A	A+	4.55	6.46	1987	1.19
	1.5+1.5+2.0+2.0+2.0	1.67	1.67	2.22	2.22	2.22	3.20	10.00	11.54	0.50	2.10	2.66	2.28	9.62	12.17	95	4.78	A	A+	4.30	6.46	2103	1.24
	1.5+1.5+2.0+2.0+2.5	1.58	1.58	2.11	2.11	2.63	3.35	10.00	11.54	0.52	2.09	2.66	2.37	9.57	12.17	95	4.79	A	A+	4.31	6.46	2095	1.24
	1.5+1.5+2.0+2.0+3.5	1.43	1.43	1.90	1.90	3.33	3.63	10.00	11.55	0.56	2.09	2.66	2.58	9.57	12.17	95	4.81	A	A+	4.34	6.46	2080	1.23
	1.5+1.5+2.0+2.0+4.2	1.34	1.34	1.79	1.79	3.75	3.84	10.00	11.55	0.60	2.08	2.66	2.75	9.52	12.17	95	4.82	A	A+	4.36	6.46	2073	1.23
	1.5+1.5+2.0+2.0+5.0	1.25	1.25	1.67	1.67	4.17	4.07	10.00	11.69	0.62	2.07	2.67	2.84	9.48	12.22	95	4.84	A	A+	4.43	6.46	2040	1.22
	1.5+1.5+2.0+2.0+6.0	1.15	1.15	1.54	1.54	4.62	4.36	10.00	11.93	0.63	2.07	2.59	2.88	9.48	11.85	95	4.85	A	A+	4.44	6.46	2037	1.21
	1.5+1.5+2.0+2.0+7.1	1.06	1.06	1.42	1.42	5.04	4.67	10.00	11.96	0.67	2.06	2.57	3.05	9.43	11.76	95	4.86	A	A+	4.46	6.46	2025	1.21
	1.5+1.5+2.0+2.5+2.5	1.50	1.50	2.00	2.50	2.50	3.49	10.00	11.54	0.55	2.09	2.66	2.50	9.57	12.17	95	4.80	A	A+	4.33	6.46	2087	1.24
	1.5+1.5+2.0+2.5+3.5	1.36	1.36	1.82	2.27	3.18	3.77	10.00	11.55	0.58	2.08	2.66	2.67	9.52	12.17	95	4.82	A	A+	4.36	6.46	2072	1.23
	1.5+1.5+2.0+2.5+4.2	1.28	1.28	1.71	2.14	3.59	3.98	10.00	11.55	0.62	2.08	2.66	2.84	9.52	12.17	95	4.83	A	A+	4.38	6.46	2064	1.22
	1.5+1.5+2.0+2.5+5.0	1.20	1.20	1.60	2.00	4.00	4.21	10.00	11.69	0.65	2.07	2.67	2.97	9.48	12.22	95	4.85	A	A+	4.45	6.46	2032	1.21
	1.5+1.5+2.0+2.5+6.0	1.11	1.11	1.48	1.85	4.44	4.50	10.00	11.93	0.65	2.03	2.59	2.97	9.30	11.85	95	4.95	A	A+	4.47	6.46	2022	1.21
	1.5+1.5+2.0+2.5+7.1	1.03	1.03	1.37	1.71	4.86	4.81	10.00	11.96	0.71	2.02	2.57	3.27	9.25	11.76	95	4.95	A	A+	4.50	6.46	2010	1.21
	1.5+1.5+2.0+3.5+3.5	1.25	1.25	1.67	2.92	2.92	4.07	10.00	11.55	0.65	2.08	2.66	2.97	9.52	12.17	95	4.83	A	A+	4.38	6.46	2064	1.22
	1.5+1.5+2.0+3.5+4.2	1.18	1.18	1.57	2.76	3.31	4.26	10.00	11.56	0.67	2.07	2.66	3.05	9.48	12.17	95	4.84	A	A+	4.39	6.46	2056	1.22
5MXM90N2V1B	1.5+1.5+2.0+3.5+5.0	1.11	1.11	1.48	2.59	3.70	4.50	10.00	11.70	0.70	2.06	2.66	3.18	9.43	12.17	95	4.86	A	A+	4.46	6.46	2024	1.21
	1.5+1.5+2.0+3.5+6.0	1.03	1.03	1.38	2.41	4.14	4.78	10.00	11.94	0.70	2.02	2.58	3.18	9.25	11.81	95	4.95	A	A+	4.49	6.46	2015	1.21
	1.5+1.5+2.0+3.5+7.1	0.96	0.96	1.28	2.24	4.55	5.10	10.00	11.97	0.76	1.99	2.57	3.48	9.11	11.76	95	5.05	A	A+	4.53	6.46	1995	1.2
	1.5+1.5+2.0+4.2+4.2	1.12	1.12	1.49	3.13	3.13	4.47	10.00	11.58	0.71	2.07	2.65	3.27	9.48	12.13	95	4.84	A	A+	4.41	6.46	2048	1.22
	1.5+1.5+2.0+4.2+5.0	1.06	1.06	1.41	2.96	3.52	4.70	10.00	11.71	0.74	2.06	2.66	3.40	9.43	12.17	95	4.87	A	A+	4.45	6.46	2028	1.21
	1.5+1.5+2.0+4.2+6.0	0.99	0.99	1.32	2.76	3.95	4.99	10.00	11.95	0.74	2.05	2.58	3.40	9.39	11.81	95	4.88	A	A+	4.48	6.46	2016	1.2
	1.5+1.5+2.0+5.0+5.0	1.00	1.00	1.33	3.33	3.33	4.93	10.00	11.84	0.77	2.00	2.61	3.53	9.16	11.95	95	5.02	A	A++	4.60	6.46	1966	1.18
	1.5+1.5+2.5+2.5+2.5	1.43	1.43	2.38	2.38	2.38	3.63	10.00	11.54	0.56	2.08	2.66	2.58	9.52	12.17	95	4.82	A	A+	4.36	6.46	2071	1.23
	1.5+1.5+2.5+2.5+3.5	1.30	1.30	2.17	2.17	3.04	3.92	10.00	11.55	0.63	2.07	2.66	2.88	9.48	12.17	95	4.84	A	A+	4.39	6.46	2057	1.22
	1.5+1.5+2.5+2.5+4.2	1.23	1.23	2.05	2.05	3.44	4.12	10.00	11.55	0.65	2.07	2.66	2.97	9.48	12.17	95	4.84	A	A+	4.41	6.46	2049	1.22
	1.5+1.5+2.5+2.5+5.0	1.15	1.15	1.92	1.92	3.85	4.36	10.00	11.69	0.67	2.06	2.67	3.05	9.43	12.22	95	4.87	A	A+	4.45	6.46	2030	1.21
	1.5+1.5+2.5+2.5+6.0	1.07	1.07	1.79	1.79	4.29	4.64	10.00	11.93	0.68	2.05	2.59	3.10	9.39	11.85	95	4.88	A	A+	4.48	6.46	2018	1.2
	1.5+1.5+2.5+2.5+7.1	0.99	0.99	1.66	1.66	4.70	4.96	10.00	11.96	0.74	2.05	2.57	3.40	9.39	11.76	95	4.89	A	A+	4.51	6.46	2006	1.2
	1.5+1.5+2.5+3.5+3.5	1.20	1.20	2.00	2.80	2.80	4.21	10.00	11.55	0.67	2.07	2.66	3.05	9.48	12.17	95	4.84	A	A+	4.41	6.46	2048	1.22
	1.5+1.5+2.5+3.5+4.2	1.14	1.14	1.89	2.65	3.18	4.41	10.00	11.56	0.71	2.07	2.66	3.27	9.48	12.17	95	4.85	A	A+	4.43	6.46	2041	1.21
	1.5+1.5+2.5+3.5+5.0	1.07	1.07	1.79	2.50	3.57	4.64	10.00	11.70	0.71	2.05	2.66	3.27	9.39	12.17	95	4.88	A	A+	4.47	6.46	2023	1.2
	1.5+1.5+2.5+3.5+6.0	1.00	1.00	1.67	2.33	4.00	4.93	10.00	11.94	0.74	2.05	2.58	3.40	9.39	11.81	95	4.89	A	A+	4.49	6.46	2011	1.2
	1.5+1.5+2.5+4.2+4.2	1.08	1.08	1.80	3.02	3.02	4.61	10.00	11.58	0.74	2.06	2.65	3.40	9.43	12.13	95	4.86	A	A+	4.44	6.46	2033	1.21
	1.5+1.5+2.5+4.2+5.0	1.02	1.02	1.70	2.86	3.40	4.85	10.00	11.71	0.77	2.05	2.66	3.53	9.39	12.17	95	4.89	A	A+	4.48	6.46	2016	1.2
	1.5+1.5+2.5+5.0+5.0	0.97	0.97	1.61	3.23	3.23	5.07	10.00	11.84	0.79	2.00	2.61	3.61	9.16	11.95	95	5.00	A	A++	4.60	6.46	1964	1.2
	1.5+1.5+3.5+3.5+3.5	1.11	1.11	2.59	2.59	2.59	4.50	10.00	11.56	0.71	2.05	2.66	3.27	9.39	12.17	95	4.90	A	A+	4.48	6.46	2018	1.21
	1.5+1.5+3.5+3.5+4.2	1.06	1.06	2.46	2.46	2.96	4.70	10.00	11.58	0.76	2.04	2.65	3.48	9.34	12.13	95	4.91	A	A+	4.49	6.46	2011	1.21
	1.5+1.5+3.5+3.5+5.0	1.00	1.00	2.33	2.33	3.33	4.93	10.00	11.71	0.79	2.03	2.66	3.61	9.30	12.17	95	4.94	A	A+	4.53	6.46	1994	1.2
	1.5+1.5+3.5+4.2+4.2	1.01	1.01	2.35	2.82	2.82	4.90	10.00	11.59	0.82	2.04	2.65	3.74	9.34	12.13	95	4.92	A	A+	4.51	6.46	2003	1.21
	1.5+2.0+2.0+2.0+2.0	1.58	2.11	2.11	2.11	2.11	3.35	10.00	11.54	0.52	2.07	2.66	2.37	9.48	12.17	95	4.84	A	A+	4.40	6.46	2056	1.22
	1.5+2.0+2.0+2.0+2.5	1.50	2.00	2.00	2.00	2.50	3.49	10.00	11.54	0.55	2.07	2.66	2.50	9.48	12.17	95	4.84	A	A+	4.41	6.46	2048	1.22
	1.5+2.0+2.0+2.0+3.5	1.36	1.82	1.82	1.82	3.18	3.77	10.00	11.55	0.58	2.06	2.66	2.67	9.43	12.17	95	4.86	A	A+	4.44	6.46	2034	1.21
	1.5+2.0+2.0+2.0+4.2	1.28	1.71	1.71	1.71	3.59	3.98	10.00	11.55	0.62	2.06	2.66	2.84	9.43	12.17	95	4.87	A	A+	4.46	6.46	2027	1.21
	1.5+2.0+2.0+2.0+5.0	1.20	1.60	1.60	1.60	4.00	4.21	10.00	11.69	0.65	2.05	2.67	2.97	9.39	12.22	95	4.90	A	A+	4.49	6.46	2011	1.19
	1.5+2.0+2.0+2.0+6.0	1.11	1.48	1.48	1.48	4.44	4.50	10.00	11.70	0.65	2.04	2.65	2.97	9.34	12.13	95	4.91	A	A+	4.52	6.46	1999	1.19
	1.5+2.0+2.0+2.0+7.1	1.03	1.37	1.37	1.37	4.86	4.81	10.00	11.96	0.71	2.00	2.66	3.27	9.16	12.17	95	5.00	A	A++	4.60	6.46	1964	1.17
	1.5+2.0+2.0+2.5+2.5	1.43	1.90	1.90	2.38	2.38	3.63	10.00	11.54	0.56	2.07	2.61	2.58	9.48	11.95	95	4.85	A	A+	4.43	6.46	2040	1.21
	1.5+2.0+2.0+2.5+3.5	1.30	1.74	1.74	2.17	3.04	3.92	10.00	11.55	0.63	2.06	2.66	2.88	9.43	12.17	95	4.87	A	A+	4.46	6.46	2026	1.21
	1.5+2.0+2.0+2.5+4.2	1.23	1.64	1.64	2.05	3.44	4.12	10.00	11.55	0.65	2.05	2.65	2.97	9.39	12.13	95	4.88	A	A+	4.48	6.46	2019	1.2
	1.5+2.0+2.0+2.5+5.0	1.15	1.54	1.54	1.92	3.85	4.36	10.00	11.69	0.67	2.04	2.66	3.05	9.34	12.17	95	4.91	A	A+	4.51	6.46	2005	1.19
	1.5+2.0+2.0+2.5+6.0	1.07	1.43	1.43	1.79	4.29	4.64	10.00	11.72	0.68	2.04	2.65	3.10	9.34	12.13	95	4.92	A	A+	4.53	6.46	1993	1.19
	1.5+2.0+2.0+2.5+7.1	0.99	1.32	1.32	1.66	4.70	4.96	10.00	11.96	0.74	2.00	2.66	3.40	9.16	12.17	95	5.01	A	A++	4.62	6.46	1958	1.17
	1.5+2.0+2.0+3.5+3.5	1.20	1.60	1.60	2.80	2.80	4.21	10.00	11.55	0.67	2.05	2.66	3.05	9.39	12.17	95	4.88	A	A+	4.48	6.46	2018	1.2
	1.5+2.0+2.0+3.5+4.2	1.14	1.52	1.52	2.65	3.18	4.41	10.00	11.56	0.71	2.05	2.66	3.27	9.39	12.17	95	4.89	A	A+	4.47	6.46	2023	1.2
	1.5+2.0+2.0+3.5+5.0	1.07	1.43	1.43	2.50	3.57	4.64	10.00	11.70	0.71	2.04	2.67	3.27	9.34	12.22	95	4.92	A	A+	4.52	6.46	1998	1.19
	1.5+2.0+2.0+3.5+6.0	1.00	1.33	1.33	2.33	4.00	4.93	10.00	11.94	0.74	2.00	2.65	3.40	9.16	12.13	95	5.01	A	A++	4.60	6.46	1963	1.17

Combination tables

Heating

Outdoor unit	Indoor unit	Cooling capacity (kW)					Total capacity (kW)			Power input (kW)			Total current (A)			Power factor (%)	COP	ENERGY LABEL	Seasonal data				
		A room	B room	B room	C room	D room	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.				label	SCOP	Pdesign	AEC	Back-up heater capacity at -10°C
5MXM90N2V1B	1.5+2.0+2.0+4.2+4.2	1.08	1.44	1.44	3.02	3.02	4.61	10.00	11.58	0.74	2.05	2.66	3.40	9.39	12.17	95	4.90	A	A+	4.48	6.46	2016	1.19
	1.5+2.0+2.0+4.2+5.0	1.02	1.36	1.36	2.86	3.40	4.85	10.00	11.71	0.77	2.03	2.61	3.53	9.30	11.95	95	4.93	A	A+	4.54	6.46	1991	1.18
	1.5+2.0+2.0+5.0+5.0	0.97	1.29	1.29	3.23	3.23	5.07	10.00	11.84	0.79	2.00	2.66	3.61	9.16	12.17	95	5.02	A	A++	4.63	6.46	1954	1.16
	1.5+2.0+2.5+2.5+2.5	1.36	1.82	2.27	2.27	2.27	3.77	10.00	11.54	0.58	2.07	2.66	2.67	9.48	12.17	95	4.85	A	A+	4.43	6.46	2041	1.21
	1.5+2.0+2.5+2.5+3.5	1.25	1.67	2.08	2.08	2.92	4.07	10.00	11.55	0.65	2.06	2.66	2.97	9.43	12.17	95	4.87	A	A+	4.46	6.46	2027	1.21
	1.5+2.0+2.5+2.5+4.2	1.18	1.57	1.97	1.97	3.31	4.26	10.00	11.55	0.67	2.05	2.66	3.05	9.39	12.17	95	4.88	A	A+	4.47	6.46	2020	1.2
	1.5+2.0+2.5+2.5+5.0	1.11	1.48	1.85	1.85	3.70	4.50	10.00	11.69	0.70	2.04	2.67	3.18	9.34	12.22	95	4.91	A	A+	4.51	6.46	2005	1.19
	1.5+2.0+2.5+2.5+6.0	1.03	1.38	1.72	1.72	4.14	4.78	10.00	11.93	0.70	2.04	2.59	3.18	9.34	11.85	95	4.92	A	A+	4.53	6.46	1993	1.19
	1.5+2.0+2.5+2.5+7.1	0.96	1.28	1.60	1.60	4.55	5.10	10.00	11.96	0.77	2.00	2.57	3.53	9.16	11.76	95	5.01	A	A++	4.61	6.46	1959	1.18
	1.5+2.0+2.5+3.5+3.5	1.15	1.54	1.92	2.69	2.69	4.36	10.00	11.55	0.70	2.05	2.66	3.18	9.39	12.17	95	4.88	A	A+	4.48	6.46	2019	1.2
	1.5+2.0+2.5+3.5+4.2	1.09	1.46	1.82	2.55	3.07	4.55	10.00	11.56	0.74	2.05	2.66	3.40	9.39	12.17	95	4.89	A	A+	4.47	6.46	2024	1.2
	1.5+2.0+2.5+3.5+5.0	1.03	1.38	1.72	2.41	3.45	4.78	10.00	11.70	0.77	2.04	2.66	3.53	9.34	12.17	95	4.92	A	A+	4.52	6.46	1998	1.19
	1.5+2.0+2.5+3.5+6.0	0.97	1.29	1.61	2.26	3.87	5.07	10.00	11.94	0.77	2.00	2.66	3.53	9.16	12.17	95	5.02	A	A++	4.61	6.46	1962	1.16
	1.5+2.0+2.5+4.2+4.2	1.04	1.39	1.74	2.92	2.92	4.75	10.00	11.58	0.76	2.05	2.65	3.48	9.39	12.13	95	4.90	A	A+	4.48	6.46	2017	1.19
	1.5+2.0+2.5+4.2+5.0	0.99	1.32	1.64	2.76	3.29	4.99	10.00	11.71	0.79	1.99	2.66	3.61	9.11	12.17	95	5.04	A	A++	4.63	6.46	1950	1.18
	1.5+2.0+3.5+3.5+3.5	1.07	1.43	2.50	2.50	2.50	4.64	10.00	11.56	0.77	2.05	2.66	3.53	9.39	12.17	95	4.89	A	A+	4.49	6.46	2012	1.2
	1.5+2.0+3.5+3.5+4.2	1.02	1.36	2.38	2.38	2.86	4.85	10.00	11.58	0.79	2.05	2.65	3.61	9.39	12.13	95	4.90	A	A+	4.50	6.46	2006	1.19
	1.5+2.0+3.5+3.5+5.0	0.97	1.29	2.26	2.26	3.23	5.07	10.00	11.71	0.82	2.00	2.66	3.74	9.16	12.17	95	5.01	A	A++	4.61	6.46	1962	1.18
	1.5+2.0+3.5+4.2+4.2	0.97	1.30	2.27	2.73	2.73	5.04	10.00	11.59	0.85	2.04	2.65	3.87	9.34	12.13	95	4.91	A	A+	4.52	6.46	1999	1.19
	1.5+2.5+2.5+2.5+2.5	1.30	2.17	2.17	2.17	2.17	3.92	10.00	11.54	0.63	2.06	2.66	2.88	9.43	12.17	95	4.87	A	A+	4.46	6.46	2026	1.21
	1.5+2.5+2.5+2.5+3.5	1.20	2.00	2.00	2.00	2.80	4.21	10.00	11.55	0.67	2.03	2.66	3.05	9.30	12.17	95	4.94	A	A+	4.47	6.46	2020	1.2
	1.5+2.5+2.5+2.5+4.2	1.14	1.89	1.89	1.89	3.18	4.41	10.00	11.55	0.71	2.03	2.66	3.27	9.30	12.17	95	4.95	A	A+	4.49	6.46	2013	1.19
	1.5+2.5+2.5+2.5+5.0	1.07	1.79	1.79	1.79	3.57	4.64	10.00	11.69	0.71	1.98	2.67	3.27	9.07	12.22	95	5.06	A	A++	4.60	6.46	1964	1.18
	1.5+2.5+2.5+2.5+6.0	1.00	1.67	1.67	1.67	4.00	4.93	10.00	11.93	0.75	1.98	2.59	3.44	9.07	11.85	95	5.06	A	A++	4.63	6.46	1952	1.18
	1.5+2.5+2.5+3.5+3.5	1.11	1.85	1.85	2.59	2.59	4.50	10.00	11.55	0.71	2.03	2.66	3.27	9.30	12.17	95	4.95	A	A+	4.49	6.46	2013	1.19
	1.5+2.5+2.5+3.5+4.2	1.06	1.76	1.76	2.46	2.96	4.70	10.00	11.56	0.77	2.02	2.66	3.53	9.25	12.17	95	4.95	A	A+	4.50	6.46	2007	1.19
	1.5+2.5+2.5+3.5+5.0	1.00	1.67	1.67	2.33	3.33	4.93	10.00	11.70	0.79	1.97	2.66	3.61	9.02	12.17	95	5.09	A	A++	4.62	6.46	1957	1.18
	1.5+2.5+2.5+4.2+4.2	1.01	1.68	1.68	2.82	2.82	4.90	10.00	11.58	0.82	2.02	2.65	3.74	9.25	12.13	95	4.96	A	A+	4.52	6.46	2000	1.19
	1.5+2.5+3.5+3.5+3.5	1.03	1.72	2.41	2.41	2.41	4.78	10.00	11.56	0.79	2.02	2.66	3.61	9.25	12.17	95	4.95	A	A+	4.51	6.46	2006	1.19
	1.5+2.5+3.5+3.5+4.2	0.99	1.64	2.30	2.30	2.76	4.99	10.00	11.58	0.82	2.02	2.65	3.74	9.25	12.13	95	4.96	A	A+	4.52	6.46	2000	1.19
	1.5+3.5+3.5+3.5+3.5	0.97	2.26	2.26	2.26	2.26	5.07	10.00	11.58	0.85	2.00	2.65	3.87	9.16	12.13	95	5.00	A	A+	4.56	6.46	1981	1.18
	2.0+2.0+2.0+2.0+2.0	2.00	2.00	2.00	2.00	2.00	3.49	10.00	11.54	0.55	2.05	2.66	2.50	9.39	12.17	95	4.89	A	A+	4.47	6.46	2023	1.2
	2.0+2.0+2.0+2.0+2.5	1.90	1.90	1.90	1.90	2.38	3.63	10.00	11.54	0.56	2.05	2.66	2.58	9.39	12.17	95	4.90	A	A+	4.48	6.46	2017	1.19
	2.0+2.0+2.0+2.0+3.5	1.74	1.74	1.74	1.74	3.04	3.92	10.00	11.55	0.63	2.04	2.66	2.88	9.34	12.17	95	4.92	A	A+	4.51	6.46	2006	1.19
	2.0+2.0+2.0+2.0+4.2	1.64	1.64	1.64	1.64	3.44	4.12	10.00	11.55	0.65	2.03	2.66	2.97	9.30	12.17	95	4.93	A	A+	4.52	6.46	2000	1.18
	2.0+2.0+2.0+2.0+5.0	1.54	1.54	1.54	1.54	3.85	4.36	10.00	11.69	0.67	2.00	2.67	3.05	9.16	12.22	95	5.02	A	A++	4.61	6.46	1959	1.17
	2.0+2.0+2.0+2.0+6.0	1.43	1.43	1.43	1.43	4.29	4.64	10.00	11.93	0.68	1.99	2.59	3.10	9.11	11.85	95	5.03	A	A++	4.64	6.46	1948	1.17
	2.0+2.0+2.0+2.0+7.1	1.32	1.32	1.32	1.32	4.70	4.96	10.00	11.96	0.74	1.99	2.57	3.40	9.11	11.76	95	5.04	A	A++	4.66	6.46	1937	1.16
	2.0+2.0+2.0+2.5+2.5	1.82	1.82	1.82	2.27	2.27	3.77	10.00	11.54	0.58	2.04	2.66	2.67	9.34	12.17	95	4.91	A	A+	4.49	6.46	2010	1.19
	2.0+2.0+2.0+2.5+3.5	1.67	1.67	1.67	2.08	2.92	4.07	10.00	11.55	0.65	2.03	2.66	2.97	9.30	12.17	95	4.93	A	A+	4.52	6.46	1999	1.18
	2.0+2.0+2.0+2.5+4.2	1.57	1.57	1.57	1.97	3.31	4.26	10.00	11.55	0.67	2.03	2.66	3.05	9.30	12.17	95	4.94	A	A+	4.53	6.46	1993	1.18
	2.0+2.0+2.0+2.5+5.0	1.48	1.48	1.48	1.85	3.70	4.50	10.00	11.69	0.70	1.99	2.67	3.18	9.11	12.22	95	5.04	A	A++	4.62	6.46	1955	1.17
	2.0+2.0+2.0+2.5+6.0	1.38	1.38	1.38	1.72	4.14	4.78	10.00	11.93	0.70	1.99	2.59	3.18	9.11	11.85	95	5.05	A	A++	4.65	6.46	1944	1.16
	2.0+2.0+2.0+2.5+7.1	1.28	1.28	1.28	1.60	4.55	5.10	10.00	11.96	0.77	1.98	2.57	3.53	9.07	11.76	95	5.06	A	A++	4.67	6.46	1933	1.16
	2.0+2.0+2.0+3.5+3.5	1.54	1.54	1.54	2.69	2.69	3.77	10.00	11.54	0.58	2.03	2.66	2.67	9.30	12.17	95	4.94	A	A+	4.54	6.46	1992	1.18
	2.0+2.0+2.0+3.5+4.2	1.46	1.46	1.46	2.55	3.07	4.55	10.00	11.56	0.74	2.03	2.66	3.40	9.30	12.17	95	4.95	A	A+	4.55	6.46	1986	1.18
	2.0+2.0+2.0+3.5+5.0	1.38	1.38	1.38	2.41	3.45	4.78	10.00	11.70	0.77	1.99	2.66	3.53	9.11	12.17	95	5.04	A	A++	4.65	6.46	1941	1.16
	2.0+2.0+2.0+3.5+6.0	1.29	1.29	1.29	2.26	3.87	5.07	10.00	11.94	0.77	1.99	2.58	3.53	9.11	11.81	95	5.05	A	A++	4.68	6.46	1931	1.16
	2.0+2.0+2.0+4.2+4.2	1.39	1.39	1.39	2.92	2.92	4.75	10.00	11.58	0.76	2.02	2.65	3.48	9.25	12.13	95	4.95	A	A++	4.61	6.46	1961	1.17
	2.0+2.0+2.0+4.2+5.0	1.32	1.32	1.32	2.76	3.29	4.99	10.00	11.71	0.79	2.01	2.71	3.61	9.20	12.40	95	4.98	A	A++	4.66	6.46	1938	1.16
	2.0+2.0+2.5+2.5+2.5	1.74	1.74	2.17	2.17	2.17	3.92	10.00	11.54	0.63	2.04	2.66	2.88	9.34	12.17	95	4.91	A	A+	4.49	6.46	2011	1.19
	2.0+2.0+2.5+2.5+3.5	1.60	1.60	2.00	2.00	2.80	4.21	10.00	11.55	0.67	2.03	2.66	3.05	9.30	12.17	95	4.93	A	A+	4.52	6.46	1999	1.18
	2.0+2.0+2.5+2.5+4.2	1.52	1.52	1.89	1.89	3.18	4.41	10.00	11.55	0.70	2.03	2.66	3.18	9.30	12.17	95	4.94	A	A+	4.53	6.46	1993	1.18
	2.0+2.0+2.5+2.5+5.0	1.43	1.43	1.79	1.79	3.57	4.64	10.00	11.69	0.71	1.99	2.67	3.27	9.11	12.22	95	5.03	A	A++	4.63	6.46	1953	1.17
	2.0+2.0+2.5+2.5+6.0	1.33	1.33	1.67	1.67	4.00	4.93	10.00	11.93	0.75	1.99	2.59	3.44	9.11	11.85	95	5.04	A	A++	4.65	6.46	1942	1.16
	2.0+2.0+2.5+3.5+3.5	1.48	1.48	1.85	2.59	2.59	4.50	10.00	11.55	0.71	1.99	2.66	3.27	9.11	12.17	95	5.03	A	A++	4.60	6.46	1963	1.18
	2.0+2.0+2.5+3.5+4.2	1.41	1.41	1.76	2.46	2.96	4.70	10.00	11.56	0.77	1.99	2.66	3.53	9.11	12.17	95	5.04	A	A++	4.62	6.46	1957	1.18
	2.0+2.0+2.5+3.5+5.0	1.33	1.33	1.67	2.33	3.33	4.93	10.00	11.70	0.79	1.98	2.66	3.61	9.07	12.17	95	5.06	A	A++	4.67	6.46	1934	1.16
	2.0+2.0+2.5+4.2+4.2	1.34	1.34	1.68	2.82	2.82	4.90	10.00	11.58	0.82	1.99	2.70	3.74	9.11	12.36	95	5.05	A	A++	4.63	6.46	1951	1.17
	2.0+2.0+3.5+3.5+3.5	1.38	1.38	2.41	2.41	2.41	4.78	10.00	11.56	0.79	1.99	2.66	3.61	9.11	12.17	95	5.04	A	A++	4.62	6.46	1957	1.18
	2.0+2.0+3.5+3.5+4.2	1.32	1.32	2.30	2.30	2.76	4.99	10.00	11.58	0.82	1.99	2.70	3.74	9.11	12.36	95	5.05	A	A++	4.63	6.46	1951	1.17
	2.0+2.5+2.5+2.5+2.5	1.67	2.08	2.08	2.08	2.08	4.07	10.00	11.54	0.65	2.03	2.66	2.97	9.30	12.17	95	4.93	A	A+	4.52	6.46	1999	1.18
	2.0+2.5+2.5+2.5+3.5	1.54	1.92	1.92	1.92	2.69	4.36	10.00	11.55	0.70	2.03	2.66	3.18	9.30	12.17	95	4.95	A	A+	4.55	6.46	1987	1.18
	2.0+2.5+2.5+2.5+4.2	1.46	1.82	1.82	1.82	3.07	4.55	10.00	11.55	0.74	2.02	2.66	3.40	9.25	12.17	95	4.95	A	A+	4.56	6.46	1981	1.17
	2.0+2.5+2.5+2.5+5.0	1.38	1.72	1.72	1.72	3.45	4.78	10.00	11.69	0.77	1.99	2.67	3.53	9.11	12.22	95	5.05	A	A++	4.65	6.46	1942	1.16
	2.0+2.5+2.5+2.5+6.0	1.29	1.61	1.61	1.61	3.87	5.07	10.00	11.93	0.77	1.98	2.59	3.53	9.07	11.85	95	5.06	A	A++	4.68	6.46	1931	1.16
	2.0+2.5+2.5+3.5+3.5	1.43	1.79	1.79	2.50	2.50	4.64	10.00	11.55	0.77	1.99	2.66	3.53	9.11	12.17	95	5.03	A	A++	4.60	6.46	1963	1.17
	2.0+2.5+2.5+3.5+4.2	1.36	1.70	1.70	2.38	2.86	4.85	10.00	11.56	0.79	1.99	2.66	3.61	9.11	12.17	95	5.04	A	A++	4.62	6.46	1957	1.17
	2.0+2.5+2.5+3.5+5.0	1.29	1.61	1.61	2.26	3.23	5.07	10.00	11.70	0.82	1.98	2.66	3.74	9.07	12.17	95	5.06	A	A++	4.67	6.46	1934	1.16
	2.0+2.5+2.5+4.2+4.2	1.30	1.62	1.62	2.73	2.73	5.04	10.00	11.58	0.85	1.99	2.70	3.87	9.11	12.36	95	5.05	A	A++	4.63	6.46	1951	1.16
	2.0+2.5+3.5+3.5+3.5	1.33	1.67	2.33	2.33	2.33	4.93	10.00	11.56	0.82	1.99	2.66	3.74	9.11	12.17	95	5.04	A	A++	4.62	6.46	1957	1.17
	2.5+2.5+2.5+2.5+2.5	2.00	2.00	2.00	2.00	2.00	4.21	10.00	11.54	0.68	2.03	2.66	3.10	9.30	12.17	95	4.95	A	A+	4.55	6.46	1987	1.18
	2.5+2.5+2.5+2.5+3.5	1.85	1.85	1.85	1.85	2.59	4.50	10.00	11.55	0.72	2.02	2.66	3.31	9.25	12.17	95	4.96	A	A+	4.57	6.46	1975	1.17
	2.5+2.5+2.5+2.5+4.2	1.76	1.76	1.76	1.76	2.96	4.70	10.00	11.55	0.77	2.02	2.66	3.53	9.25	12.17	95	4.97	A	A+	4.59	6.46	1970	1.16
	2.5+2.5+2.5+2.5+5.0	1.67	1.67	1.67	1.67	3.33	4.93	10.00	11.69	0.80	2.00	2.67	3.66	9.16	12.22	95	5.00	A	A++	4.64	6.46	1946	1.15
	2.5+2.5+2.5+3.5+3.5	1.72	1.72	1.72	2.41	2.41	4.78	10.00	11.55	0.80	2.02	2.66	3.66	9.25	12.17	95	4.97	A	A++	4.60	6.46	1965	1.16
	2.5+2.5+2.5+3.5+4.2	1.64	1.64	1.64	2.30	2.76	4.99	10.00	11.56	0.82	2.01	2.66	3.74	9.20	12.17	95	4.98	A	A++	4.61	6.46	1959	1.16
	2.5+2.5+3.5+3.5+3.5	1.61	1.61	2.26	2.26	2.26	5.07	10.00	11.57	0.85	1.99	2.66	3.87	9.11	12.17	95	5.03	A	A++	4.66	6.46	1940	1.15

Notes

Notes

FSC

CARBON TRUST | ACCREDITED SUPPLIER

LLOYD'S REGISTER · LRQA — UKAS MANAGEMENT SYSTEMS 001 — ISO 9001

LLOYD'S REGISTER · LRQA — UKAS MANAGEMENT SYSTEMS 001 — ISO 14001

Daikin units comply with the European regulations that guarantee the safety of the product.

EUROVENT CERTIFIED PERFORMANCE www.eurovent-certification.com

Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU), Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com

Daikin products are distributed by:

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.

UKEPCEN18-1075 / 06.18 / DesignHQ. Copyright 2018 Daikin
Printed in the UK on FSC certified paper from sustainable sources.

Daikin Airconditioning UK Limited The Heights Brooklands Weybridge Surrey KT13 0NY Tel 0845 6419000 Fax 0845 6419009 daikin.co.uk

London South	London Central	London North	Western Region	Midlands Region	Northern Region	Scottish Region
0845 641 9355*	0845 641 9350*	0845 641 9360*	0845 641 9320*	0845 641 9370*	0845 641 9340*	0845 641 9330*

*Call charges to 0845 numbers are made up of a service charge (to the organisation you are calling) and an access charge (to your phone provider).
0845 calls to Daikin UK cost 0p per minute service charge. Please check your phone company's access charge separately.
Your mobile provider may charge more for these calls, if 0845 numbers are not included in your mobile package. Please check with your mobile provider.